

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

01-10-00

**UTILITY
PATENT APPLICATION
TRANSMITTAL**

Attorney Docket No. 9797-050-999 Total Pages 181

First Named Inventor or Application Identifier

ZERBE et al.

Express Mail Label No. EL 236 253 072 US

APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO: Assistant Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☒ Fee Transmittal Form
Submit an original, and a duplicate for fee processing
2. ☒ Specification [104 Pages]
(preferred arrangement set forth below)
- Descriptive title of the Invention
 - Cross Reference to Related Applications
 - Statement Regarding Fed sponsored R&D
 - Reference to Microfiche Appendix
 - Background of the Invention
 - Brief Summary of the Invention
 - Brief Description of the Drawings *(if filed)*
 - Detailed Description of the Invention *(including drawings, if filed)*
 - Claim(s)
 - Abstract of the Disclosure
3. ☒ Drawing(s) (35 USC 113) [Total Sheets 65]
4. ☒ Oath or Declaration (Unexecuted) [Total Sheets 5]
- a. ☐ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 17 completed)
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTORS(S)**
Signed statement attached deleting inventor(s) named in the prior application, see 37 CFR 1.63(d)(2) and 1.33 (b).
5. ☐ Incorporation By Reference *(useable if Box 4b is checked)*
The entire disclosure of the prior application, from which a copy of the oath or declaration is supplied under Box 4b, is considered as being part of the disclosure of the accompanying application and is hereby incorporated by reference therein.

6. ☐ Microfiche Computer Program *(Appendix)*
7. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

8. ☒ Assignment Papers (Unexecuted)
9. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)
10. ☐ English Translation Document *(if applicable)*
11. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
12. ☐ Preliminary Amendment
13. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)
14. ☐ Small Entity Statement filed in prior application, Status still proper and desired
15. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)
16. ☒ Other: Statement Regarding Commonly Assigned Applications

17. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: filed .**18. CORRESPONDENCE ADDRESS**☒ Customer Number or Bar Code Label

20583

*(Insert Customer No. or Attach bar code label here)*or ☐ Correspondence address below

NAME

ADDRESS

CITY

STATE

ZIP CODE

COUNTRY

TELEPHONE

FAX

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

LOW LATENCY MULTI-LEVEL COMMUNICATION INTERFACE

This application claims priority to U.S. Provisional Patent Application 60/158,189, titled “A Method and Apparatus for Receiving High Speed Signals with Low Latency,” which is hereby incorporated by reference for all purposes.

The present invention relates generally to a high frequency digital signal bus, and more particularly to a digital signal bus that uses multi-level signaling to increase the data rate of the bus.

BACKGROUND OF THE INVENTION

An efficient high speed signaling system requires the use of well-controlled waveforms. For example, in a high speed signaling system with a clock cycle time in the range of approximately one to two nanoseconds, the amplitude of the voltage swing, the rise and fall times, and the duty cycle of the signaling waveform should be within well-defined limits. The term “voltage swing” refers to a difference between a minimum predetermined voltage and a maximum predetermined voltage of a signal. For example, typical limits may include a voltage swing of approximately one volt, a near fifty percent duty cycle, and a rise and a fall time of approximately one hundred picoseconds (ps). In some systems, the voltage swing of CMOS signals ranges from a low of zero volts to a high of five volts. In other systems, the voltage swing of the CMOS signals ranges from a low of zero volts to a high of 2.5 volts.

A receiver system that receives and converts the high-speed, low swing waveforms to CMOS signals requires careful design, especially when multiple high-speed waveforms are received simultaneously and where noise is a significant factor.

The following naming convention will be used for signals. For example, the name “system clock” will refer to one signal, while that signal’s complement will be referred to as “system clock B” or “system clock_b.” In other words, the complement of a signal will have an upper or lower case “b” following its name.

As shown in Fig. 1, a prior art sampling receiver 100 has a sense-amplifier 102 and a latch 104. The sense amplifier 102 receives, senses and amplifies small changes in the input signal, Data In, with respect to a reference voltage V_{ref} , and outputs a differential signal, A and A_b. The latch 104 amplifies, stores and converts the differential signal, A and A_b, to predetermined low and high values.

Referring also to the timing diagram of Fig. 2, a system clock and its complement, system clock_b, control the operation of the sampling receiver 100. When system clock_b is transitions low the sense amplifier 102 is disabled. Two linear load/precharge transistors 112, 114 become active and pull signals A and A_b at nodes N_A and N_{A_b} to a high voltage level.

When system clock_b transitions high, the sense amplifier 102 is enabled and senses the voltage of the data input signal, Data In. The two linear load transistors 112, 114 become inactive. When the voltage of the data input signal, Data In, at the gate of input transistor 116 exceeds the reference voltage V_{REF} at the gate of transistor 118, the input transistor 116 becomes active and pulls output signal A_b to a low voltage level via a current sink 120.

When the data input signal is less than or equal to the reference voltage V_{REF} , the input transistor 116 is inactive (i.e., or at least less conductive than transistor 118) and the output signal A_b remains high.

The cross-coupled transistor pair 122, 124 stores the state of signals A and A_b. Initially, when system clock_b is low, transistors 112 and 114 are enabled and act as linear load

devices to the differential pair 116, 118. When system clock_b transitions high, transistors 112 and 114 become inactive and the cross-coupled pair 122, 124 is enabled to sense and amplify variations of the input data signal, Data In. When the voltage of the input signal, Data In, is less than the reference voltage V_{REF}, transistor 118 is active and pulls the voltage of signal A at node N_A to ground, which causes the voltage of signal A_b at node N_{A_b} to transition high. When the voltage of the input signal Data In exceeds the reference voltage V_{REF}, transistor 116 becomes active and pulls the signal A_b at node N_{A_b} low; in addition, transistor 118 becomes inactive and the signal A_b at node N_{A_b} is pulled high. The cross-coupled pair 122, 124 acts as an amplifier for small changes in the voltage of the input signal Data In with respect to the reference voltage V_{REF}.

When system clock_b transitions low, sense amplifier 102 is disabled and the complementary output signals A and A_b from the sense amplifier 102 are stored in latch 104. Latch 104 is enabled by the system clock.

In latch 104, an equalizing transistor 126 becomes active when the system clock transitions low and drives the output signals Out and Out_b to the same voltage level. When the system clock transitions high, the equalizing transistor 126 becomes inactive, latch-enable transistors 128, 130 become active and enable the latch-data-input transistors 132, 134 to act as a pull-down circuit when responding to the differential output signals A and A_b from the sense amplifier 102. In particular, when the system clock is high, the latch-data-input transistors 132, 134 are responsive to the amplified signals A and A_b. A four transistor latch circuit 136 latches the associated state of signals A and A_b, and generates the latched-output signals, Out 142 and Out_b 144. The four transistor latch circuit 136 includes transistors 152, 154, 156 and 158.

When the system clock transitions low, latch-enable transistors 128, 130 become inactive thereby causing the latch 104 to become non-responsive to signals A and A_b. In this way, the latch 104 captures the state of A and A_b at the high-to-low transition of the system clock. To reduce the probability of errors caused by noise, the timing of the high-to-low transition of the system clock should occur at a time when the differential amplitude between

the A and A_b signals is greatest. In addition, when a system has multiple receivers and drivers operating simultaneously, the likelihood of noise injection on V_{REF} and, consequently, errors is increased.

The circuit of Fig. 2 senses even data values, D0 and D2, in response to the falling edge of the system clock, and latches the even data values in response to the rising edge of the system clock. Another circuit, similar to the circuit of Fig. 2, operates on opposite clock edges senses and latches odd data values (e.g., sensing in response to the rising edge of the system clock) and latching in response to the falling edge of the system clock.

A Prior Art Integrating Receiver

In Fig. 3A, an integrating receiver 180 improves performance in a noisy environment. The integrating receiver 180 is a type of matched filter. In the integrating receiver 180, an integrator 182, a sample-and-hold (S/H) circuit 184, an amplifier 186 and a latch 188 are connected in series and receive and output differential signals. The integrating receiver 180 integrates a bias current I_{BIAS1} based on the difference between the differential input signals V_{IN+} and V_{IN-} over a given period of time, called the integration interval. Prior to the start of the integration interval, the output value of the integrator 182 is initially set equal to zero volts. After integration is complete and additional processing, the latch 188 stores the result of the integration.

Referring also to Fig. 3B, the integrating receiver 180 operates according to three phases - an integration phase (Phase I), a hold phase (Phase II) and a latch phase (Phase III). A first timing signal ϕ 192 and a second timing signal Ψ_b 194 define the phases and control the operation of the integrating receiver 180. The first timing signal ϕ defines the integration interval or phase and is a clock that operates at the system clock frequency. The second timing signal Ψ_b defines the hold and latch phases when the first timing signal ϕ is no longer in the integration phase. In some implementations, the first timing signal ϕ is phase shifted with respect to the system clock.

During Phase I, the integration interval, when the first timing signal ϕ is high, the integrator 182 receives differential input signals V_{IN+} 196 and V_{IN-} 198. The integrator 182 integrates a predetermined amount of current based on the polarity of the data input signals V_{IN+} 196 and V_{IN-} 198 and generates a differential integrated signal. The sample-and-hold circuit 184 receives the differential integrated signal output by the integrator 182, and the latch 188 is held in a reset state.

During Phase II, when the first timing signal ϕ and the second timing signal Ψ_b are low, the sample-and-hold circuit 184 samples and holds the state of the differential output signal from the integrator 182. The amplifier 186 also amplifies the output of the sample-and-hold circuit 184 and generates an amplified signal.

During Phase III, when the second timing signal Ψ_b is high and the first timing signal ϕ is low, the amplified signal is captured in the latch 188. The integrator 182 and the sample-and-hold circuit 184 are reset to receive the next differential data bit.

One important metric of the integrating receiver is its overall delay or latency, referred to herein as the input-to-output latency. The input-to-output latency is measured from the time when the data input signals V_{IN+} 196 and V_{IN-} 198 are validly present at the integrator input to the time when the captured signal is validly present at the output of the latch 188. In high-speed signaling systems and, in particular, in memory systems, the input-to-output latency should be as small as possible.

In Fig. 4, the integrator 182 and the sample and hold circuit 184 of Fig. 3 are shown in more detail. Integration occurs on nodes N_{INTA} 202 and N_{INTB} 204, with the capacitance of these nodes being determined by the inherent capacitance of the transistors coupled to them. In the integrator 182, a first current steering circuit 210 receives a bias current I_{BIAS} from a current source 212 and steers the bias current I_{BIAS} to either integration node N_{INTA} 202 or N_{INTB} 204 based on the differential input signal, V_{IN+} and V_{IN-} . The current source 212 includes a PMOS transistor M_3 214 that supplies the bias current I_{BIAS} in response to a bias voltage V_{BIAS} applied to the gate of transistor 214. In the current steering circuit 210, a first

differential input pair, transistors M₁ 206 and M₂ 208, receives the differential input signal V_{IN+} and V_{IN-}, respectively. When V_{IN-} is at a low voltage level, transistor M₁ 206 steers the bias current I_{BIAS} to node N_{INTA} 202, thereby charging node N_{INTA} and increasing the voltage V_{INT+} at node N_{INTA}. When V_{IN+} is at a low voltage level, transistor M₂ 208 steers the bias current I_{BIAS} to node N_{INTB}, thereby charging node N_{INTB} and increasing the voltage V_{INT-} at node N_{INTB}.

A compensating integration circuit 222 eliminates a source of error in the integrator 182 caused primarily by the gate to drain capacitance of transistors M₁ 206 and M₂ 208. In the compensating integration circuit 222, a second differential input pair, transistors M_{C1} 224 and M_{C2} 226, receives the differential input signals V_{IN+} 206 and V_{IN-} 208, respectively, and, functions as a current steering circuit to steer compensating bias current I_{BIASC} towards the integration nodes N_{INTA} and N_{INTB}. A compensating current source, PMOS transistor M_{C3} 228, provides the compensating bias current I_{BIASC}. The amount of current I_{BIASC} supplied by the compensating current source is also determined by the bias voltage V_{BIAS}. Transistor M_{C4} 230 pulls up the voltage at node tail to the power supply voltage V_{DD}.

An integrator reset circuit 240 resets the integrator 182 by removing any charge from the integration nodes N_{INTA} and N_{INTB} prior to integrating. The integrator 182 is reset during Phase III when ϕ_b and Ψ_b are high.

One disadvantage of this integrator 182 is that its input common-mode range is limited. The common mode of differential signals V_{IN+} and V_{IN-} is the average value of the two signals. The input common mode range is low in order that the first current steering circuit 210 can fully steer the integrating current I_{BIAS} and operate at a sufficiently high conductance to keep the PMOS current source transistor M₃ 214 in saturation. A low input common mode range limits the types of drivers and termination networks which may be used. Therefore, an integrator 182 with an increased input common mode range is desirable.

Another disadvantage is that the integrator 182 has a low voltage gain when either transistor 206 or 208 of the differential pair does not fully steer the current I_{BIAS} to either of the

integration nodes N_{INTA} and N_{INTB}. The low voltage gain A_v of the integrator 182 is determined by the following relationship:

$$A_v = ((V_{INT+}) - (V_{INT-})) / ((V_{IN+}) - (V_{IN-})). \quad (1)$$

- 5 Because of the low voltage gain A_v, the integrator 182 may require large input voltage swings to fully steer the current I_{BIAS} from the current source 214. Therefore, an integrator 182 that fully steers current smaller changes in the input voltage is also desirable.

10 Sample and Hold Circuitry

The sample and hold circuit 184 (Fig. 4) provides the differential integrated voltages, V_{INT+} and V_{INT-}, from the integrator 182 to the sense amplifier and latch, as sample output voltages, V_{o+} and V_{o-}. In the sample and hold circuit 184, transistors S1 250 and S2 252 are
15 connected in series to the integration nodes N_{INTA} and N_{INTB}, 202 and 204, respectively. The first timing signal ϕ is supplied to the gates of transistors S1 250 and S2 252, respectively. During Phase I, when the first timing signal ϕ is high, the differential voltage, V_{INT+} and V_{INT-}, on the integration nodes, N_{INTA+} and N_{INTB-}, is output by the sample and hold circuit 184 as V_{o+} and V_{o-}. During Phase II, when ϕ is low, transistors S1 250 and S2 252 are
20 inactive and the sampled voltages, V_{o+} and V_{o-}, remain on sampling nodes N_{SAMPA} 260 and N_{SAMPB} 262, respectively, because of the inherent capacitance of the sample and hold circuit 184. During Phase III, a reset circuit 254 drives the sample output voltage V_{o+} and V_{o-} on nodes, N_{SAMPA} 260 and N_{SAMPB} 262, respectively, to circuit ground to reset the sample and hold circuit 184.

25

Amplifier and Latch

Fig. 5 is a circuit diagram of the amplifier 186 and latch 188 of Fig. 3. The amplifier 186 amplifies the differential output of the sample-and-hold circuit, V_{o+} and V_{o-} , to generate amplified signals V_{A+} and V_{A-} , respectively, during Phases II and III. An amplifier current source 270, PMOS transistor 272, supplies an amplifier bias current I_{BIAS} to a differential PMOS pair, transistors 274 and 276 in response to the bias voltage V_{BIAS} . The bias voltage V_{BIAS} is sufficiently low with respect to the supply voltage to operate PMOS transistor 272 in the saturation region.

An amplifier equalizing transistor 278 becomes active during Phase I, when the first timing signal ϕ is high, to equalize the outputs, V_{A+} and V_{A-} , of the amplifier 186 such that the amplifier 186 outputs no differential voltage. During Phases II and III, when the first timing signal ϕ is low, the equalizing transistor 278 is inactive.

An amplifier load circuit 280 pulls one of the amplifier outputs, V_{A+} and V_{A-} , to ground when either of the input voltages V_{o+} or V_{o-} is sufficiently low to cause one of the PMOS transistors, 276 or 274, respectively, to become active. In the amplifier load circuit 280, NMOS transistor pairs 282, 284 connect to the transistors of amplifier differential pair 274, 276, respectively. The NMOS transistor pairs 282, 284 are cross-coupled such that, for example, when the amplifier output voltage V_{A+} is high, NMOS transistor pair 284 is inactive and NMOS transistor pair 282 is active and pulls V_{A-} low. Each NMOS transistor pair 282, 284 includes two NMOS transistors, 286 and 288, 292 and 294, respectively, connected in parallel.

Operating PMOS transistor 272 as a current source provides high gain-bandwidth for the latch 188 and reduces propagation delay. However, supplying the amplifier bias current I_{BIAS} in this way causes the amplifier 186 to consume static direct current and therefore static power. Static power is that power constantly being consumed by a circuit, regardless of its mode or data. Because the amplifier 186 consumes a significant amount of static power,

the amplifier 186 may be unsuitable for use in devices that use a large number of receivers. Therefore an amplifier for use in a receiver that reduces static power consumption is desirable.

The latch 188 is reset during Phases I and II, and stores the output of the amplifier 186 during Phase III. During Phases I and II, when Ψ_b is low, a latch-load-circuit that includes PMOS transistors 302 and 304, precharges the differential latch output, V_{L+} and V_{L-} , to the supply voltage. Also during Phases I and II, a latch output equalizing transistor 306 becomes active and causes the differential latch output V_{L+} and V_{L-} signals to be the same.

During Phase III, when Ψ_b is high, the latch-load-circuit and the latch output equalizing transistor 306 become inactive. A latch-input pair, NMOS transistors 308 and 310, receives the differential output of the amplifier 186. A first cross-coupled pair, transistors 312, 314, latches the state of the amplifier output signals, V_{A+} and V_{A-} . Pass transistors 316, 318 are active and supply the output of the first cross-coupled pair 312, 314 as differential latch output signals, V_{L+} and V_{L-} . A second cross-coupled pair, transistors 320, 322, latches the state of the differential latch output signals, V_{L+} and V_{L-} , to improve the gain of the latch.

The output of the latch 188, and therefore the output of the integrating receiver 180, is valid after the beginning of Phase III. The input-to-output latency of the integrating receiver 180 is equal to the duration of Phase I plus the duration of Phase II plus the duration of the latch output delay from the beginning of Phase III. Therefore, the input-to-output latency consumes a significant portion of the system clock period. In particular, the input-to-output latency consumes a large amount of time relative to a typical clock cycle time of approximately two nanoseconds (ns) for high speed signaling systems, and potentially limits the performance of the system in which the integrating receiver is used. Therefore, an integrating receiver with reduced input-to-output latency is desirable.

In computer systems, to increase the amount of data transferred on a clock cycle, the number of data lines of the data bus is increased. On the chip, each line of the data bus uses a pin for an external connection. However, the number of pins from the chip is limited. Therefore, an

apparatus and method that increases the amount of data transferred during a single clock cycle without increasing the number of output pins is also desirable.

SUMMARY OF THE INVENTION

5

A memory system uses multiple pulse amplitude modulation (multi-PAM) output drivers and receivers to send and receive multi-PAM signals. A multi-PAM signal has more than two voltage levels, with each data interval now transmitting a “symbol” at one of the valid voltage levels. In one embodiment, a symbol represents two or more bits. The multi-PAM output driver drives an output symbol onto a signal line. The output symbol represents at least two bits that include a most significant bit (MSB) and a least significant bit (LSB). The multi-PAM receiver receives the output symbol from the signal line and determines the MSB and the LSB.

10

15

In particular, in a multi-PAM output driver, a first drive block generates an MSB symbol component representing the MSB. A second drive block generates an LSB symbol component representing the LSB. The LSB symbol component is combined with the MSB symbol component to provide the output symbol.

20

In a multi-PAM bus receiver, an input symbol representing two or more bits is received. Each bit is associated with at least one threshold voltage of a set of threshold voltages. At least one integrator generates integration voltages on integration nodes by integrating a voltage associated with the input symbol, based on one or more threshold voltages of the set of threshold voltages. At least one sense amplifier receives the integration voltages of at least one integrator to generate at least one logic signal representing the relationship of the input symbol to a range of voltages defined by the one or more threshold voltages of the set of threshold voltages.

25

In another aspect of the invention, in a receiver, an integrator generates integrated signals based on input signals, and a sense amplifier samples and converts the integrated signals to a logic signal. The combination of the integrator and sense amplifier reduces the input-to-output latency from the time when an input signal is valid to when the output of the sense amplifier is valid. This receiver has low static power consumption and a wide input common mode range.

In particular, the receiver accumulates a charge to produce an output voltage during an integration time interval in accordance with a data input signal, samples the output voltage and holds and converts the sampled voltage into a logic signal such that the logic signal represents the polarity of the data input signal. The input-to-output latency is defined as the time from when the data input signal is valid to when the logic signal is valid. This input-to-output latency is approximately equal to the integration time plus the time to convert the sampled voltage. The input-to-output latency is lower than the input-to-output latency of the prior art receivers described above; and therefore improves system performance.

In yet another aspect of the invention, a preamplifier conditions the input signal and provides the conditioned input signal to the integrator.

In another aspect of the invention, rather than using an integrator, a preamplifier is connected to a sense amplifier that incorporates an integration function.

In a system having multiple receivers, each receiver receives adjusted timing signals to compensate for skew in the received signals. In an alternate embodiment, the receivers have an equalization circuit to compensate for intersymbol interference. In another aspect of the invention, an offset cancellation circuit removes any manufacturing induced voltage offsets from mismatched devices in the receiver. In yet another aspect of the invention, a multi-phased receiver system uses multiple receivers to increase bus speed.

A memory device incorporates the integrating receiver of the present invention.

BRIEF DESCRIPTION OF THE DRAWINGS

These and other features, aspects, and advantages of the present invention will become better understood with regard to the following description, appended claims, and accompanying drawings where:

Fig. 1 is a circuit diagram of a prior art sampling receiver.

Fig. 2 is a timing diagram of the sampling receiver of Fig. 1.

Fig. 3A is a block diagram of a prior art integrating receiver.

Fig. 3B is a timing diagram of control signals used by the integrator of Fig. 3A.

Fig. 4 is a circuit diagram of an integrator and a sample-and-hold circuit used in the integrating receiver of Fig. 3A.

Fig. 5 is a circuit diagram of an amplifier and latch of the integrating receiver of Fig. 3A.

Fig. 6 is a block diagram of a memory controller and memories using an integrating receiver and bus output driver of the present invention.

Fig. 7A is a block diagram of the integrating receiver of Fig. 6 according to an embodiment of the present invention.

Fig. 7B is a block diagram of the integrating receiver of Fig. 6 that receives data on alternate edges of a clock signal according to another embodiment of the present invention.

Fig. 8 is a timing diagram of the integrating receiver of Fig. 7A.

Fig. 9 is a block diagram of the integrating receiver of Fig. 6 according to an alternate embodiment of the present invention.

5 Fig. 10 is a circuit diagram of a preamplifier according to an embodiment of the present invention of Fig. 7A;

Fig. 11A is a block diagram of an integrator according to an embodiment of the present invention of Figs. 7A and 9.

10 Fig. 11B is a circuit diagram of an integrator according to an embodiment of the present invention of Figs. 7A and 9.

Fig. 11C is a circuit diagram of the integrator of Fig. 11B modified to receive two differential
15 output signals from the preamplifier of Fig. 10 in accordance with the integrator of Fig. 7A.

Fig. 12 is a circuit diagram of an integrator according to an alternate embodiment of the integrator of Fig. 7A.

20 Fig. 13 is a circuit diagram of an integrator of Fig. 7A according to another embodiment of the present invention.

Fig. 14A is a circuit diagram of a sense amplifier and latch according to an embodiment of the present invention of Figs. 7A and 9.

25 Fig. 14B is a circuit diagram of a sense amplifier and latch according to an alternate embodiment of the present invention of Figs. 7A and 9.

Fig. 15 is a circuit diagram of another embodiment of an integrating receiver that includes the
30 preamplifier of Fig. 10 and a sense amplifier according to the present invention.

Fig. 16 is a timing diagram of adjusted precharge and sense signals to generate a reliable data window for the integrating receiver of Fig. 7A.

Fig. 17A is a timing diagram of an alternate embodiment of the reliable data window for integrating of Fig. 16.

5

Fig. 17B is a block diagram of a circuit to generate the reliable data window of Fig. 17A.

Fig. 17C is a timing diagram of another alternate embodiment for defining the reliable data window for integrating.

10

Fig. 17D is a circuit that implements the timing diagram of Fig. 17C.

Fig. 18 is a block diagram of the distribution of a system clock in a bus architecture having multiple receivers.

15

Fig. 19 is a timing diagram of the system clock and exemplary data signals of the bus architecture of Fig. 18.

Fig. 20 is a block diagram of an adjustment system that adjusts the timing of the precharge and sense signals of the integrating receivers of Fig. 18.

20

Fig. 21 is a timing diagram for the adjustment system of Fig. 20.

Fig. 22 is a circuit diagram of an adjustable delay element of the adjustment system of Fig. 20.

25

Fig. 23A is an alternate embodiment of an adjustment system to set the timing of each receiver in a system having multiple integrating receivers.

30 Fig. 23B is a timing diagram for the circuit of Fig. 23A.

Fig. 24 is a block diagram of a multi-phased bus architecture using four integrating receivers of the present invention.

Fig. 25 is a timing diagram for the multi-phased bus architecture of Fig. 24.

5 Fig. 26A is a circuit diagram of an equalization circuit that compensates for inter-symbol interference according to another embodiment of the integrating receiver of Fig. 7A.

Fig. 26B is an exemplary equivalent circuit diagram illustrating the components of Fig. 26A that form a voltage divider.

10

Fig. 26C is an exemplary equivalent circuit diagram representing the circuit of Fig. 26B as a voltage divider.

15

Fig. 27A is a circuit diagram of a voltage offset cancellation circuit for the integrating receiver according to yet another embodiment of the integrating receiver of Fig. 7A.

Fig. 27B is an exemplary equivalent circuit representing the circuit of Fig. 27A as a voltage divider.

20

Fig. 28A is a graph of the accumulated voltage between the integration nodes of the integrator of the present invention when integrating a system clock with a fifty percent duty cycle.

Fig. 28B is a circuit diagram of a phase detector that adds static current sources to the integrator of the present invention to determine the phase of the system clock.

25

Fig. 28C is a graph of the voltage between the integration nodes of the circuit of Fig. 28B.

Fig. 28D is a circuit diagram of a phase detector that increases the capacitance of a capacitive element of the integrator of the present invention to determine the phase of the system clock.

30

Fig. 29 is a graph of the transitions between data bits in a multi-PAM system that encodes the voltage levels of two data bits using Gray coding.

Fig. 30 is a circuit diagram of a multi-PAM output driver according to an embodiment of the present invention.

5

Fig. 31 is a circuit diagram of a multi-PAM output driver according to another embodiment of the present invention.

Fig. 32A is a graph showing gds distortion.

10

Fig. 32B shows the data bits, not in gray code, and the effect of gds distortion on the output voltage of the output driver.

Fig. 32C shows the data bits in gray code, and the effect of gds distortion on the output voltage of the output driver.

15

Fig. 33A is a circuit diagram of a multi-PAM output driver that corrects for gds distortion.

Fig. 33B is a circuit diagram of an alternate embodiment of a combinational logic circuit of Fig. 33A.

20

Fig. 34 is a circuit diagram of circuit to reduce switching noise at an output pin.

Fig. 35 is a circuit diagram of a multi-PAM output driver that corrects for gds distortion as shown in Fig. 33A and reduces switching noise as shown in Fig. 34.

25

Fig. 36 is a circuit diagram of an alternate embodiment of a multi-PAM output driver that corrects for gds distortion.

Fig. 37A is a circuit diagram of a multi-PAM output driver that corrects for gds distortion and provides current control.

Fig. 37B is a circuit diagram of a set of stacked transistor pairs of the circuit of Fig. 37A.

5 Fig. 38 is a circuit diagram of a current control calibration circuit that sets the current control bits of Fig. 37A.

Figs. 39A and 39B are a flowchart of a method of calibrating the current control bits using the circuit of Fig. 38 for the output driver of Fig. 37A.

10 Fig. 40 is a block diagram of a multi-PAM receiver system.

Fig. 41 is a block diagram of the MSB and LSB receivers of Fig. 40 that uses a preamplifier to compare an input voltage to a reference voltage for even and odd data.

15 Fig. 42 is a block diagram of an alternate embodiment of the MSB and LSB receivers of Fig. 40 that does not use a preamplifier and compares the input voltage to the reference voltage in the integrator for even and odd data.

20 Fig. 43 is a circuit diagram of a multi-PAM receiver for odd data according to an embodiment of the present invention.

Fig. 44 is a circuit diagram of a preamplifier for the multi-PAM receiver according to another embodiment of the present invention.

25 Fig. 45A is a circuit diagram of a NMOS multi-PAM preamplifier according to another embodiment of the present invention;

30 Fig. 45B is a circuit diagram of a PMOS multi-PAM preamplifier according to an alternate embodiment of the present invention.

Fig. 46 is a circuit diagram of a 4-PAM preamplifier for the most-significant bit.

Fig. 47 is a circuit diagram of a multi-PAM integrator according to an embodiment of a LSB folded integrator of Fig. 41.

- 5 Fig. 48 is a table showing the correspondence between the input signal voltage levels and the currents in the integrator of Fig. 47.

Fig. 49 is a circuit diagram of an on-chip multi-PAM reference voltage generator.

- 10 Fig. 50 is a circuit diagram of a receiver timing circuit of Fig. 40.

Fig. 51 is a circuit diagram of a receiver delay generator of Fig. 50.

- 15 Fig. 52A is a block diagram of a chip using the multi-PAM receiver system of the present invention.

Fig. 52B is a block diagram of a chip using an alternate embodiment of the multi-PAM receiver system of the present invention.

- 20 Fig. 53 is a diagram of a circuit for automatically detecting a multi-PAM mode.

Fig. 54A is a diagram of an exemplary slave device capable of operating at either 2-PAM or 4-PAM in accordance with an embodiment of the present invention.

- 25 Fig. 54B is a diagram of a data bus operating at 2-PAM using the device of Fig. 54A.

Fig. 54C is a diagram of a data bus operating at 4-PAM using the device of Fig. 54A.

Fig. 55 is a block diagram of a multi-PAM bus system.

Fig. 56 is a flowchart of a method for determining a multi-PAM mode as a function of error rate.

Fig. 57 is a flowchart of a method of error recovery for a multi-PAM system.

- 5 Fig. 58 is a block diagram of a signal line of a bidirectional bus that simultaneously transmits signals in both directions that uses the multi-PAM receiver of the present invention.

Fig. 59 is a timing diagram showing the superposition of signals in the bidirectional bus of Fig. 58.

10

Fig. 60A is a diagram of ideal eye-patterns generated while testing a multi-PAM receiver to determine operational limits.

Fig. 60B is a diagram of a combination of the eye-patterns of Fig. 60A.

15

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

In Fig. 6, a bus 320 interconnects a memory controller 321 and memories 322. The bus 320 is formed of signal lines 320-1, 320-2 that transmit address, data and control signals.

20

Physically, on each integrated circuit 321, 322, the address, data and control signals are supplied to and output from external connections, called pins, and the bus 320 interconnects respective pins. The bus 320 may be implemented as traces on a printed circuit board, wires or cables and connectors. Each of these integrated circuits 321, 322 has bus output driver circuits 323 that connect to the pins to interface with the bus 320 to transmit signals to other ones of the integrated circuits. In particular, the bus output drivers 323 in the memory controller 321 and in the memories 322 transmit data over the bus 320. Each bus output driver 323 drives a single signal line of the bus 320. For example, bus output driver 323-1 in the memory controller 321 drives bus line 320-1. The bus 320 supports signaling with

25

characteristics that are a function of many factors such as the system clock speed, the bus length, the amount of current that the output drivers can drive, the supply voltages, the spacing and width of the wires or traces making up the bus 320, the physical layout of the bus itself and the resistance of a terminating resistor Z_0 attached to each bus.

5 At least a subset of the signal lines connect to pull-up resistors Z_0 that connect to a termination voltage V_{TERM} . In some systems, all signal lines connect to pull-up resistors Z_0 that connect to the termination voltage V_{TERM} . The termination voltage V_{TERM} can be different from the supply voltage V_{DD} . In one embodiment, the supply voltage V_{DD} is equal to 2.5 volts, the termination voltage V_{TERM} is equal to 1.8 volts, the bus voltage for a signal at
10 low level V_{OL} is equal to 1.0 volts, and the voltage swing is 0.8 volts. The resistance of the terminating resistors Z_0 is equal to twenty-eight ohms.

The output drivers 323 are designed to drive the bus 320 with a predetermined amount of current; and the bus receivers 324 are designed to receive the signals sent by the bus drivers
15 323 on the bus 320. In a device, each bus receiver 324 receives signals from one signal line of the bus 320. The bus receivers 324 are integrating receivers according to the present invention.

In one embodiment, the memories are random access memories (RAMs). In an alternate
20 embodiment, the memories are read-only memories (ROMs). Alternately, the bus output drivers 323 and bus receivers 324 of the present invention are implemented in other semiconductor devices that use a bus to interconnect various types of integrated circuits such as microprocessors and disk controllers.

25 In the exemplary memory system of Fig. 6, the memory controller 321 supplies an address to the memory 322-1 using signal line 320-1 to transmit one bit of the address. For simplicity, the other signal lines transmitting the address are not shown. In the memory 322-1, a bus receiver 324-3 receives the address bit and passes the received address to a decoder 325. To receive the entire address, the decoder 325 receives address bits from multiple bus receivers
30 324. The decoder 325 generates the signals to access the data stored at a particular row and

column of a memory cell array 326. In response to other control signals from the bus 320 and the decoder 325, for a read operation, the memory cell array 326 supplies data at the desired address to an input/output (I/O) buffer 327 which supplies the data to the bus 320 via the output driver 323-4. Although data is supplied with multiple signal lines and receivers, for simplicity, only one signal line for supplying data is shown. For a write operation, the memory controller 321 supplies an address which reaches the memory cell array 326 via the decoder 325 as described above. The memory controller 321 also supplies data signals via the output driver 323-2 to the bus 320. The memory 322-1 receives the data signals via the receiver 324-4 and passes the data to the memory cell array 326 for storage via the I/O buffer 327.

Although a bus that uses current mode signaling has been described with respect to Fig. 6, the apparatus and method of the present invention may be used in any signaling system where it is desirable to distinguish between signals having different voltage levels.

Fig. 7A illustrates an integrating receiver 330 according to one embodiment of the invention. The integrating receiver 330 has a wide common mode range, a large output voltage swing and low input-to-output latency. In the integrating receiver 330, a preamplifier 332, an integrator 334, and a sense amplifier and latch 336 are connected in series. The preamplifier 332 receives differential input signals V_{IN} 342 and V_{IN_B} 344 and generates two pairs of differential output signals, V_{PDATA} and V_{PDATA_B} , V_{NDATA} and V_{NDATA_B} , 346 and 348, respectively. The input signals V_{IN} 342 and V_{IN_B} 344 are supplied externally with respect to the device implementing the integrating receiver 330. In particular, the input signals V_{IN} 342 and V_{IN_B} 344 are from a bus and may be control, address or data signals.

The integrator 334 integrates current based on the differential output signals 346, 348 from the preamplifier 332 and a precharge signal 352 to generate differential integration voltages V_A , V_B , V_C and V_D at nodes A, B, C and D, respectively. In particular, the integrator 334 integrates the current based on whether one differential input voltage is greater than the other differential input voltage. The differential integration voltages form pairs 354, 356 as follows: V_A and V_B , V_C and V_D , respectively. In response to the sense signal 358, the sense amplifier

and latch 336 senses the pairs of differential integration voltages V_A and V_B 354, V_C and V_D 356, and converts the integration voltages into CMOS outputs V_{OUT} 360, V_{OUT_B} 362 for use in subsequent stages of circuitry.

In one embodiment, each differential input signal V_{IN} 342 and V_{IN_B} 344 is provided on a
5 separate signal line of a data bus, e.g., fully differential signaling. However, this doubles the number of signal lines of the data bus, and doubles the number of pins on the device. In another embodiment, a single input signal is provided on a signal line of a bus. In an alternate embodiment, a single-ended signaling scheme is used in which V_{IN} 342 is received directly from a signal line of the data bus; and, a predetermined reference voltage is supplied
10 to the preamplifier rather than the complement of the input signal V_{IN_B} 344.

Fig. 7B illustrates an alternate embodiment of the integrating receiver of Fig. 6 that further increases data throughput by integrating during both phases of the system clock. Fig. 7B is the same as Fig. 7A except for showing two additional integration-sense amp-latch blocks
15 333. The integrating receiver of Fig. 7A is also discussed below with respect to Fig. 41.

As discussed above with respect to the circuit of Fig. 2, the circuit of Fig. 7B operates on opposite or complementary clock edges to sense and latch odd data values and even data values. For example, odd data values are sensed and latched in response to one set of edges
20 of the system clock, and even data values are sensed and latched in response to complementary edges of the one set of edges of the system clock.

As shown in Fig. 8, the timing of the integrating receiver 330 reduces the input-to-output latency as compared to the receiver of Fig. 3A. Fig. 8 shows the relationship between a
25 system clock 364, the input signal V_{IN} 342, the precharge signal 352, the sense signal 358 and the integrating receiver output voltage V_{OUT} . The timing diagram for V_{IN} 342 and V_{OUT} 360 also applies to the complementary signals V_{IN_B} 344 and V_{OUT_B} 362. However, for simplicity, V_{IN_B} 344 and V_{OUT_B} 362 are not shown.

The precharge signal 352 defines two phases of activity for the integrator 334 -- integrate 372 and precharge 374. The sense signal 358 defines two phases of activity for the sense amplifier and latch 336 -- hold-and-sense 376 and precharge 378. Two timing events define the boundaries for these phases. The first timing event is the Release of Precharge 380 which starts the integration phase during which the integrator 334 integrates the input signal from the preamplifier 332. The second timing event is the Activation of Sense 382 for the sense amplifier 336, which causes the sense amplifier and latch 336 to resolve the differential integration voltages from the integrator 334 and hold the results. The integration phase 372 of the integrator 334 (Fig. 7) overlaps the hold-and-sense phase 376 of the sense amplifier 336 (Fig. 7) to provide a stable input signal to the sense amplifier and latch 336 (Fig. 7). Because of the overlap between the hold-and-sense phase 376 and the integration phase 372, from the perspective of the sense amplifier 336 (Fig. 7), integration is ended when the sense amplifier 336 (Fig. 7) is activated in response to the rising edge of the sense signal 358, even though the integrator 334 continues to integrate. The output from the sense amplifier and latch 336, V_{OUT} 360 and V_{OUT_B} 362, is valid shortly after Activation of Sense 382, thereby reducing the input-to-output latency 384 of the integrating receiver by eliminating the separate hold phase.

The timing of the integrating receiver reduces the input-to-output latency because no timing edges control the flow of the sensed data after the activation of sense 382. The output voltages, V_{OUT} 360 and V_{OUT_B} 362, are available after the propagation delay (the clock-to-Q delay) of the sense amplifier and latch, where the clock-to-Q delay begins at the activation of sense 382. In this way, the input-to-output latency of the receiver is reduced. As shown in Fig. 8, the input-to-output latency 384 is substantially less than the period of the system clock 364. Because the input-to-output latency is reduced, the performance of the system can be increased.

In Fig. 9, an alternate embodiment of an integrating receiver system 390 of the present invention eliminates the preamplifier 332 of Fig. 7, and uses the integrator 334 and the sense amplifier 336 as described above. Rather than receiving input signals from the preamplifier, the integrator 745 receives the input signals V_{IN} 342 and V_{IN_B} 344 directly from an external

data bus on both differential input pairs 346, 348. In other words, the lines receiving differential input signals V_{NDATA} and V_{PDATA} (Fig. 7) now receive input V_{IN} 342 (Fig. 9), and the lines receiving differential input signals V_{NDATA_B} and V_{PDATA_B} (Fig. 7) now receive V_{IN_B} 344 (Fig. 9). The sense amplifier 336 provides the output of the integrating receiver, V_{OUT} 360 and V_{OUT_B} 362 for use by subsequent circuit stages. The timing diagram of Fig. 8 also applies to the block diagram of Fig. 9.

By eliminating the preamplifier, the input-to-output latency can be further reduced because precharge can be asserted earlier in the data cycle because the input to the integrator becomes valid earlier. In addition, the integrating receiver 390 has reduced circuit complexity, uses less power, die space is saved and is less expensive than the integrating receiver of Fig. 7.

Circuits that implement each block of Figs. 7 and 9 will now be described.

Preamplifier

Fig. 10 illustrates the preamplifier of Fig. 7, according to one embodiment of the present invention. The preamplifier 332A improves the operation of the integrating receiver by reducing its sensitivity to asymmetries in the input voltage swing by supplying conditioned signals to the integrator based on the input signal. Asymmetric swings in the integrator input voltage can cause errors in the output voltage and timing. The preamplifier 332A allows the voltage swing of the input signal to be reduced while maintaining saturated integrator operation for a given integration current and integration capacitance as the preamplifier 332A provides some gain. As a further advantage, the preamplifier 332A helps to ensure that the inputs to the integrator have a common mode voltage sufficient to maintain saturated current steering as well as current source saturation in the integrator. Fully saturated current steering improves the gain of the integrator.

In single ended signaling schemes, in which one input is a fixed voltage reference rather than the complement of the input signal, the preamplifier 332A reduces timing offsets because the

preamplifier 332A provides “pseudo-differential” output signals in which the outputs appear to be differential. As defined above, the common mode of two signals is the average value of the two signals. The common mode of the pseudo-differential output signals changes for single-ended signaling schemes. In contrast, the common mode for differential signaling using V_{IN} 342 and V_{IN_B} 344 remains substantially unchanged. Using a preamplifier in a single-ended signaling scheme provides output signals that more closely approximate differential output signals and therefore reduces the effect of common mode.

In Fig. 10, the preamplifier 332A receives external input signals V_{IN} and V_{IN_B} , 342 and 344. The preamplifier 332A has two amplifier sections, the p-section 402 and the n-section 404. Each amplifier section 402, 404 receives both input signals V_{IN} and V_{IN_B} , 342 and 344, respectively. The p-section 402 provides differential outputs V_{PDATA} 346-1 and V_{PDATA_B} . The n-section 404 provides differential outputs V_{NDATA} 348-1 and V_{NDATA_B} 348-2.

In the p-section 402, a p-section amplifier 406 includes a differential PMOS pair which differentially receives input signals V_{IN} 342 and V_{IN_B} 344. The differential PMOS pair includes PMOS transistors 408 and 410. A PMOS current source 412 is coupled between the sources of the transistors of the PMOS pair 406 and the supply voltage V_{DD} . The PMOS current source 412 is a PMOS transistor 414 that is responsive to a PMOS bias voltage V_{BIASP} which determines a PMOS bias current I_{BIASP} .

NMOS load transistors 416, 418 are coupled between the drains of the PMOS transistors of the PMOS pair 408, 410, respectively, and ground. The gate of each NMOS load transistor 414, 416 is connected to the supply voltage V_{DD} , so that the NMOS load transistors 414, 415 operate in the linear region as resistors. Alternately, resistors may be used. The differential output of the p-section amplifier, V_{PDATA} 346-1 and V_{PDATA_B} 346-2 is supplied by the drains of the transistors of the PMOS pair 408, 410. Preferably, during operation of the p-section amplifier 402, the common mode voltage of the input signals V_{IN} 342, V_{IN_B} 344 is low with respect to V_{DD} , e.g., between ground and $V_{DD}/2$.

In an n-section amplifier 422, a differential NMOS pair of NMOS transistors 424, 426 differentially receives the input signals V_{IN} 342 and V_{IN_B} 344. An NMOS current source 428 is coupled between the sources of the pair of NMOS transistors 424, 426 and circuit ground. The NMOS current source 428 is an NMOS transistor 430 that is responsive to an NMOS bias voltage V_{BIASN} which determines an NMOS bias current I_{BIASN} . PMOS load transistors 432, 434 are coupled between the drains of the NMOS transistors of the differential NMOS pair 424, 426, respectively, and ground and operate in the linear region. The gate of each PMOS load transistor 432, 434 is connected to ground. The outputs, V_{NDATA} 348-1 and V_{NDATA_B} 348-2, of the n-section amplifier 404 are supplied by the drains of the transistors of the NMOS pair 424, 426. Preferably, during operation of the n-section amplifier 404, the common mode voltage of the input signals V_{IN} 342, V_{IN_B} 344 is high with respect to ground, e.g., between $(V_{DD}/2)$ and V_{DD} .

Using two differential amplifier sections 402, 404 results in a preamplifier capable of handling a wide range of input common mode voltages at least equal to a range between the supply voltages, V_{DD} and ground. The bias voltages V_{BIASP} and V_{BIASN} are selected to operate the current source transistors in saturation and provide a common mode range between zero (circuit ground) and the supply voltage V_{DD} . Alternately, to select input voltage thresholds, the bias voltages can be selected to not operate either one of or both the current source transistors in saturation. In another alternate embodiment, the bias voltages are adjusted during operation to dynamically change the common mode range.

Integrator

As shown in Fig. 11A, in one embodiment, the present invention provides an integrator 334A with a wide common mode range and a large output voltage swing. The integrator 334A generates differential output voltages, V_A and V_B , V_C and V_D , that are proportional to a predetermined amount of integration current I , rather than the input voltage. In response to the voltage of the input signal V_{IN} 342, first and second current steering circuits 432, 434, steer the predetermined integration current to charge or discharge a pair of capacitive

elements 436, 438 which are connected back-to-back. In particular, the current steering circuits 432, 434 charge and discharge the nodes 436A and 436B, and 438A and 438B of the capacitive elements 436, 438, respectively, via the first and second integrator current sources 439, 440, respectively.

5 As will be seen below, because the first current steering circuit 432 is implemented with PMOS transistors, and the second current steering circuit 434 is implemented with NMOS transistors, the integrator 334 has a wide common mode range, and is, therefore, applicable to a broader range of transmitted data. In addition, by integrating on both sides of the capacitive elements 436, 438, the invention provides a larger output voltage swing and thus a larger
10 voltage gain than is obtained when one side of the capacitive elements 436, 438 is connected to a fixed voltage in a conventional configuration. Because either one of the current steering circuits 432, 434 may integrate the back-to-back capacitive elements 436, 438, the integrator 334 is also less sensitive to asymmetry of the input signal if the voltage of the input signal V_{IN} 342 is outside a range that activates one of the current steering circuits.

15 The integrator 334 will next be explained with respect to the circuit diagrams of Fig. 11B and Fig. 11C, and then will be explained in more detail with respect to the circuit diagram of Fig. 12. The integrators 334A and 334B of Figs. 11A and 11B, respectively, correspond to the integrator 334 of Fig. 9.

20 In Fig. 11B, the integrator 334A of Fig. 11A is shown in more detail. The integrator 334B directly receives the differential input signals V_{IN} 342 and V_{IN_B} 344, and outputs two pairs of differential voltages V_A and V_B , V_C and V_D . The first current steering circuit 432 includes a pair of PMOS transistors 442, 444; and the second current steering circuit 434 includes a pair
25 of NMOS transistors 446, 448. The current steering circuits 432, 434 receive the input signals V_{IN} 342 and V_{IN_B} 344. The first integrator current source 439 is coupled between the sources of the PMOS transistors 442, 444 and the supply voltage V_{DD} , and supplies a current I_{INT1} . The second integrator current source 440 is coupled between the sources of the NMOS transistors 446, 448 and ground, and sinks an amount of current I_{INT2} . Preferably the amount
30 of current I_{INT1} from the first integrator current source 439 is the same as the amount of

current I_{INT2} from the second integrator current source 440. The first capacitive element C_1 436 is connected between the drain of PMOS transistor 442 and the drain of NMOS transistor 446. The drain of the PMOS transistor 442 is Node A 354-1 and outputs voltage V_A . The drain of NMOS transistor 446 is Node C 356-1 and outputs voltage V_C . A second capacitive element C_2 438 is connected between the drain of PMOS transistor 444 and the drain of NMOS transistor 448. The drain of the PMOS transistor 444 is Node B 354-2 and outputs voltage V_B . The drain of NMOS transistor 448 is Node D 356-2 and outputs voltage V_D .

The timing diagram of Fig. 8 applies to this integrator circuit 334. As discussed above, the integrating activity has two phases, Integrate and Precharge as defined by the precharge signal.

A precharge circuit 460 is coupled to output nodes A, B, C and D. In an A-B precharge circuit 462, a pair of NMOS transistors 464, 466 are coupled to nodes A and B, respectively. To precharge nodes A and B when the precharge signal is high, the NMOS transistors 464, 466 pull output nodes A and B to ground. Therefore the voltages V_A and V_B will be precharged to the circuit ground. In a C-D precharge circuit 470, a pair of PMOS transistors 472, 474 are coupled to output nodes C and D, respectively. When the complement of the precharge signal, Precharge_B 476, is low, the PMOS transistors 472, 474 pull output nodes C and D to the supply voltage V_{DD} ; therefore the voltages V_C and V_D will be precharged to the supply voltage V_{DD} .

In the current steering circuits 432, 434, complete steering of the input transistors 442-448 ensures that the integrator's output voltage will be directly proportional to the polarity of the differential input voltages during the integration interval, rather than being directly proportional to the amplitude of the differential input voltages. During operation, the input transistors may not be fully steered; and the common mode of the input voltages affects the steering of the input transistors. The input voltages V_{IN} and V_{IN_B} have three common mode ranges, and each common mode range has a different effect on the integrator 334. The common mode ranges will be described with respect to input signal V_{IN} , but also apply to the complementary input signal V_{IN_B} . For input signal V_{IN} , the first range of common mode

voltages is that range near ground which activates PMOS transistor pair 442, 444, but is not sufficiently high to appreciably activate NMOS transistor pair 446, 448. In this first range of common mode voltages, the second integrator current source 440 may not be operating in the saturation region and this may provide less current.

5 The second range of common mode voltages is that range near the supply voltage which activates the NMOS transistor 446 but is not sufficiently low to appreciably activate the PMOS transistor 442. In this second range of common mode voltages, the first integrator current source 440 may be unable to supply the integration current I_{INT1} .

10 The third range of voltages is a middle range in which both the NMOS and PMOS transistors 446, 442, respectively, are activated, and each current source 439, 440 supplies its respective amount of current. In this third range, the respective nodes 436A and 436b of the capacitive element 436 are charged with current I_{INT1} and discharged with current I_{INT2} .

15 The output of the integrator 334 is the voltage difference between node A and node B added to the voltage difference between nodes C and D. In other words, the output of the integrator 334 can be defined by the following relationship:

$$(V_A - V_B) + (V_C - V_D).$$

20

The integrator 334B of the present invention outputs a differential voltage between at least two pairs of nodes and uses at least two current sources. By contrast the prior art integrator discussed above with reference to Fig. 4 outputs a differential voltage between only one pair of nodes and uses one current source. The integrator 334B of the present invention also has

25 at least one pair of transistors that are active in any range of common mode voltages.

Preferably, the integrator 334B operates in the third range of common mode voltages in which both current sources charge and discharge the respective nodes of the capacitive elements to increase the gain of the integrator and improve voltage sensitivity.

The amplitude of the differential input voltage swing, $v_{DM} = (V_{IN} - V_{IN_B})$, is another factor considered in the operation of the integrator. Ideally, the integrator 334 operates based on the polarity of the differential input voltage; and, the magnitude of the differential input voltage swing v_{DM} does not affect the operation of the integrator 334. However, in practice, the magnitude of the differential input voltage v_{DM} affects the operation of the integrator 334. If the magnitude of the differential input swing v_{DM} is not sufficiently large, the input transistor pairs 442, 444, 446 and 448 will not be fully steered and will not act like perfect switches in steering the full amount of current to or from its respective integration node.

Placing the first capacitive element 436 between nodes A and C and the second capacitive element 438 between nodes B and D improves the effective circuit gain in the third or middle range of voltages. The first capacitive element 436 has capacitance C_1 and the second capacitive element 438 has capacitance C_2 . Preferably the first and second capacitive elements have the same capacitance.

The circuit gain G of the integrator 334B is defined as the current I divided by the differential input voltage v_{DM} (i.e., $I/(v_{DM})$). The ratio of the circuit gain G to the integration capacitance C , or G/C , is another parameter considered in the integrator operation. The output voltage of the integrator 334B is directly proportional to the circuit gain G and the ratio G/C . The larger the circuit gain and the ratio G/C , the larger the output voltage that is presented to the sense amplifier while maintaining the input transistor pairs in saturation for a given charging or discharging current (I_{INT-1} , I_{INT-2}) and capacitance (C_1 , C_2). When the input pairs 442, 444, and 446, 448 are in switched with large ΔV , the ratio G/C approaches the value $\frac{2I}{C}$ for the circuit of Fig. 11A, where the current I_{INT1} is equal to the current I_{INT2} with value I , and that current I from the current sources flows to a single capacitor at any time, i.e., perfect switching.

In the circuit of Fig. 11B, the value of the ratio G/C approaches that of perfect switching because the effects of imperfect switching are substantially reduced. During imperfect switching, the portion of integration current not steered to the intended capacitive element is used to charge the other capacitive element. For example, if $0.6I$ rather than I flows through

transistor 442 and capacitive element 436, then $0.4I$ would flow through transistor 444 and to capacitive element 438. In other words, the portion of current not flowing into capacitive element 436 is used to charge capacitive element 438. Similarly, if $0.6I$ flows through transistor 448 from capacitive element 438, then $0.4I$ flows through transistor 446 from capacitive element 436. In other words, the portion of current not flowing from capacitive element 438 is used to discharge capacitive element 436. Therefore, the charging current for each capacitive element approaches I to maximize the ratio G/C .

Parasitic capacitance C_p , represented by capacitors 482, 484, 486 and 488, on the integration nodes A, B, C and D, respectively, reduces the value of the ratio G/C from the ideal value because the current intended to charge the respective capacitive element is also used to charge or discharge the parasitic capacitance on those nodes.

In an alternate embodiment shown in Fig. 11C, the integrator 334B of Fig. 11B is modified to operate with the preamplifier of Fig. 10. Because the integrator 334C of Fig. 11C is used with the preamplifier, the common mode range of the integrator 334C is improved. The integrator 334C receives two pairs of differential output signals V_{PDATA} and V_{PDATA_B} , and V_{NDATA} and V_{NDATA_B} from the preamplifier. PMOS input transistors 442 and 444 receive V_{PDATA} and V_{PDATA_B} , and NMOS input transistors 446 and 448 receive V_{NDATA} and V_{NDATA_B} , respectively.

In Fig. 12, another embodiment of the integrator 334D of the present invention compensates for the effects of parasitic capacitance. The integrator 334D receives the two pairs of differential output voltages from the preamplifier, V_{PDATA} and V_{PDATA_B} , V_{NDATA} and V_{NDATA_B} , and outputs two pairs of differential voltages V_A and V_B , V_C and V_D . In the integrator 334, a first current steering circuit includes a first input differential pair of PMOS transistors 502 and 504, and a second current steering circuit includes a second input differential pair of NMOS transistors 506 and 508. The input signals to the PMOS transistors 502 and 504 are V_{PDATA} and V_{PDATA_B} , respectively. The input signals to the NMOS transistors 506 and 508 are V_{NDATA} and V_{NDATA_B} , respectively. The first and second current steering circuits were described above. The implementation of the first and second integrator

current sources, 439 and 440, with a PMOS and NMOS transistor, 512 and 514, and bias voltages, $V_{BIASP-I}$ and $V_{BIASN-I}$, respectively, was also described above.

The gate to drain capacitance of the input transistors 502-508 (device overlap capacitance) causes the input signals to couple across the gates to the drains of the input transistors 502-508 and thus into the nodes A and B, and C and D. To compensate for the effects of gate to drain capacitance, first and second compensating current steering circuits 520, 521, respectively, are added to inject matching error currents into the nodes A, B, C and D.

The first compensating current 520 steering circuit includes a pair of PMOS transistors 522 and 524; and the second compensating 521 current steering circuit includes a pair of NMOS transistors 526 and 526. The first and second compensating current steering circuits 520, 521 also receive the input signals, V_{PDATA} and V_{PDATA_B} , and V_{NDATA} and V_{NDATA_B} , respectively. The PMOS transistors 522 and 524 steer current from a first compensating current source 530, while the NMOS transistors 526 and 528 steer current from a second compensating current source 532. The first and second compensating current sources 530 and 532 include transistors 534 and 536 which are biased by bias voltages $V_{BIASP-I}$ and $V_{BIASN-I}$, respectively. The first and second compensating current sources 530 and 532 supply a much smaller amount of current I_c than the integration current sources 439 and 440, respectively.

In the first compensating current steering circuit 520, the drains of the input transistors 522 and 524 are connected to nodes B and A, respectively. In other words, the drains of transistors 522 and 524 are connected in a manner opposite to the drains of the input transistors 502 and 504, respectively. In the second compensating current steering circuit 521, the drains of the other pair of input transistors 526 and 528 are connected to nodes D and C, respectively. In other words, the drains of transistors 526 and 528 are connected in a manner opposite to the drains of the input transistors 506 and 508, respectively. Connecting the drains of the input transistors of the respective compensating current steering circuit in the opposite manner to that of the current steering circuit causes the compensating current steering circuit to cancel the charge injected via the gate to drain overlap capacitance.

Parasitic capacitance on nodes ptail and ntail also causes an error by generating an erroneous charge that is injected onto one of the nodes. The compensating current steering circuits 520, 521 also provide a sufficient matching tail capacitance to charge the opposite node to substantially cancel the error from this parasitic capacitance.

- 5 The integrator 334D also includes capacitive elements 436 and 438. The capacitive elements 436, 438 are the same, and the following description of capacitive element 436 also applies to capacitive element 438. The capacitive element 436 includes a p-element C1 540 connected in parallel to an n-element C2 542. The p-element 540 is a PMOS device with its source and drain shorted together. The n-element 542 is an NMOS device with its source and drain
10 shorted together.

- A first precharge circuit 560 precharges nodes A, B, C and D as described above with respect to Fig. 8, in response to the precharge signal. In the precharge circuit 560, equalizing transistors 562, 564 are used to ensure that the respective nodes are precharged to the same
15 potential. Precharge transistors 566-572 precharge nodes A, B, C, and D as described above with respect to Fig. 11B.

- The timing diagram of Fig. 8 also applies to the integrator 334D of Fig. 12. When precharge is active, the precharge circuit 560 sets nodes A and B at the ground potential and nodes C
20 and D to the supply voltage V_{DD} . During the integration interval, the precharge circuit 560 is inactive and the capacitive elements 436 and 438 are charged and discharged accordingly. The integrator of Fig. 12 has also two differential output voltages. The first differential output voltage, $V_A - V_B$, is supplied by nodes A and B and the second differential output voltage, $V_C - V_D$, is supplied by nodes C and D. Combining the first and second differential
25 output voltages provides the total output voltage of the integrator as described in the following relationship:

$$(V_A - V_B) + (V_C - V_D) .$$

In an alternate embodiment, the integrator 334D of Fig. 12 receives the inputs V_{IN} and V_{IN_B} from the data bus directly without the use of the preamplifier. In this way, the preamplifier can be eliminated to save power, reduce die size and reduce the input-to-output latency. To do so, V_{IN} is received rather than V_{PDATA} and V_{NDATA} at transistors 502 and 506; and V_{IN_B} is received rather than V_{PDATA_B} and V_{NDATA_B} at transistors 504 and 508. In another alternate
5 embodiment, a reference voltage is supplied to the integrator 334D, rather than the complementary input signal V_{IN_B} .

Referring to Fig. 13, an alternate embodiment of an integrator 334E receives the differential data signals V_{IN} and V_{IN_B} and outputs one pair of differential signals V_A and V_B . The
10 integrator 334E of Fig. 13 is another alternate embodiment of the integrator 334 of Fig. 9. In the integrator 334E, a current steering circuit includes transistors 442, 444, 446 and 448. The current steering circuits of Fig. 13 operate in the same manner as the current steering circuits of Fig. 11B and will not be further described. The integrator current sources 439 and 440
15 supply the integration current I to the current steering circuit. Unlike the integrator 334B of Fig. 11B, the integration node pairs, A and C, and B and D, are connected to respective nodes 436A and 438A of the capacitive elements to provide one pair of integration nodes, A and B, respectively. Each capacitive element 436, 438 is connected between an integration node and ground. In one embodiment, the capacitive elements 436, 438 are capacitors. Alternately, the capacitive elements 436, 438 are implemented with transistors as in Fig. 12. The timing
20 diagram of Fig. 8 also applies to the integrator 334E of Fig. 13.

An equalizing precharge transistor 580 is coupled between the integration nodes A and B. When the precharge signal is high, the equalizing precharge transistor 580 becomes active and equalizes the output voltages V_A and V_B , ideally to a level equal to half the supply
25 voltage, $\frac{V_{DD}}{2}$.

When a negative differential input voltage v_{DM} , where v_{DM} is equal to $V_{IN} - V_{IN_B}$, is sufficient to fully steer the current of the first and second input pairs, 442-44, 446-448, is received, capacitive element 436 is charged with current I and capacitive element 438 is

discharged with current I. The differential output voltage $V_A - V_B$ is defined by the following relationship:

$$V_A - V_B = (2 I / C) \cdot (\text{Integration Time}).$$

- 5 When the differential input voltage v_{DM} is not sufficiently large to operate the input transistors in saturation and fully steer the current I from the current source into one or the other of the integration nodes A and B (partial steering), the differential output voltage $V_A - V_B$ is reduced. For example, if the differential input voltage v_{DM} is such that an amount of current equal to 0.6 I flows through transistor 442, an amount of current equal to 0.4 I flows through transistor 444, an amount of current equal to 0.6 I flows through transistor 448, an amount of current equal to 0.4 I flows through transistor 446, and assuming all input transistors are matched, then the differential output voltage, $V_A - V_B$, is defined by the following relationship:

15
$$V_A - V_B = ((0.6 - 0.4) + (0.6 - 0.4)) \cdot (I / C) \cdot (\text{Integration Time})$$

- The effects of partial steering on the differential output voltage of the circuit of Fig. 13 is substantially reduced in comparison to the circuits of Figs. 11A, 11B, 11C and 12. In addition, the integrator of Fig. 13 precharges the integration nodes A and B to a voltage equal to one-half of the supply voltage V_{DD} , and does not allow for the voltage levels provided by precharging the integration nodes to ground and the supply voltage.

- In an alternate embodiment, the integrator 334E of Fig. 13 is modified to receive two pairs of differential output signals V_{PDATA} and V_{PDATA_B} , and V_{NDATA} and V_{NDATA_B} from the preamplifier of Fig. 10. PMOS input transistors 442 and 444 receive V_{PDATA} and V_{PDATA_B} , and NMOS input transistors 446 and 448 receive V_{NDATA} and V_{NDATA_B} , respectively.

Sense Amplifier

In Fig. 14A, in one embodiment of the sense amplifier and latch circuit 335 of Figs. 7 and 9, a sense amplifier and latch circuit 336A that consumes a low amount of static power is shown.

In the sense amplifier and latch circuit 336A, a sense amplifier 600A operates in accordance with the timing diagram of Fig. 8, described above, using the Sense and Sense_B signals, 358 and 602, respectively.

When the Sense_B signal 602 is high and the Sense signal 358 is low, NMOS pass transistors 604 and 606 and PMOS pass transistors 608 and 610, become active and allow the received differential input voltages V_A and V_B , V_C and V_D , respectively, to flow into the sense amplifier circuitry 600. A first differential input pair of PMOS transistors 612, 614 receives the differential input voltages V_A and V_B from the NMOS pass transistors 604, 608, respectively. The sources of the PMOS transistors 612 and 614 of this first PMOS input pair are connected to the supply voltage. When Sense_B is low, PMOS transistors 616, 618 help to charge the drains of the first PMOS input transistor pair 612, 614 to the supply voltage. When Sense_B is high, PMOS transistors 616, 618 are inactive.

A cross-coupled pair of PMOS transistors 620, 622, acts as a latch and couples the differential PMOS pair 612, 614 to the sense amplifier output nodes, sData_B and sData, respectively. The drain of PMOS transistor 612 is coupled to a sense amplifier output node sData_B via PMOS transistor 620. The drain of PMOS transistor 614 is coupled to another output node of the sense amplifier, sData, via PMOS transistor 622. The gate of PMOS transistor 620 is coupled to output node sData and the gate of PMOS transistor 622 is coupled to output node sData_B. The output nodes sData and sDataB are precharged to the supply voltage when the Sense signal is low by PMOS transistors 624 and 626, respectively.

A second differential input pair, NMOS transistors 628, 630 receives the voltages V_C and V_D from the PMOS pass transistors 608, 610, respectively. The sources of the transistors 628, 630 of the second input pair are connected to NMOS transistor 632 at the node labeled as

“tail” which drives the voltage on the sources to ground when the Sense signal is high. When the sense signal is low, NMOS transistor 632 is inactive.

Another cross-coupled transistor pair 634, 636, acts as a latch and couples the second differential input pair 628, 630 to the sense amplifier output nodes, sData_B and sData, respectively. The drain of input NMOS transistor 628 is coupled to the output node sData_B via NMOS transistor 634 and the drain of input NMOS transistor 630 is coupled to the output node sData via NMOS transistor 636. The gate of transistor 634 is coupled to output node sData and the gate of pass transistor 636 is coupled to output node sData_B.

- 10 When the Sense signal 358 is high, NMOS transistors 638, 640 help to discharge the drains of the transistors of second input pair 628, 630, respectively. When the Sense signal 358 is low, NMOS transistors 638 and 640 are inactive.

- 15 During operation when the Sense signal 358 is low, the first and second differential input pairs, 612 and 614, 628 and 630, respectively, do not provide a path for current to flow from the supply voltage to ground. During this time the sense amplifier 600 follows the voltages V_A , V_B , V_C and V_D supplied at the inputs to the first and second differential input pairs 612 and 614, 628 and 630, respectively.

- 20 When the Sense signal transitions high, pass transistors 604-610 become inactive. The NMOS transistor 632 becomes active and couples the tail node to ground so that current can flow through the sense amplifier 600A for a short time, thereby activating the sense amplifier 600A. During this time the sense amplifier 600A determines the output voltages V_s and V_{s_B} on output nodes sData and sData_B, respectively, according to the state of the input voltages V_A , V_B , V_C and V_D at the time that the Sense signal 358 transitioned high. When the
25 common mode of the input signals is out of range, PMOS transistors 616, 618 supply current to the drains of the first input pair 612, 614 and NMOS transistors 638, 640 draw current from the drains of the second input pair 628, 630, respectively.

For example, when the input voltage V_C is greater than input voltage V_D , the NMOS input pair 628, 630 removes more current from output node $sData_B$ than from output node $sData$, thereby pulling the voltage V_{s_B} on node $sData_B$ to ground faster than the voltage V_s on node $sData$. When the input voltage V_A is greater than the input voltage V_B , the PMOS input pair 612, 614, supplies more current to output node $sData$ than to output node $sData_B$. This tends to pull the voltage V_s on node $sData$ towards the supply voltage faster than the voltage V_{s_B} on node. While current flows from the supply voltage through NMOS transistor 632 to ground, the cross-coupled transistors 620, 622, 634, 636 will cause the voltage V_{s_B} on node $sData_B$ to transition to ground and the voltage V_s on node $sData$ to transition to the supply voltage. As the voltage V_{s_B} on node $sData_B$ decreases, PMOS transistor 622 sources an increasing amount of current and increases the voltage V_s on the node $sData$. As the voltage V_s on node $sData$ increases, NMOS transistor 634 sinks an increasing amount of current and pulls the voltage V_{s_B} on node $sData_B$ node to ground. The output voltages V_s and V_{s_B} on nodes $sData$ and $sData_B$ stabilize rapidly and the cross-coupled pairs 620 and 622, 634 and 636 latch the state of V_s and V_{s_B} and block the flow of current through the circuit from the supply voltage to ground. Therefore, the sense amplifier 600A again consumes a low amount of dynamic power, and little or no static power. The voltages V_A , V_B , V_C and V_D applied to the gates of the input transistors 612, 614, 628, 630 are not affected by the operation of the sense amplifier 600 which allows the differential pairs 612, 614, 628, 630 to operate properly during the sense operation.

In an alternate embodiment, the sense amplifier 600A does not include NMOS transistors 638 and 640, and PMOS transistors 616 and 618. The transistors 616 and 618, and 638 and 640, provide alternate paths for current to flow from the supply voltage to ground, respectively, when the input transistors 612 and 614, and 628 and 630 do not provide such a path. An input pair of transistors, 612 and 614, and 628 and 630, does not provide a path for current to flow when operated outside its common mode range.

Latch

In Fig. 14A, a latch circuit 650A receives and stores the output of the sense amplifier 600A. A first pair of inverters 652, 654 receive the voltages V_s and V_{s_B} from the output nodes sData and sData_B, respectively from the sense amplifier 600A. A differential input pair of NMOS transistors 656, 658 receives the outputs of the first pair of inverters 654, 652, respectively. The sources of the transistors of the NMOS input pair 656, 658 are connected to circuit ground and the drains are coupled to a pair of cross-coupled transistors 660, 662 which act as a latch to store the state of the output voltages V_s and V_{s_B} from the sense amplifier 600A to provide the latch outputs. To form the cross-coupled pair, the PMOS transistor 660 is coupled between the drain of input transistor 656 and the supply voltage and PMOS transistor 662 is coupled between the drain of input transistor 658 and the supply voltage. The gate of PMOS transistor 660 is coupled to the drain of input transistor 658 and the gate of PMOS transistor 662 is coupled to the drain of input transistor 656. Inverters 664, 666 connect to the output of the cross-coupled pair 660, 662 to generate the latch output voltages, V_{OUT} and V_{OUT_B} , respectively.

The latch 650A stores the state of the voltages V_s and V_{s_B} on nodes sData and sData_B when one of the voltages V_s or V_{s_B} is low. When one of the inverters of the first pair of inverters 652, 654 receives a low logic signal, that inverter drives the gate of the corresponding NMOS input transistor high causing the latch to change states if the previous state of the latch was opposite to the current state of the latch. For example, when V_s at node sData is high and V_{s_B} at node sData_B is low, inverter 654 drives the gate of NMOS transistor 656 high which causes node lData_B to transition low and the latch output V_{OUT} to transition high. When node lData_B is low, PMOS transistor 662 is active and node lData is pulled high. The operation of the latch 650A is not affected when the sense amplifier is precharged because, during precharge, the voltages output by the sense amplifier V_s and V_{s_B} are pulled high.

Referring to Figs. 10, 12 and 14A, the operation of the integrating receiver system of Fig. 7 will now be described using the preamplifier of Fig. 10, the integrator of Fig. 12 and the sense amplifier and latch of Fig. 14A.

The preamplifier 332A continuously receives the external input signals V_{IN} 342 and V_{IN_B} 344 and continuously provides two pairs of differential output voltages, V_{PDATA} 346-1 and V_{PDATA_B} 346-2, and V_{NDATA} 348-1 and V_{NDATA_B} 348-2, to the integrator 334.

Referring also to Fig. 8, the integrator 334 operates with two phases, Integrate and Precharge according to the Precharge signal 352. During the Precharge phase, the integrator 334 precharges the voltages V_A and V_B at output nodes A and B, respectively, to ground, and precharges the voltages V_C and V_D at output nodes C and D, respectively, to the supply voltage. The integrator output nodes A and B are coupled to the A and B inputs of sense amplifier 600 and integrator nodes C and D are coupled to the C and D inputs of sense amplifier 600. The sense amplifier 600A operates in response to the Sense signal 358 of Fig. 8. While the integrator 334 and sense amplifier 600A are in their respective precharge phases, the sense amplifier 600A receives the voltages V_A and V_B which are at a ground potential on its A and B nodes, respectively, and receives the voltages V_C and V_D which are at a supply voltage potential on its C and D nodes, respectively. The pass transistors 604-610 of the sense amplifier 600A couple the voltages V_A , V_B , V_C and V_D to the gates of the differential input transistors 612, 614, 628, 630 of the sense amplifier 600A, thus precharging internal nodes of the sense amplifier. The output voltages V_S and V_{S_B} of the sense amplifier 600A are held at the supply voltage by the precharge transistors 624, 626, and are equalized by an equalizing transistor 627. During precharge, the latch 650A stores the previous state output of the sense amplifier 600A and the output voltages V_{OUT} and V_{OUT_B} remain unchanged.

The start of a new cycle begins with the Release of Precharge which begins the Integrate phase of the integrator 334 (Fig. 12). During this time integration nodes A, B, C, D are released from their precharged voltages and begin to change or discharge according to the polarity of input signals from the preamplifier V_{PDATA} , V_{PDATA_B} , V_{NDATA} and V_{NDATA_B} and

integrating current I_{INT} , and the capacitance of the integrator 334. When the input voltage to the preamplifier V_{IN} is less than V_{IN_B} , the output of the preamplifier V_{PDATA} has a lower voltage than V_{PDATA_B} and V_{NDATA} has a lower voltage than V_{NDATA_B} . The voltages V_{PDATA} , V_{PDATA_B} , V_{NDATA} and V_{NDATA_B} are supplied to the integrator 334 causing the voltage V_A at node A to increase from the precharged ground potential and the voltage V_D at node D to decrease from the precharged supply voltage. During the Integrate time but before the Activation of Sense, the Sense amplifier 600 follows the voltages V_A , V_B , V_C and V_D at nodes A, B, C and D, respectively. After a predetermined integration time, the Activation of Sense event occurs, which prevents the sense amplifier 600 from following the voltages V_A , V_B , V_C and V_D and causes the sense amplifier 600A to generate output voltages V_s and V_{s_B} which represent the state of the voltages present on the input transistor pairs of the sense amplifier at the time the Activation of Sense event occurred. For example, the voltage V_s at node sData becomes a logical one and voltage V_{s_B} at node sData_B becomes a logical zero. A short time after the sense amplifier 600A determines the logical state of its outputs, latch 650 changes state, if necessary, to cause output the voltage V_{OUT} as a logical one and V_{OUT_B} as a logical zero.

A short time after the Activation of Sense event, the integration nodes A, B, C and D are precharged for the next cycle, and slightly before the end of the cycle the sense amplifier 600A returns to its sampling state to prepare for the next cycle. The inputs to the differential input pairs of the sense amplifier 600A are also precharged through their respective pass gate transistors during this time.

The latch 650 thus outputs voltages V_{OUT} and V_{OUT_B} representing a CMOS equivalent of the polarity of input signals, V_{IN} and V_{IN_B} , shortly after the Activation of Sense event. The input-to-output latency 384 of this integrating receiver is approximately equal to the time between the Release of Precharge 380 and Activation of Sense 384 plus the time from Activation of Sense to sense amplifier and latch output 383.

Alternate Embodiment of the Sense Amplifier and Latch

In Fig. 14B, in another embodiment of the sense amplifier and latch 336 of Figs. 7 and 9, a sense amplifier and latch 336B consumes even less static power than the sense amplifier and latch 336A of Fig. 14A. The circuit of Fig. 14B is similar to the circuit of Fig. 14A and the differences will be described. In a sense amplifier 600B, PMOS transistors 618 and 618 (Fig. 14A), and NMOS transistors 638 and 640 (Fig. 14A) are not used. The precharge transistors 624 and 626 (Fig. 14A) are also removed. Removing the precharge transistors further reduces the amount of static power consumed. The equalizing transistor 627 (Fig. 14B) is also removed. In the sense amplifier 600B, a differential pair of equalizing transistors 627a and 627b is placed between the sData and sData_B nodes. When the sense and senseb signals are not active, the transistors 627a and 627b are active and cause the sData and sData_B signals to have the same voltage. When the sense and sense_b signals become active, the transistors 627a and 627b become inactive and allow the V_{S_B} and V_{S_B} signals on the sData and sData_B nodes, respectively, to transition to the sensed voltages.

In the latch 650, when the V_S and V_{S_B} signals on the sData and sData_B nodes are equalized, the latch 650 does not change state. When the V_S and V_{S_B} signals on the sData and sData_B nodes are not equalized, the latch 650 can change state in response to the V_{S_B} and V_{S_B} signals. For example, the V_S and V_{S_B} signals transition between high and a low, respectively, when the voltage difference between the V_S and V_{S_B} signals is equal to an NMOS threshold voltage of V_T . NMOS transistor 653 becomes active and provides a low voltage level to the cross-coupled inverters 655 and 657 which act as a latch; and, NMOS transistor 659 becomes inactive. In response to the low voltage level of the V_{S_B} signal, inverter 655 outputs a high voltage level, and inverter 657 outputs a low voltage level to latch the state of the the V_S and V_{S_B} signals. Driver inverters 664 and 666 output a low and high voltage level, respectively.

Alternate Embodiment: A Preamplifier and Integrating Sense Amplifier

In Fig. 15, in another alternate embodiment of an integrating receiver, a sense amplifier 680 performs the integration function by incorporating capacitive elements 436 and 438. In this embodiment, the preamplifier 332A is coupled to a sense amplifier 680 rather than the integrator stage described above with reference to Fig. 7. The sense amplifier 680 is a modified version of the sense amplifiers 600A and 600B of Figs. 14A and 14B, respectively. The A and B nodes of the sense amplifier 680 receive the preamplifier outputs V_{PDATA} 346-1 and V_{PDATA_B} 346-2 via pass transistors 682-1 and 682-2, respectively. The sense amplifier 680 receives the preamplifier output V_{NDATA} 348-1 on node C and V_{NDATA_B} 348-2 on node D via pass transistors 684-1 and 684-2, respectively.

In the sense amplifier 680, capacitive elements 436, 438 are connected between nodes A and C, and B and D, respectively. The capacitive elements 436, 438 are implemented as described with respect to the integrator of Fig. 12. In an alternate embodiment, other known capacitive devices may be used as the capacitive elements 436, 438.

Although not shown, the precharge circuit of Fig. 12 is connected to nodes A, B, C and D.

The pass transistors 682, 684 now perform a switching function and act as a current source to charge or discharge the capacitive elements 436, 438. The pass transistors 682, 684 are active during the integration interval when the precharge signal is low. An inverter 692 receives the precharge signal and drives the gates of the NMOS pass transistors 684. The inverter 692 is connected to a predetermined voltage V_{GSATN} , rather than the supply voltage, which causes the inverter 692 to output a logical one equal to the voltage V_{GSATN} . The voltage V_{GSATN} is selected such that the pass transistors 684 will operate in saturation when active. Therefore, the current flowing through the respective capacitive element 436, 438 is substantially independent of the drain to source voltage across the pass transistors 684.

The pass transistors 682 are active during the integration interval when the precharge_B signal is high. Another inverter 694 receives the precharge_B signal and drives the gates of the PMOS pass transistors 682. The inverter 694 is connected to a predetermined voltage V_{GSATP} , rather than ground or V_{ss} , which causes the inverter 694 to output a logical zero equal to the voltage V_{GSATP} . The voltage V_{GSATP} is selected such that the pass transistors 682 will operate in saturation when active and therefore the current flowing through the respective capacitive element 436, 438 is substantially independent of the drain to source voltage across the pass transistors 682.

At the end of the integration phase, the activation of the precharge signal deactivates the pass transistors 682, 684. The nodes A, B, C and D store the integration voltages V_A , V_B , V_C and V_D , respectively.

The sense amplifier 680 includes a PMOS transistor 696 that couples the differential input PMOS pair 612 and 614 to the supply voltage when the sense_B signal is low. The remaining components of the sense amplifier transistors 632, 612, 614, 620, 622, 634 and 636 and output voltages V_s and V_{s_B} are the same as described with respect to Fig. 14.

Because no separate integrator circuit is used, this embodiment of an integrating receiver uses fewer components which reduces power and die area. Because fewer components are used, this integrating receiver has fewer parasitic capacitive elements. Therefore, the input voltage swing to the sense amplifier for a given integration current I is larger.

System Issues

As shown in Fig. 16, another problem in integrating receiver systems is that the data at or near the edges of a nominal data window may be unreliable. The ideal data window 720 extends for one phase of the system clock 364. To avoid supplying the integrator with unreliable data, the integration window is narrowed to avoid the boundary areas 722 of unstable or changing data due to system clock jitter and skew. The boundary areas 722 are

referred to as anti-data regions 722. The narrowed integration window is referred to as the “reliable data window” 724. The timing of the precharge and sense signals, 352 and 358, respectively, defines the ideal data window 720 and the reliable data window 724. To generate the reliable data window, the timing diagram of Fig. 8 is modified. The Release of Precharge event of the integrator is delayed from the ideal position 380 to the reliable position 728 and the Activation of Sense event is advanced in time from the ideal position 382 to the reliable position 732, thereby avoiding the anti-data regions.

In Fig. 17A, in an alternate embodiment, the “reliable data window” 724 is re-defined to avoid the anti-data regions. In this alternate embodiment, the reliable data window 724 is defined by the precharge signal 352 and the sense signal 358. The precharge signal is delayed by a predetermined amount δ with respect to the leading edge of the system clock 364. The sense signal is not delayed and becomes active at the trailing edge of the system clock 364.

Fig. 17B is an embodiment of a circuit that implements the timing diagram of Fig. 17A. The system clock 364 is supplied to a timing generation circuit 736 which generates the precharge and sense signals, 352 and 358, respectively, that are synchronized to the system clock 364 as shown in the timing for the ideal data window of Fig. 16. To implement the timing of Fig. 17A, a delay element 738 delays the precharge signal by the predetermined amount δ and provides a delayed-precharge signal 740 to the integrating receiver. The delay element 738 may be a delay line. Alternately, the delay element 738 may be the adjustable delay element of Fig. 22, discussed below. The sense signal is not delayed. To receive data during both phases (even and odd) of the system clock, the clock generator 736 supplies separate precharge and sense signals for the even data and the odd data. The precharge signals for the even and odd data each have their own delay element 738. Phase splitters 740 supply each signal and its complement simultaneously without substantial variation, if any, in phase.

In Fig. 17C, in another embodiment of the present invention, a timing diagram of another implementation of the sense and precharge signals, 358 and 352, respectively, is shown. The

sense signal 352 is the system clock, and the precharge signal 352 is delayed with respect to the sense signal 352.

In Fig. 17D, a circuit implements the timing diagram of Fig. 17C. The sense signal 358 is supplied to a delay element 738 to generate the precharge signal 352. The delay element 738 may be a delay line. Alternately, the delay element 738 may be the adjustable delay element of Fig. 22, discussed below. Both the sense signal, 358 and the precharge signal 352 are supplied to phase splitters 740 to generate both the true and complementary signals. In addition, for example, the phase splitter 740-5 generates the precharge-odd signal which is also used as the complementary precharge_b-even signal. Similarly, the phase splitter 740-5 generates the precharge-even signal which is also used as the complementary precharge_b-odd signal. This circuit of Fig. 17D eliminates the clock generator 736, a delay element 736-2, and two phase splitters 740-2 and 740-4 from the circuit of Fig. 17B.

In Fig. 18, an exemplary device 742 has a multiple receiver system. The multiple receiver system includes a system clock 364 and multiple integrating receivers 750 of the present invention. Each receiver 750 receives a data bit (Data<1> to Data<n>) as described above. A clock recovery circuit 751 generates the system clock 364 which is distributed to the receivers 750. However, the data bit supplied to each receiver 760 may be out of phase or skewed with respect to the system clock 364. The receivers 750 experience skew between the system clock 364 and data bits because of, at least in part, clock wiring delays or data wiring delays. As clock frequencies increase and bit-times are reduced, the skew between the system clock and the data bits becomes an increasingly significant part of the overall system timing budget.

In particular, because of delay 752 in the distribution of the system clock 364, each receiver 750 receives a system clock signal that is slightly out-of-phase or skewed with respect to the system clock signal at the clock recovery block and with respect to the system clock signals at other receivers 750. The data bits may also be skewed among themselves because of differences in board or package routing. The result is that the phase relationship or alignment of the system clock to the data is different at each receiver 770.

Referring also to Fig. 19, a timing diagram shows the timing of when the data is valid for data bit one (Data<1>) and data bit n (Data<n>), and the system clock at the respective receiver 750. The signal “clock-at-1” shows the system clock at receiver one 750-1, and the signal “clock-at-n” shows the system clock at receiver n 750-n. The signals “clock-at-1” and “clock-at-n” are out of phase with respect to each other.

5

In Fig. 20, to compensate for the skew between the system clock and the data bits in a device, the timing for each receiver, referred to as per-pin-timing, is adjusted by controlling the precharge and sense signals. Both the timing adjustment for integration windowing and the timing adjustment for per-pin timing calibration are performed with the same circuitry, thus reducing both “anti-data” and clock skew effects.

10

The adjustment system 770 aligns the system clock of each receiver 750 to the data at that receiver by adjusting the timing of the precharge signal 352 and sense signal 358. The receiver 750 can be any of the receivers described above. The adjustment circuit 770 has one global section 790 and multiple per-receiver sections 792. Each receiver 750 connects to a distinct instance of per-receiver section 792. Each per-receiver section 792 independently adjusts the precise timing of the Release of Precharge and Activation of Sense events for its associated receiver 750. The global section 790 includes Global Timing Control logic 794 and a Global Clock Generation block 796. The per-receiver section 792 includes Per-Pin timing Control logic 798, a Receiver Clock Generation block 802, and two adjustable delay blocks, one for the Precharge signal 804 and one for the Sense signal 806. The Global Timing Control Logic 794 generates control signals 808 that are supplied to the Per-Pin Timing Control Logic 798 and to the Global Clock Generation block 796, respectively. The Global Clock Generation block 796 includes a multiplexor 810 that has zero (0) degree and ninety (90) degree clock inputs, and a phase select input receiving the phase select signal 812 from the Global Timing Control Logic 794. The multiplexor 810 supplies the selected clock to the Receiver Clock Generation block 802. The Per-Pin Timing Control logic 798 and the Receiver Clock Generation Block 802 are coupled to the adjustable delay elements 804 and 806 to provide the specified Precharge and Sense signals for the receiver 750-1. The receiver 750-1 receives the input signals V_{IN} and V_{IN_B} . The Receiver Clock Generation Block 796

15

20

25

30

generates and supplies the ideal Precharge and Sense signals (see Fig. 8) to the delay elements 804, 806. The Per-Pin Timing Control Logic 798 connects to the select inputs (+ and -) of the adjustable delay elements 804, 806 to precisely adjust the delay the precharge and sense signals. The Per-Pin Timing Control Logic 798 also connects to the output V_{OUT} of the receiver 750-1 to monitor the output signal V_{OUT} to the with respect to the system clock to change the selected amount of delay, if needed. The connections of the Per-Pin Timing Control Logic 798 create a delay-locked loop for the integrating receiver 750-1.

In this way, the circuit of Fig. 20 provides per-pin-timing to compensate for the skew between the system clock and the data bits in a device.

Referring to Figs. 20, 21 and 12, the timing of the adjustment system will be described. This description uses the integrator of Fig. 12; however, the adjustment system works with any of the integrators described above. The system clock 364 is shown with the release of precharge event 380 and the activation of sense event 382. The input signal V_{IN} 342 is a stream of alternating zeroes and ones, and the complementary input signal V_{IN_B} is a stream of alternating ones and zeroes. The voltage of an exemplary integration node V_A 814 corresponding to the system clock 364 and input signal V_{IN} 342 is also shown.

To select the appropriate amount of delay from the delay elements 804, 806, the Global Timing Control Logic 794 first selects the ninety degree clock signal 816 by activating the appropriate Phase Select input 812 of the multiplexor 810 in the Global Clock Generation Block 796. This causes the Receiver Clock Generation Block 802 to shift the nominal Release of Precharge 380 and Activation of Sense 382 events by ninety degrees placing the Release of Precharge in the nominal center 818 of the ideal data window and the Activation of Sense in the nominal center 820 of the next ideal data window. While receiving the input signal of a stream of alternating zeroes and ones, the integrating receiver starts the integration phase when the precharge signal is released in the center 818 of the data window, and the voltage V_A on the integration node will be as shown in waveform 822. When the activation of sense event occurs in the center 820 of the next data window, the output voltage V_A of the integrator will be zero. In practice, the output of the sense amplifier output is equal to one for

approximately the same number of integration cycles as it is equal to zero. Therefore, the receiver functions as a phase detector when the timing loop is activated and the system clock is shifted by ninety degrees. When the system clock is shifted ninety degrees and the output V_A of the integrator is equal to zero, the Per-Pin Timing Control Logic 798 has adjusted the delay elements 804 and 806 properly for the particular receiver 750-1. Once each Per-Pin Timing Control Logic block 798 has adjusted the timing for its associated receiver 750-1, the Global Timing Control Logic 794 causes the multiplexor 810 to output the zero degree clock to the Receiver Clock Generation Block 802 so that the receiver system can receive and output data.

In summary, the amount of delay from the delay elements 806, 808, is adjusted for each receiver by using a data input stream of alternating ones and zeroes and shifting the system clock by ninety degrees to operate the receiver as a phase detector to place the center of the ninety degree clock in the center of the integration or reliable data window. In this way, when the global clock generation block supplies the zero degree or unshifted system clock, at least one edge of the zero degree system clock will be aligned with the center of the reliable data window.

In Fig. 22, an exemplary adjustable delay element 804 is shown. Delay element 806 is the same as delay element 804, and therefore only delay element 804 will be described. A binary-weighted set 830 of PMOS transistors 832, 834 is coupled between the supply voltage and the output signal line 836. The binary-weighted group 830 of transistors receives an input clock 838 and a set of enable signals $EnbP<0:3>$ 840. Respective pairs of PMOS transistors 832 and 834 are connected in series between the supply voltage and the output signal line 836. Transistors 832 receives the input signal 838 on their gates. Transistors 834 receive a respective one of the enable signals $EnbP<0:3>$ 840 on their gates. When both transistors in a series-connected pair are active, the input signal is delayed by an amount proportional to the binary weighting of the transistors.

The binary weight of each PMOS transistor is indicated next to each transistor. Transistor pair 832-1, 834-1 has a weight of one, transistor pair 832-2, 834-2 has a weight of two, pair

832-3, 834-3 has a weight of four and pair 832-4, 834-4 has a weight of eight. The weights are established by the width to length (W/L) ratio for each transistor. The W/L ratio determines the resistance of the respective transistor, increasing the width W decreases the resistance, while decreasing the width increases the resistance. The resistance and therefore the W/L ratio determines the incremental amount of delay generated by a transistor when that transistor is active.

A set 850 of NMOS transistors 852 and 854 are connected in series between ground and the output signal line 836. The gates of transistors 854 receive a respective one of the enable signals $EnbN<0>$. The gates of transistors 852 receive the input signal 838. Respective pairs of transistors 852 and 854 are connected in series. The transistors 852, 854 of each pair have the same binary weighting as their corresponding PMOS series-connected pair. For example, pair 852-1, 854-1 has a weight of one, pair 852-2, 854-2 has a weight of two, pair 852-3, 854-3 has a weight of four and pair 852-4, 854-4 has a weight of eight.

When the input signal 838 is low, the transistors in the PMOS group 830 are enabled to drive the output signal high with a predefined resistance, and therefore a predefined time constant, in accordance with to the state of the enable signals $EnbP<0:3>$. When the input signal 838 is high, the transistors in the NMOS group 850 are enabled to drive the output signal low with a predefined resistance, and therefore a predefined time constant, in accordance with the state of the enable signals $EnbN<0:3>$. Driving the output signal high with a high resistance, relative to the other transistors, increases the delay between the input signal 838 and the output signal 836. Driving the output signal high with a low resistance decreases the delay between the input signal 838 and the output signal 836. The amount of delay in driving the output signal low is controlled by the resistance of the transistors of the NMOS group 850. In the embodiment of Fig. 22, sixteen different delay adjustments are available.

For example, the transistors 832, 834, 852, 854 can be sized so as to provide an incremental delay of 125 picoseconds (ps) for each increment in the value of $EnbN<0:3>$ and $EnbP<0:3>$. In a alternate embodiment, binary stages 860 may be added to provide greater precision

and/or a greater range of delay values. In other alternate embodiments, the delay circuit 804 can be constructed to provide any particular predefined delay.

In Fig. 23A, in an alternate embodiment, an adjustment circuit adjusts the timing of the precharge and sense signals for a set of pins that receive incoming signals. For simplicity, an exemplary incoming signal will be referred to as a data signal. In this embodiment, the adjustment circuit adjusts the timing of the precharge and sense signals based on the timing relationship of a transition of a receive clock and a transition of the data signal. Odd and even data bits are received during complementary odd and even phases of the receive clock. The receive clock may be the system clock. An odd timing detector 560-1 provides timing signals $V_{\phi\text{-ODD}}$ for the odd phase, and an even timing detector 560-2 provides timing signals $V_{\phi\text{-EVEN}}$ for the even phase. Because the odd and even timing detectors 560 operate in the same way, only the odd timing detector 560-1 will be described. A preamplifier 332, such as the preamplifier 332A of Fig. 10, receives the input signal V_{IN} 342. An inverter 861 provides the complementary input signal $V_{\text{IN_B}}$ 344 to the preamplifier 332A. A ϕ -Sense amplifier 862 receives the preamplifier outputs in response to the receive clock and provides a $V_{\phi\text{-ODD}}$ signal. The ϕ -Sense amplifier 862 and a data sense amplifier 864 are implemented using the sense amplifier circuit 600 of Fig. 14.

Referring also to Fig. 23B, the $V_{\phi\text{-ODD}}$ signal represents the sampled state of the data signal at the positive edge transition of the receive clock. Meanwhile, the integrator 334 generates integration voltages based on the output of the preamplifier 332A, and the Data-sense amplifier 864 samples the state of the integration voltages at the trailing edge of the receive clock and provides a sampled data signal $V_{\text{S-ODD}}$.

The data transition and timing adjustment logic 866 receives the $V_{\phi\text{-ODD}}$, $V_{\text{S-ODD}}$ signals from the sense amplifiers 862, 864, respectively, and outputs selection signals that select the amount of delay from the delay adjustment blocks 868. The respective delay adjustment block 868 delays the precharge and sense signals, 352 and 358, respectively, in accordance with the selected amount of delay. The delay adjustment blocks 868 may be implemented using the circuit of Fig. 22.

The data transition and timing adjustment logic 866 selects an amount of delay based on the timing relationship between the input signal V_{IN} and the receive clock. In this embodiment, the ϕ -Sense amplifier 862 acts as a phase detector because its metastability point is inherently 90° from the integrator.

- 5 For example, if the transition of the input signal V_{IN} is early with respect to the falling edge of the receive clock, then the ϕ -Sense amplifier 862 will detect the transition of the data signal V_{IN} , but the integrator 334 and data sense amplifier 864 may not detect the transition of the input data signal V_{IN} because the integration time will be shorter. Alternately, if the transition of the input signal V_{IN} is late with respect to the falling edge of the receive clock,
- 10 then the ϕ -Sense amplifier 862 will not detect the transition of the data signal V_{IN} , but the integrator 334 and data sense amplifier 864 may not detect the transition of the input data signal V_{IN} because the integration time will also be shorter.

The data transition and timing adjustment logic 866 compares the signal output by the ϕ -Sense amplifier 862 to the receive clock using, for example, an exclusive-or gate. When the transition of the input signal V_{IN} is late with respect to the negative edge the receive clock, the ϕ -Sense amplifier 862 will not detect the transition of the input signal V_{IN} , although the data-sense amplifier 864 may detect the transition of the input signal V_{IN} . By observing and comparing the results of V_ϕ and V_s , the transition and timing logic block can determine

15 whether a data transition occurred, and when occurred, whether the data transition was early or late.

20

Multi-Phased Receivers

25 Performance can be increased by operating the receivers in multiple phases. To achieve data cycle rates in the gigabit range, multiple parallel receivers increase the speed of the data bus by reducing the time to transmit a data bit, the "bit time," without changing process or technology.

30

In Fig. 24, in a multi-phased receiver system 870, four receivers 780 of the present invention are connected in parallel and operated concurrently in multiple phases using four sets of timing signals $\phi 1$, $\phi 2$, $\phi 3$ and $\phi 4$. Referring also to Fig. 25, the operation of the multi-phased receiver system 870 of Fig. 24 will now be described. Data bits are received from a signal line of a bus as shown in timeline 880. Each data bit D_i is supplied to the bus for a bit time or data cycle. A pair of timelines 882 is shown for each receiver 780. The pair of timelines 882 represents the timing signals ϕ_i that control the receiver 780. The pair of timelines 882 includes an integration timeline 884 and sensing timeline 886. For example, the integration timeline 884-1 has integration intervals, I1 372 for data bit one and I5 for data bit five; and integration precharge intervals IP1 374 for data bit one and IP5 for data bit five. Generally, the Integration interval I_i is the time that the receiver 780 operates in the integration phase for the data cycle of the associated data bit D_i . The sensing timeline 886-1 is divided into sensing intervals S1 376 for data bit one, and S5 for data bit five, and sensing precharge intervals SP1 378 for data bit one, and SP5 for data bit five. For example, for data bit one D_1 , the timing signals defining $\phi 1$ extend from the start of the integration interval I1 to the end of the sense amplifier precharge interval SP1. The integration and sensing timing was described above with respect to Fig. 8. Each receiver 780-2, 780-3, 780-4 has the same timing except that the timing for each respective data bit is phase shifted.

Two clock signals, clock 1 and clock 2, define the boundaries of the data cycles. The clock signal clock 2 is phase shifted by ninety degrees with respect to clock 1. In an alternate embodiment, a single high speed clock that operates at twice the frequency of clock 1 defines the boundaries of the data cycles.

For example, at the beginning of the first data cycle for data bit one D_1 , the integration phase for receiver 1 780-1 begins. Near or at the end of the first data cycle for data bit one D_1 , the sensing operation begins. The sensing operation stores the accumulated voltage from the integration phase and converts the output of the integrator to a logic signal, having predetermined high and low voltage levels. The logic signal that represents data bit one from the first data cycle is available at the end of the sensing interval S1. After the integration phase, receiver one 780-1 enters the precharge phase IP1. After the sense amplifier and latch

convert the output of the integrator and store the state of the logic signal, respectively, the sense amplifier begins the sensing precharge phase SP1. Since the integration precharge phase IP1 ends in the data cycle for data bit four D4, receiver 1 780-1 is available to receive a new data bit at the data cycle for data bit five D5. Since receiver 1 780-1, and the other receivers, can not receive a new data bit for the three data cycles following the data cycle associated with the data bit being received, four receivers are used. In this way, very high data cycle rates, on the order of at least one gigabit per second, are achieved.

An Equalizer To Compensate For Intersymbol Interference

10

In high-speed signaling applications, the communications medium may cause problems such as intersymbol interference. The integration nodes of the integrator are used to correct for intersymbol interference using an equalization circuit and an accumulated voltage offset cancellation circuit. To compensate for the intersymbol interference, a filter can be used either at the driver or the receiver. The integrator itself is a form of filter (a matched filter) and with some adjustments can incorporate a form of equalization to substantially counter the intersymbol interference.

15

In Fig. 26A, an equalization circuit 900 compensates for intersymbol interference by applying a portion of the charge accumulated for the previous data bit to the new data bit by adjusting the amount of precharge on the integration nodes during the precharge cycle. The even and odd receivers 780 receive data bits from two adjacent data cycles such as an even and an odd cycle. The even receiver 780-even receives data on one phase of the clock, and the odd receiver 780-odd receives data on the other phase of the clock. The equalization circuit 900 is coupled between the outputs of the even and odd receivers.

20

25

The equalization circuit 900 compensates for intersymbol interference dynamically as data bits are received by applying a portion of the integration voltage generated at an integration node of a previously received bit to precharge the integration nodes for the next bit. The equalization circuit 900 includes a first operational amplifier 902 connected in series with a

30

first NMOS transistor 904. The operational amplifier 902 is connected in a unity gain configuration with its positive input (+) connected one of the integration nodes (D) of the integrator 780-even. The first NMOS transistor 904 is connected between the output of the operational amplifier 902 and an integration node (C) of an adjacent receiver 780-odd. The gate of the first NMOS transistor 904 is controlled by the output of an inverter 906 which receives the complement of the Precharge signal, Precharge_B, and receives power from an Equalization Ratio Control Voltage 908. The equalization ratio control voltage 908 determines the amount of charge supplied to the integration node during the precharge cycle by controlling the resistance of the first NMOS transistor 904 when the Precharge signal is active. The equalization circuit 900 also couples the C output of the even integrator 780-even to the D output of the odd integrator 780-odd using a second operational amplifier 912 and a second NMOS transistor 914.

The A and B nodes of the odd and even integrators are connected in the same manner as the C and D nodes, but are not shown for simplicity. Furthermore, identical operational amplifier circuits (not shown) are provided for transferring charge from the odd integrator outputs A-odd through D-odd to the even outputs A-even through D-even.

Referring to Fig. 26B, the precharge transistors of the precharge circuit 470 of the integrator in combination with equalization circuitry form a voltage divider 920, as shown in Fig. 26C, in which R1 is the equivalent resistance of the precharge transistor 474 and R2 is the variable resistance of transistor 904. During the precharge phase of the odd receiver 780-odd, the voltage on the integration nodes of the integrators in the odd receiver is precharged using $V_{\text{Precharge}}$ which is based on the voltage accumulated during the integration phase of the even receiver.

The equalization ratio control voltage 908 determines the amount of charge supplied during the precharge cycle. The equalization ratio control voltage 908 may be loaded into a register and supplied as an analog voltage by a digital-to-analog converter.

Input Voltage Offset Error Compensator

5 The input voltage offset error includes the voltage offsets inherent in the preamplifier, integrator, and sense amplifier. To compensate for the accumulated voltage offsets of the preamplifier, integrator and sense amplifier, an adjustment is made to the precharge voltage level of the integration nodes of the integrator in each receiver.

10 In Fig. 27A, a voltage offset cancellation circuit 930 includes an offset transistor, NMOS transistor 932, that connects in parallel with the operational amplifier 902 and transistor 904 of the equalizer circuit, described above, and ground. An offset control voltage 934 is supplied to the gate of the offset transistor 932 to adjust the voltage V_D at integration node D.

15 In Fig. 27B, a circuit diagram shows the equivalent resistance of the various components. Equivalent resistors R1 and R2 were described above with respect to Fig. 25C. The voltage offset cancellation circuit 930 corresponds to the equivalent variable resistor R3. Although the voltage offset cancellation circuit 930 was described with respect to a single integration node, preferably the same circuit 930 is applied to each integration node.

20 The offset control voltage 934 may be stored in a register and output by a digital-to-analog converter.

Adjusting the Timing of the System Clock Using an Integrating Receiver

25 In the embodiments that will now be discussed with reference to Figs. 28A, 28B, 28C and 28D, an integrating receiver is used as a phase detector in the clock recovery circuit 751 of Fig. 18.

Referring to Fig. 28A, when the system clock signal is integrated by the integrator (e.g., when the integrator is functioning as a phase detector in a delay-locked loop (DLL) or phase-locked loop (PLL), the accumulated output voltages between the integration nodes increase during a first phase of the system clock and decrease during the second phase of the system clock.

The period of the system clock t_{cycle} is defined as $2t$; and each phase of the system clock

5 extends for an interval t . At the end of the second phase of the system clock, the accumulated output voltage is equal to zero. The voltage increases and decreases at a rate equal to the integration current (i) divided by the capacitance (C). The maximum voltage between the output nodes occurs when the first phase transitions to the second phase and is equal to the integration current i divided by the capacitance C , multiplied by the time t , (i.e., $(i/C) \cdot t$).

10 In Fig. 28B, in one embodiment of the integrator 334 as a phase detector, static current sources 940 are added to the integrator 334 at nodes B and D by connecting to the capacitive elements 436, 438. When enabled, the static current sources 940 generate the same amount of current δ which is subtracted from the integration nodes. Each static current source 940 is

15 enabled separately with enable left and enable right signals. In an alternate embodiment, the static current sources increase the amount of current supplied to the integration nodes, such as integration nodes A and C. By adding or subtracting the current δ from the integration nodes, the system timing can be adjusted by fractions of the cycle time, independent of process, voltage and temperature.

20 In Fig. 28C, for example, a graph of the voltage between the integration nodes A and C is shown when static current is injected into the integration nodes. The integrator output voltage increases at a rate equal i/C and decreases at a rate equal to the integration current i plus the static current δ ($i + \delta$) divided by the capacitance (C), (i.e., $v=(i+\delta)/C$). At the end of

25 the system clock period $2t$, the integrated output voltage has a negative value. Therefore, the additional static current δ causes the zero crossing during the second phase of the system clock to occur earlier. The difference in the timing between this zero crossing and the end of the second phase of the system clock is referred to as τ . Since the clock recovery circuit of Fig. 18 adjusts the timing of the on-chip-system clock to match the zero crossings of the

30 accumulated voltage integration at the integration node, this difference in the timing or timing

offset τ is used to shift the phase of the system clock by a predetermined amount. The timing offset τ is defined by the following relationship:

$$\tau = (\delta / (i + \delta)) \cdot t_{\text{cycle}},$$

where t_{cycle} is the period of the system clock which is equal to $2t$.

5

Note that the timing offset τ is independent of process, voltage and temperature and is equal to the ratio of the added current to the total current. Therefore the timing offset τ provides a simple and inexpensive way to provide a phase offset.

10

The static current sources 940 are the same, and therefore only static current source 940-1 will be described. Two NMOS transistors 941 and 942 are connected in series between the integration node and ground. An enable signal causes the NMOS transistor 941 to become active and allow the static current δ to flow. Because transistor 942 is a current source, transistor 942 is connected to a bias voltage V_{BIAS} . The magnitude of the bias voltage is set by the desired offset current. Alternatively, the switched static current source 940-2 could be used to produce a negative timing offset, $-\tau$.

15

In Fig. 28D, an alternate embodiment provides a phase detector by connecting a delta-capacitor circuit 944 at the one of the capacitive elements of the integration node. The delta-capacitor circuit adjusts the capacitance of one side of the integrator, and therefore the output voltage will appear as in Fig. 28C. When the enable signal is high, the inverter 945 enables the delta-capacitive-element 946 to accumulate charge.

20

25

Multi-PAM

Referring back to Fig. 6, in the embodiments of the invention described thus far, signals transmitted on each signal line of the bus have either of two voltage levels representing a binary zero or one for binary digital communication. For example, an output voltage equal to the voltage level V_{TERM} set by the voltage source at one end of the termination resistor Z_0

30

may represent a binary zero, while an output voltage level equal to $V_{\text{TERM}} - (I \cdot Z_0)$ may represent a binary one, where the output driver circuit sinks an amount of current equal to I . In this way, the bus driver circuits can be implemented as switched current sources which sink current when driving binary one's onto the signal lines. When receiving data, the receiver circuits detect whether the voltage on the signal line is greater than or less than

5 $V_{\text{TERM}} - 0.5 (I \cdot Z_0)$ to determine whether the data is a binary zero or one, respectively. In one embodiment, data is transmitted and received on each edge of the system clock to achieve a data bit rate equal to twice the frequency of the system clock. In an alternate embodiment, data is transmitted once per clock cycle of the system clock.

10 Although the multi-PAM signaling of the present invention will be described with respect to a current mode bus, multi-PAM signaling can also be used in a voltage mode bus.

In various embodiments of the present invention, the data rate on the bus is increased without increasing either the system clock frequency or the number of signal lines. Output drivers

15 generate and receivers detect multi-pulse-amplitude-modulated (multi-PAM) signals that allow multiple (k) bits to be transmitted or received as one of 2^k possible voltages or data symbols at each clock edge. For example, in a 4-PAM system two bits are represented by 2^2 or four voltages or possible data symbols, and the two bits are transferred at every clock edge by transferring the appropriate one of the four voltages. Therefore, the data rate of a 4-PAM

20 system is twice that of a binary or 2-PAM system.

Multi-PAM is not traditionally used in multi-drop bus systems due to the lower signal-to-noise ratio in systems in which even the signal to noise ratio for binary signals is barely adequate. Prior art memory systems have been implemented as only binary systems. In

25 particular, in this invention, an integrating receiver is used in a multi-PAM system to increase the signal-to-noise ratio to an acceptable level.

In Fig. 29, a graph shows one embodiment of the 4-PAM signaling voltages. In one embodiment, the multi-PAM voltage levels are assigned consecutive binary values or

30 symbols such as 00, 01, 10 and 11, from the lowest voltage to the highest voltage. In the

embodiment of Fig. 29, the binary values are assigned to voltage levels using Gray coding. Gray coding reduces the probability of dual-bit errors because only one of the two bits changes at each transition between voltages levels. If a received 4-PAM voltage symbol is misinterpreted as an adjacent symbol, a single-bit error will occur.

5 The y-axis shows the associated 4-PAM output voltages V_{OUT} for each symbol. To provide the appropriate voltage to transmit a 4-PAM symbol, the output driver sinks a predetermined amount of current for that symbol. In particular, each symbol is associated with a different amount of current. To transmit a “00”, the output driver sinks no current and the signal line is pulled up to V_{TERM} . To transmit a “01”, the bus output driver sinks a predetermined
10 amount of current I_{01} to cause the output voltage V_{OUT} to equal $V_{TERM} - \frac{1}{3} (I \cdot Z_0)$, where I_{01} is equal to $\frac{1}{3}I$. To transmit a “11”, the bus output driver sinks a predetermined amount of current I_{11} to cause the output voltage V_{OUT} to equal $V_{TERM} - \frac{2}{3} (I \cdot Z_0)$, where I_{11} is equal to $\frac{2}{3}I$. To transmit a “10”, the bus output driver sinks a predetermined amount of current I to cause the output voltage V_{OUT} to equal $V_{TERM} - (I \cdot Z_0)$.

15 To improve noise immunity, the 4-PAM receiver identifies a received symbol based on a voltage range or range of voltages associated with that symbol. A set of reference voltages V_{REFL0} , V_{REFM} and V_{REFL1} function as thresholds to define ranges of voltages associated with each 4-PAM symbol. The reference voltages V_{REFL0} , V_{REFM} and V_{REFL1} are set at the
20 midpoint voltage between neighboring symbols. For example, the symbol “00” is associated with voltage range from V_{REFL0} to V_{TERM} . The symbol “10” is associated with a range of voltage from V_{REFL1} to $V_{TERM} - (I \cdot Z_0)$. The symbol “11” is associated with a range of voltage from V_{REFL1} to V_{REFM} . The symbol “01” is associated with a range of voltage from V_{REFM} to V_{REFL0} . The reference voltages V_{REFL0} , V_{REFM} and V_{REFL1} are threshold voltages at which a
25 multi-PAM data bit is determined to be one of an adjacent set of bits. For example, if the voltage of a received symbol is between V_{REFM} and V_{REFL0} , that bit is determined to represent “01.”

4-PAM symbols or signals also allow for direct compatibility with 2-PAM or binary
30 signaling. When operating in 4-PAM mode, the received data bits are compared to the three

reference voltages, V_{REFL0} , V_{REFM} and V_{REFL1} , to determine the 4-PAM symbol and the associated two bits. Since the most significant bit (MSB) is determined by comparing the received data bit to V_{REFM} , the multi-PAM system can be used as a 2-PAM system by ignoring the least significant bit (LSB) and using the MSB. To transmit 2-PAM symbols using the gray code of Fig. 29, the LSB is set equal to zero (low) while the MSB determines the output voltage.

Multi-PAM signaling increases the data rate with a small increase in power consumption because the number of input/output (I/O) pins and the system clock frequency is the same as that used for binary signaling. The major factor in the power consumption of CMOS circuits is the CV^2F power which depends directly on the system clock frequency. Therefore increasing the system clock frequency to increase the data rate directly increases the power consumption. Although some additional power is used for the additional circuitry of the multi-PAM interface, described below, this increase in power is much less than the increase in power that would occur if either the number of I/O pins or the system clock frequency were increased to increase the data rate.

Multi-PAM signaling also increases the data rate without a corresponding increase in the electro-magnetic interference (EMI). If the data rate were increased by increasing the number of I/O pins or by increasing frequency, the EMI would increase proportionally. Because multi-PAM signaling does not increase the number of I/O pins, the EMI does not increase if the total voltage amplitude of the multi-PAM I/O pins remains the same as that used in binary signaling. The total voltage amplitude may be increased to provide greater voltage margin to improve system reliability. Although the EMI would increase correspondingly, the increase would be smaller than that incurred by increasing the number of I/O pins with binary signaling.

The circuits described below use 4-PAM signaling, but can be expanded for use in 8-PAM, 16-PAM, and more generally, N-PAM signaling.

Multi-PAM Output Driver

In Fig. 30, a 4-PAM output driver circuit 950 is used with current control bits (CCtrl<6:0>) to produce desired output voltage levels over a set of on-chip process, voltage and temperature (PVT) conditions. In the output driver 950, a first driver circuit 952 and a second driver circuit 954 connects to an I/O pin 956. The first driver circuit 952 drives the LSB, while the second driver circuit 954 drives the MSB. The first driver circuit 952 and the second driver circuit have a set of driver blocks 958 that are connected in parallel. Since the driver blocks have the same components, one driver block 958 will be described. Each driver block has a binary weighted driver transistor 960-0 with a width to length (W/L) ratio as shown. The driver transistors 960 of the second driver circuit 954 are twice as large as the driver transistors of the first driver circuit 952 because the second driver circuit 954 drives the MSB while the first driver circuit 952 drives the LSB. In other words, the MSB is driven with twice as much current as the LSB.

In driver block 958, odd and even data bits are multiplexed onto the driver transistors 960 via passgates 962 and an inverter 964. Odd data is transmitted at the rising edge of the clock, while even data is transmitted at the falling edge of the clock. NAND gates 966, 968 connect to current control bit zero <0>, and the LSB Odd Data bit and the LSB even data bit, respectively. When the respective current control bit zero <0> is high, the NAND gates 966, 968 are responsive to the odd and even data. When the respective current control bit is low, the output of the NAND gates 966, 968 is low and the driver block 958 does not respond to the data bit. The current control bits provide the specified amount of current to cause the desired voltage swing regardless of the PVT conditions. The circuit of Fig. 28 uses seven current control bits. Techniques for determining the setting of the current control bits corresponding to the PVT conditions are not part of the present invention but part of the context in which this invention operates and will not be further described.

The passgates 962 include two transistor pairs, each pair including a PMOS transistor 972, 974 connected in parallel with an NMOS transistor 976, 978. The clock and clock_b signals connect in an opposite manner to the gates of the transistors of the transistor pairs.

Although Fig. 30 shows that the first driver circuit 952 drives the LSB and the second driver circuit drives the MSB 954, in an alternate embodiment, the first driver circuit 954 drives the MSB and the second driver circuit drives the LSB. Alternately, any arbitrary coding scheme can be produced by placing combinational logic to combine the data bits before sending the combined data bit to the driver block 958.

5

Table 1 below shows two 4-PAM encoding schemes that can be implemented using the output driver 950 of Fig. 28.

Table 1: Encoding Schemes

Coding Scheme	Data Bits (Symbol) to be Transmitted	MSB Input	LSB Input	Output Voltage
Binary	00	0	0	V_{TERM}
	01	0	1	$V_{TERM} - \frac{1}{3} (I \cdot Z_0)$
	10	1	0	$V_{TERM} - \frac{2}{3} (I \cdot Z_0)$
	11	1	1	$V_{TERM} - (I \cdot Z_0)$
Gray	00	0	0	V_{TERM}
	01	0	1	$V_{TERM} - \frac{1}{3} (I \cdot Z_0)$
	10	1	1	$V_{TERM} - (I \cdot Z_0)$
	11	1	0	$V_{TERM} - \frac{2}{3} (I \cdot Z_0)$

In another embodiment shown in Fig. 31, an 4-PAM output driver 980 uses current control bits to produce the specified amount of current resulting in the desired output voltage levels. Two sets 981-1 and 981-2 of binary weighted transistors 982-986 combine the current control bits with 4-PAM signal generation. The current control bits directly control current-control NMOS transistors 982-2, 984-2, 986-2 that are connected in series with the driver transistors 982-1, 984-1, 986-1, respectively, that receive the data. For odd data, the driver transistors 982-1, 984-1, 986-1, cause current to flow to the I/O pin 956 when the respective data bit and

10
15
20

the clock signal are high, and the associated current control bit is high to place NMOS transistors 982-2, 984-2 and 986-2 in the active state.

5 The circuit for even data is not shown, but a separate set of current control NMOS transistors connects in series with a set of driver transistors that respond to the logical “AND” of the respective data bit and the complement of the clock signal Clock_b for even data.

10 The output voltages of the circuits of Figs. 30 and 31 have gds distortion. In Fig. 32A, a graph shows gds distortion. The x-axis shows the drain-to-source voltage, and the y-axis shows the drain current. Fig. 32B shows the data bits, not in gray code, and the effect of gds distortion on the output voltage V_{OUT} . Fig. 32C shows the data bits in gray code, and the effect of gds distortion on the output voltage V_{OUT} . As the output voltage V_{OUT} decreases, the incremental voltage difference between adjacent bit pairs decreases. Because of gds distortion, the voltage increments between the 4-PAM voltages are not equal.

15 In Fig. 33A, a 4-PAM output driver 1000 corrects for gds distortion. For simplicity the current control bits are not shown. The gds distortion is eliminated by adjusting the width to length (W/L) ratio of transistors 1002, 1004, and 1006 by factors α and β such that $\beta > \alpha > 1$ and the incremental voltage difference between adjacent 4-PAM levels is constant. Transistors 1002, 1004 and 1006 have a width to length ratio of W/L, $\alpha(W/L)$ and $\beta(W/L)$,
20 respectively. For example, input signals A, B, and C are derived from the MSB and LSB of a signal to be transmitted to produce the 4-PAM levels as shown in Table 2 below. This output driver uses combinational logic 1007 to produce the A, B, and C inputs according to the data bits to be transmitted.

Table 2: Mapping of Data Bits to ABC Inputs and Encoding Schemes

Coding Scheme	Data Bits (Symbol) to be Transmitted	A	B	C	Output Voltage
Binary	00	0	0	0	V_{TERM}
	01	1	0	0	$V_{TERM} - \frac{1}{3} (I \cdot Z_0)$
	10	1	1	0	$V_{TERM} - \frac{2}{3} (I \cdot Z_0)$
	11	1	1	1	$V_{TERM} - (I \cdot Z_0)$
Gray	00	0	0	0	V_{TERM}
	01	1	0	0	$V_{TERM} - \frac{1}{3} (I \cdot Z_0)$
	10	1	1	1	$V_{TERM} - (I \cdot Z_0)$
	11	1	1	0	$V_{TERM} - \frac{2}{3} (I \cdot Z_0)$

In the combinational logic 1007, an OR gate 1008 generates the A signal by performing an OR operation between the LSB and MSB. The B input is the MSB. An AND gate 1009 generates the C signal by performing an AND operation between the LSB and MSB.

In Fig. 33B, the combinational logic 1007 encodes the LSB and MSB using gray code. The combinational logic circuit 1007 of Fig. 33B is the same as the combinational logic circuit 1007 of Fig. 33A except that, to generate the C signal, the AND gate 1009a receives the complement of the LSB rather than the LSB.

On-chip, single-ended output drivers, as shown in Figs. 30, 31 and 32, generate switching noise. For example, when the transistors in the output driver transition from sinking no current such as when driving the “00” symbol, to sinking maximum current such as when driving the gray-coded “10” symbol, the current surges through the I/O pin 956 and through a ground pin. The path between I/O pin 956 and ground has inherent inductance which opposes the current surge and produces significant switching noise (i.e., ground bounce).

Because the voltage margins for multi-PAM signaling are less than the voltage margins for binary signaling, switching noise may cause errors.

To reduce sensitivity to switching noise, output drivers can provide a constant or semi-constant current to ground regardless of the output current being driven. As shown in Fig. 34, each single-ended transistor branch 960 (Fig. 30) and 986 (Fig. 31) in the output drivers of Figs. 30 and 31 is replaced with a differential pair 1010.

When the output driver sinks output current from the I/O pin 956, current is steered through transistor N1 1012 to ground. When transistor N1 1012 is inactive, transistor N2 1014 becomes active to allow the same or substantially the same amount of current to flow to ground. In this way, a substantially constant amount of current continuously flows to ground to eliminate a large portion of the output driver switching noise and provide a quieter on-chip ground, thereby improving the performance of the 4-PAM signaling. The signal V_R that controls transistor N2 1014, is the complement of the signal V_i , the signal that drives transistor N1 1012. Alternately the signal V_R that drives transistor N2 1014 is a reference voltage between ground and V_i . In response to an input voltage V_{Ctrl} , the current source 1016 sinks a predetermined amount of current I_o to ground.

Fig. 35 is another embodiment of a multi-PAM output driver which combines the circuit of Fig. 33A, which eliminates gds distortion, with the circuit of Fig. 34 to reduce sensitivity to switching noise.

In Fig. 36, yet another gds compensated 4-PAM output driver is shown. In the 4-PAM output driver, the A, B, and C signals drive equal-sized NMOS transistors 1018, 1020, 1022 having width W . In the present invention, signals B and C also drive NMOS transistors 1024, 1026 of width W_B and W_C , respectively, to compensate for gds distortion. The widths of the NMOS transistors 1024 and 1026, W_B and W_C , respectively, are chosen such that the difference between output levels for adjacent bits is substantially the same, such as $\frac{1}{3}(I \cdot Z_0)$. The widths of the transistors 1018-1026 have the following relationship:

$$W_B < W_C \ll W.$$

In Fig. 37A, a 4-PAM output driver corrects for gds distortion and provides current control. As described above, the signals A, B and C determine the output voltage or symbol in accordance with the gray-coded binary signaling shown in Table 2, above. In addition, three sets of current control calibration bits, CC, CCB and CCC, respectively, determine the amount of current supplied by the output driver for various combinations of A, B and C. The first set of control bits CC provides primary current control, while the second and third sets of current control bits, CCB and CCC, respectively, fine tune the amount of current. The first set of current control bits CC has N bits; the second set of current control bits CCB has n1 bits; and the third set of current control bits CCC has n2 bits. In one embodiment, the relationship between the number of current control bits is as follows:

$$n1 \leq n2 < N.$$

There may be different relationships between N, n1 and n2 in alternative embodiments.

Each of the A, B and C signals is associated with a current drive block 1040 to drive a predetermined amount of current associated with the symbol. Each current drive block 1040 includes one or more sets of stacked transistor pairs 1042 that are associated with each set of current control bits for that current drive block 1040. For example, the current drive block 1040-1 that drives the A signal receives current control bits CC. The current drive block 1040-2 that drives the B signal receives current control bits CC and CCB. The amount of current supplied by current drive block 1040-2 is adjusted for gds distortion using the CCB bits. The current drive block 1040-3 that drives the C signal receives current control bits CC and CCC. The amount of current supplied by current drive block 1040-3 is adjusted for gds distortion using the CCC bits.

Referring also to Fig. 37B, a set of stacked transistor pairs 1042 is shown. Each stacked transistor pair 1042 includes two NMOS transistors 1046, 1048 connected in series. The

lower NMOS transistor 1046 connects to one of the A, B, or C signals associated with the current drive block 1040. The upper NMOS transistor 1048 connects to a current control bit. The lower NMOS transistor 1046 is preferably wider than the upper NMOS transistor 1048. Because there are N CC bits, there are N stacked transistor pairs. For example, the current control block 1040 has N stacked transistor pairs 1042-1 to 1042-N, and each stacked

5 transistor pair connects to one of the current control bits, CC<0> to CC<N-1>.

The transistors of the stacked transistor pairs are binary weighted with respect to a minimum width of W1 for the upper transistors, and W2 for the lower transistors. The widths W1 and W2 are chosen to determine output characteristics such as output resistance and capacitance.

10 Generally, the widths W1 and W2 are chosen such that W1 is less than W2.

The circuit diagram of Fig. 37B also applies to the sets of stacked transistor pairs associated with the CCB and CCC current control bits.

15 As shown in Fig. 38, a current control calibration circuit 1050 determines the settings for the current control bits CC, CCB and CCC by selecting a current control reference voltage VREF; and comparing the current control reference voltage VREF to a voltage at a mid-point between two calibration output voltages VOUT-1 and VOUT-2. The current control calibration circuit 1050 determines settings for each of the sets of current control bits CC, CCB and CCC for

20 each 4-PAM output voltage such that VOUT-1 and VOUT-2 provide each adjacent pair of voltage levels to the circuit.

A multiplexor 1052 receives the three 4-PAM reference voltages, VREFL0, VREFM and VREFL1. A select reference voltage signal, SelRef, selects one of the reference voltages as the selected

25 current control reference voltage VREF. A comparator 1054 compares the selected current control reference voltage VREF to a mid-point voltage Vx and generates a comparison signal.

To generate the mid-point voltage Vx, output driver 1 1056 sinks a first amount of current to provide the first output voltage VOUT-1 and output driver 2 1058 sinks a second amount of

30 current to provide the second output voltage VOUT-2. Two passgate pairs 1060, 1062, in

response to a current control enable and its complementary signal, act as a resistor divider to provide the midpoint voltage V_x between the first output voltage V_{OUT-1} and the second output voltage V_{OUT-2} .

A state machine 1064 includes first, second and third counters, 1066-1, 1066-2, and 1066-3, that provide the first, second and third sets of current control bits, CC, CCB, and CCC, respectively. If the comparison signal indicates that the midpoint signal V_x is greater than the reference voltage V_{REF} , the state machine 1064 increments an associated set of current control bits by one to increase the amount of current that is sunk by the output driver, thereby decreasing the midpoint voltage. If the midpoint signal V_x is less than the current control reference voltage V_{REF} , the state machine 1064 decrements the associated current control bits by one, thereby increasing the midpoint voltage.

In one embodiment, the current control bits are calibrated during a power-up sequence. The theory of operation for calibrating the current control bits is as follows. The first set of current control bits CC provide the primary amount of current control for each current control block 1040. To compensate for gds distortion, the CCB and CCC current control bits fine tune the amount of current associated with the Gray-coded “11” and “10” signals, respectively. The current control bits are calibrated in the following order: CC, CCB, then CCC.

In an alternate embodiment, the current control bits may be calibrated after power-up in response to triggering events, e.g., lapse of a period of time, or in response to a threshold number of errors.

Referring also to Fig. 32B, the first and main set of current control bits CC are set using the voltage difference between the “00” and “01” symbols. The first set of current control bits CC are set to provide an amount of current to provide the output voltage for the “01” symbol such that V_{REFLO} is placed at the midpoint between the output voltage for the “00” symbol and the output voltage for the “01” symbol. Because the difference in output voltage V_{out} is the greatest between the “00” and “01” symbols, the voltage difference between the “01” and

“11” symbols, as well as the “11” and “10” symbols will then be set equal to the voltage difference of the “00” and “01” symbols during system calibration.

As shown in Fig. 32B, because of gds distortion, without compensation, the voltage difference between the “01” symbol and the “11” symbol is less than the voltage difference between the “00” symbol and the “01” symbol. To compensate for the gds distortion, the output voltage for the “11” symbol is decreased by increasing the amount of current sunk by the output driver. The second set of current control bits CCB are set to increase the current sunk by the output driver such that the output voltage becomes equal to the desired voltage level when the midpoint voltage between output voltage for the “01” and “11” is equal to V_{REFM} .

Finally, the third set of current control bits CCC is adjusted to compensate for the gds distortion between the voltage associated with the “11” symbol and the voltage associated with the “10” symbol.

Referring to Figs. 38, 39A and 39B, the operation of the circuit 1050 including the state machine 1064 will be described. The flowchart of Fig. 39 uses gray coded output voltages. In step 1070, the current control enable signal (ccen) and its complement (ccenb) are set to activate the passgate pairs 1060 and 1062 and output the midpoint voltage V_x , described above.

Three major blocks of steps 1072, 1074 and 1076 set the current control bits, CC, CCB and CCC, respectively.

In block 1072, step 1078 sets the initial conditions for determining the settings for the first set of current control bits CC. The state machine 1064 outputs the select reference voltage signal (SelRef) which causes the multiplexor 1054 to output the reference voltage V_{REFL0} to the comparator 1054. A “00” symbol is supplied to output driver 1 1056 by outputting multi-PAM bit selection signals A1, B1 and C1 with values of zero. A “01” symbol is supplied to output driver 2 1058 by outputting multi-PAM bit selection signals A2 with a value of one,

and B2 and C2 with a value of zero. The initial state of the first, second and third current control bits is as follows:

$$\begin{aligned}CC &= \{1\ 0\ 0\ \dots\ 0\}; \\CCB &= \{1\ 0\ 0\ \dots\ 0\}; \text{ and} \\CCC &= \{1\ 0\ 0\ \dots\ 0\}.\end{aligned}$$

5

The current control bits are initially set such that the stacked transistor pair sinking the most current will be activated.

10 In step 1080, the output drivers 1 and 2 output the voltages corresponding to the symbols “00” and “01” and the midpoint voltage V_x is generated. In step 1082, the comparator 1054 compares the midpoint voltage V_x to the selected reference voltage V_{REFL0} . When the midpoint voltage is within one least significant bit of the reference voltage V_{REFL0} , the first set of current control bit have the proper setting. The state machine 1058 determines that the midpoint voltage V_x is within one least significant bit of the reference voltage V_{REFL0} when
15 the current control bits begin to oscillate between two settings. In other words, the output of the comparator will alternate between a zero and a one.

20 In step 1084, when the midpoint voltage V_x is not within one least significant bit of the reference voltage V_{REFL0} , the state machine 1064 augments the first set of current control bits depending on the result of the comparison. The term “augment” is used to indicate either incrementing or decrementing the current control bits. The process proceeds to step 1080.

25 If, in step 1082, the state machine 1064 determines that the midpoint voltage V_x is within one least significant bit of the reference voltage, the process proceeds to step 1086 to calibrate the second set of current control bits, CCB.

30 In step 1086, the initial conditions for calibrating the second set of current control bits CCB are set. The state machine 1064 outputs the select reference voltage signal (SelRef) which causes the multiplexor 1054 to output the reference voltage V_{REFM} to the comparator 1054. A “01” symbol is supplied to output driver 1 1056 by outputting multi-PAM bit selection

signals A1 with a value of one, and B1 and C1 with values of zero. A “11” symbol is supplied to output driver 2 1058 by outputting multi-PAM bit selection signals A2 and B2 with a value of one, and C2 with a value of zero. The state of the first set of current control signals CC remains unchanged. The initial state of the second and third sets of current control bits, CCB and CCC, respectively, is as follows:

$$\begin{aligned} \text{CCB} &= \{1\ 0\ 0\ \dots 0\}; \\ \text{CCC} &= \{1\ 0\ 0\ \dots 0\}. \end{aligned}$$

In step 1088, the output drivers 1 1056 and 2 1058 output the voltages corresponding to the symbols “01” and “11”, and the passgate pairs 1060, 1062 output the midpoint voltage V_x .

In step 1090, the comparator 1054 compares the midpoint voltage V_x to the selected reference voltage V_{REFM} . When the midpoint voltage is not within one least significant bit of the reference voltage V_{REFM} , as described above with respect to V_{REFL0} , in step 1092, the state machine 1064 augments the second set of current control bits CCB by one and the process repeats at step 1086.

When the midpoint voltage is within one least significant bit of the reference voltage V_{REFM} , as described above with respect to V_{REFL0} , the second set of current control bits CCB have the proper setting and the process proceed to step 1094 to calibrate the third set of current control bits, CCC.

In step 1094, the initial conditions for calibrating the third set of current control bits CCC are set. The state machine 1064 outputs the select reference voltage signal (SelRef) which causes the multiplexor 1054 to output the reference voltage V_{REFL1} to the comparator 1054. A “11” symbol is supplied to output driver 1 1056 by outputting multi-PAM bit selection signals A1 with a value of one, and B1 and C1 with values of zero. A “10” symbol is supplied to output driver 2 1058 by outputting multi-PAM bit selection signals A2 and B2 with a value of one, and C2 with a value of zero. The state of the first and second sets of current control signals CC and CCB, respectively, remains unchanged. The initial state of the third sets of current control bits CCC is as follows:

$$CCC = \{1\ 0\ 0\ \dots\ 0\}.$$

In step 1096, the output drivers 1 1056 and 2 1058 output the voltages corresponding to the symbols “11” and “10”, and the passgate pairs 1060, 1062 output the midpoint voltage V_x .

In step 1098, the comparator 1054 compares the midpoint voltage V_x to the selected

5 reference voltage V_{REFL1} . When the midpoint voltage is not within one least significant bit of the reference voltage V_{REFL1} , as described above with respect to V_{REFL0} , in step 1100, the state machine 1064 augments the third set of current control bits CCC by one and the process repeats at step 1094.

10 In step 1098, when the midpoint voltage is within one least significant bit of the reference voltage V_{REFL1} , the appropriate settings for the first, second and third sets of current control bits, CC, CCB and CCC, respectively, are determined and the calibration is complete.

15 Multi-PAM Receiver

In Fig. 40, a 4-PAM receiver 1110 has a most-significant bit (MSB) receiver block 1112 that receives the input voltage V_{in} and generates the most-significant bit of the 4-PAM signal for the even and odd phases of the system clock. The 4-PAM receiver 1110 also has a LSB

20 receiver block 1114 that receives the input voltage V_{in} and generates the least-significant bit of the 4-PAM signal for the even and odd phases of the system clock. A receiver timing circuit 1116 generates the precharge and sense signals for the even and odd phases of the system clock in accordance with the timing diagrams and circuitry discussed above. The receiver timing circuit 1116 receives the system clock and provides the precharge and sense

25 signals to the MSB receiver 1112 and LSB receiver 1114. A bias generator 1118 generates bias voltages used by the receiver timing circuit 1116, MSB receiver 1112, and the LSB receiver 1114.

In the MSB receiver 1112, the input voltage V_{IN} is compared to the reference voltage V_{REFM} to generate the MSB. In the LSB receiver 1114, the input voltage V_{IN} is compared to the V_{REFL0} and V_{REFL1} reference voltages to generate the LSB.

In Fig. 41, an embodiment of an MSB receiver 1112A and LSB receiver 1114A is shown in more detail. In this implementation, the MSB receiver 1112A compares the input voltage V_{IN} to the reference voltage V_{REFM} in the preamplifier 1120. The MSB preamplifier 1120 receives the input voltage V_{IN} and provides two pairs of differential output voltages V_{PDATA} and $V_{PDATA\overline{B}}$, and V_{NDATA} and $V_{NDATA\overline{B}}$, during each phase of the clock cycle for the even and odd MSB integrators 1121. The MSB preamplifier 1120 will be discussed in further detail below.

The MSB integrators 1121 output two pairs of differential integration voltages on nodes A, B, C, and D. In one implementation, the MSB integrators 1121 use the integrator of Fig. 11C. In another implementation, the MSB integrators 1121 use the integrator of Fig. 12. Each MSB integrator 1121 supplies the integration voltages to the corresponding (even or odd) MSB Sense Amplifier 1122. In one implementation, the MSB sense amplifiers 1122 use the sense amplifier of Fig. 14A. In an alternate implementation, the MSB sense amplifiers 1122 use the sense amplifier of Fig. 14B.

In the LSB receiver 1114A, the LSB preamplifier 1123 compares the input voltage V_{IN} to the reference voltages V_{REFL0} and V_{REFL1} prior to integration. The LSB preamplifier 1123 receives the input voltage V_{IN} and provides two pairs of differential output voltages V_{PDATA} and $V_{PDATA\overline{B}}$, and V_{NDATA} and $V_{NDATA\overline{B}}$, during each phase of the clock cycle for the even and odd LSB integrators 1124. The LSB integrators 1124 and LSB sense amplifiers 1125 are the same as the MSB integrators 1121 and MSB sense amplifiers 1122, respectively, described above.

In an alternate embodiment, the MSB and LSB integrators, 1121 and 1124, respectively, are not used, and the sense amplifier of Fig. 15 is used. In other words, a sense amplifier of Fig.

15, which performs the integration function within the sense amplifier, replaces each integrator - sense amplifier pair.

As shown in Fig. 42, in an alternate embodiment, the MSB preamplifier 1120 and LSB preamplifier 1123 of Fig. 41 are not used, and the integrators 1126, 1127 compare the input voltage V_{IN} to the reference voltages. The MSB reference voltage V_{REFM} is supplied to the MSB integrators 1126. The LSB reference voltages V_{REFL0} and V_{REFL1} are supplied directly to the LSB integrators 1127. The MSB and LSB sense amplifiers, 1128 and 1129, respectively, are the same as the MSB and LSB sense amplifiers of Fig. 41. In one implementation, the MSB integrators 1126 use the circuit of Fig. 11B. In an alternate implementation, the MSB integrators 1126 use the circuit of Fig. 11C.

Various embodiments of the LSB integrators 1127 will be discussed below. The LSB sense amplifiers 1129 are the same as the MSB sense amplifiers.

In Fig. 43, a multi-PAM receiver 1130 receives the multi-PAM symbols transmitted by the output driver. In particular, the 4-PAM receiver 1130 receives and decodes a 4-PAM input signal V_{IN} . In the MSB receiver 1112C, a latching comparator 1132 compares the value of the voltage of the received input signal V_{IN} to the reference voltage V_{REFM} and latches the value of the result of the comparison B in response to a receive clock signal. In the LSB receiver 1114C, two latching comparators 1134 and 1136 compare the value of the voltage of the received input signal V_{IN} to the reference voltages V_{REFL0} and V_{REFL1} , and latch the value of the result of the comparison A and C, respectively, in response to the receive clock signal.

The output B from the MSB receiver 1112C represents the MSB. To decode the LSB, the signals from the comparator outputs B, A, and C are then passed through combinational logic 1138. The combinational logic 1138 decodes Gray coded signals as shown in Table 2 above. The 4-PAM input receiver incurs additional clock-to-output latency because of the combinational logic 1138.

The timing of the receive clock signal is such that the latching comparators 1132-1136 sample the input data between 4-PAM signal transitions. Because data is sent on both edges of the receive clock, two receiver circuits 1130 are used - one for odd data, and one for even data.

5 Conventional latching comparators are susceptible to high frequency noise spikes which cause errors during latching, especially in multi-PAM systems. Implementing the latching comparators as integrating receivers, described above, reduces the sensitivity of the output signal to noise because the output signal depends on the integration of the voltage of the input signal V_{IN} over most or all of the bit cycle.

10 In CMOS, the integrator steers integration current according to the relative voltages on the inputs. The ideal saturating integrator does not integrate the difference between the input voltages, but integrates a predetermined amount of current for the time during which one input has a voltage exceeding the voltage on the other input. To improve the integration
15 process, a pre-amplifier conditions the input signals V_{IN} to provide a constant differential voltage with a polarity that depends on the relative polarity of the input signals. Therefore, the integrator integrates the integration current based on which of the two inputs has the higher voltage, not the actual voltage difference between the two inputs, e.g., integrating polarity over time, rather than amplitude over time.

20 A preamplifier can be implemented as a resistor-loaded differential pair which provides a differential voltage $\pm \Delta V$ equal to IR , at its outputs. The sense amplifier and latch, described above with respect to Fig. 14, operates with the multi-pam integrator, amplifies the result of the integration to the full CMOS voltage level representing a one or a zero, and
25 stores the full CMOS voltage level.

In Fig. 44, to reduce the input-to-output latency from the combinational logic 1138, a preamplifier 1150 combines the function of preamplifying the difference between the input voltage V_{IN} and the reference voltages with the function of decoding the 4-PAM input
30 voltages into the MSB and LSB. The preamplifier 1150 is used in the comparator circuit that

determines the LSB, while a simple resistor-loaded differential pair is used as the preamplifier in the circuit that determines the MSB. Using the preamplifier 1150, only two comparators of Fig. 43 are used to receive a data bit - one comparator for the MSB, the other comparator for the LSB. This circuit also reduces input-to-output latency, uses less chip-area and reduces power consumption.

5

To produce the LSB from the Gray-coded 4-PAM levels, when the input voltage V_{IN} is between that of V_{REFL0} and V_{REFL1} , the differential transistor pairs 1157-1 and 1157-2, provide an output voltage V_{LP} equal to the supply voltage V_{DD} . When the input voltage V_{IN} is not between that of V_{REFL0} and V_{REFL1} , the differential transistor pairs 1157-1 and 1157-2 provide an output voltage V_{LP} equal to the supply voltage V_{DD} minus the bias current i multiplied by the value of the pull-up resistor R . The output voltage V_{LP} is supplied to a comparator circuit or an integrating receiver. In an alternate embodiment, the resistor R is replaced with an active load such as a grounded-gate PMOS transistor. In another alternate embodiment, the preamplifier circuit is “flipped” by substituting PMOS current sources and PMOS differential pairs for the NMOS current sources and NMOS differential pairs.

10

15

To provide a differential output V_{LP} and V_{LP_B} , a matching PMOS current source 1156 is used. Table 3 below describes the output voltages as a function of the input voltage V_{IN} .

20

Table 3

V_{IN}	V_{LP}	V_{LP_B}
$V_{IN} > V_{REFL0} > V_{REFL1}$	$V_{DD} - i R$	V_{DD}
$V_{REFL0} > V_{IN} > V_{REFL1}$	V_{DD}	$V_{DD} - i R$
$V_{REFL0} > V_{REFL1} > V_{IN}$	$V_{DD} - i R$	V_{DD}

25

In Figs. 45A and 45B, the PMOS current source 1156 of Fig. 44 is eliminated. It is difficult to build a PMOS current source 1156 (Fig. 44) that matches the NMOS current sources 1158, 1160 (Fig. 44) exactly. In combination the NMOS and PMOS preamplifiers, 1170 and 1200,

respectively, provide two pairs of differential output voltages V_{NDATA} and V_{NDATA_B} and V_{PDATA} and V_{PDATA_B} for the LSB. Table 4 below describes the output voltages from the preamplifier circuits as a function of the input signal V_{IN} .

Table 4

	NMOS Preamplifier (Fig. 45A)		PMOS Preamplifier (Fig. 45B)	
V_{IN}	V_{NDATA}	V_{NDATA_B}	V_{PDATA}	V_{PDATA_B}
$V_{IN} > V_{REFL0} > V_{REFL1}$	$V_{DD} - i R$	$V_{DD} - 2iR$	$2iR$	$i R$
$V_{REFL0} > V_{IN} > V_{REFL1}$	$V_{DD} - 2iR$	$V_{DD} - i R$	$i R$	$2iR$
$V_{REFL0} > V_{REFL1} > V_{IN}$	$V_{DD} - i R$	$V_{DD} - 2iR$	$2iR$	$i R$

Fig. 45A shows an NMOS preamplifier 1170 for input signals V_{IN} having a common mode range close to the supply voltage. Two differential pairs 1172, 1174 and 1176, 1178 compare the input signal V_{IN} to two reference voltages, V_{REFL0} and V_{REFL1} , respectively. The reference voltages, signal levels and relative voltage levels were described above. Load transistors 1180, 1184, depicted as resistive loads, provide a path for current to flow through the transistors of the differential pairs from the supply voltage V_{DD} . The transistors of the first differential pair 1172, 1174 differentially receive the reference voltage V_{REFL0} and the input signal V_{IN} at their gates, respectively. The sources of the first differential pair 1172, 1174 are connected to a current source transistor 1175 which supplies current i in response to the bias voltage V_{BiasN} applied to their gates. The drains of the transistors 1172, 1174 of the first differential pair provide the output V_{OUT} , V_{OUT_B} . When the difference between the differential input voltage ($V_{IN} - V_{REFL0}$) is positive the differential output voltage ($V_{NDATA} - V_{NDATA_B}$) is positive.

The transistors of the second differential pair 1176, 1178 differentially receive the input signal V_{IN} and the reference voltage V_{REFL1} on their gates, respectively. The sources of the second differential pair 1176, 1178 connect to a current source transistor 1179 which supplies current i to the second differential pair in response to the bias voltage V_{BiasN} on the gate of

transistor 1192. Resistive loads 1180 and 1184 are connected between the supply voltage and the respective drains of the second differential transistor pair 1176, 1178. The drains of the second differential pair 1176, 1178 provide the differential outputs V_{NDATA} , V_{NDATA_B} . When the difference between the differential input voltages ($V_{IN} - V_{REFL1}$) is negative, the differential output ($V_{NDATA} - V_{NDATA_B}$) is positive.

5

To balance the total current swing, another current source transistor 1194 provides additional current to V_{NDATA_B} via transistor 1196. Transistor 1196 is added to simply improve the current matching to transistors 1175 and 1179.

10 The circuit of Fig. 45A implements a comparator function within the preamplifier to determine when the input signal V_{IN} is less than V_{REFL0} and greater than V_{REFL1} , (i.e., between V_{REFL0} and V_{REFL1}). When the input signal V_{IN} is within this range, transistors 1172 and 1176 are active and transistors 1174 and 1178 are inactive. Under these conditions, the current flowing through resistor 1180 I_a is equal to $2I$, and the current flowing through resistor 1182 I_b is equal to I . The differential output voltage ($V_{NDATA} - V_{NDATA_B}$) is equal to the negative of the product the current I multiplied by the resistance R (i.e., $-IR$). When the input voltage V_{IN} is outside of the range defined by V_{REFL0} and V_{REFL1} , either transistors 1172 and 1178 are active or transistors 1174 and 1176 are active, while the other transistors in the differential pairs are inactive. Under these conditions, the current I_a is equal to I , I_b is equal to $2I$, and the differential output voltage ($V_{NDATA} - V_{NDATA_B}$) is equal to the product of the current I and the resistance R (i.e., $+IR$).

In Fig. 45B, a preamplifier 1200 is used for input signals having a common mode range closer to ground. The circuit of Fig. 45B is a PMOS implementation of the circuit of Fig. 45A. A first differential pair 1202, 1204 receives the input voltage V_{IN} and the reference voltage V_{REFL0} on its gates and produces output voltages V_{PDATA} and V_{PDATA_B} on its drains. When the differential input ($V_{IN} - V_{REFL0}$) is positive, the sign of the difference of the differential output voltages ($V_{PDATA} - V_{PDATA_B}$) is positive. The first differential pair 1202, 1204 is supplied with current from current source transistor 1206. The current source transistor 1206 is biased by V_{BIASP} on its gate and is connected between the supply voltage

V_{DD} and the sources of transistors 1202, 1204. A pair of load resistors 1208 and 1210 having resistance R is connected between the drains of transistors 1202, 1204, respectively, and ground. A second differential pair 1212, 1214 receives the input voltage V_{IN} and the reference voltage V_{REFL1} on its gates and produces differential outputs V_{PDATA} and V_{PDATA_B} such that when the sign of the difference of the differential input voltages (V_{IN} - V_{REFL1}) is negative, the sign of the difference of the differential output voltages (V_{PDATA} - V_{PDATA_B}) is positive. Resistors 1216 and 1218 with resistance R are connected between the drains of the second differential pair 1212, 1214, respectively, and ground. A current source transistor 1220 is connected between the supply voltage V_{DD} and the sources of second differential pair 1212, 1214, and supplies current I. Another current source transistor 1222 supplies current I to V_{PDATA} via transistor 1224 which is biased in the active state by V_{REFL1}. Current source transistors 1206, 1220, and 1222 have their gates connected to bias voltage V_{BiasP}.

When the input signal V_{IN} is less than V_{REFL0} and greater than V_{REFL1} (i.e., the input signal is in a range between the two reference voltages), the current flowing through resistors 1208 and 1210, I_a is equal to I and I_b is equal to 2I, respectively, and the differential output voltage (V_{PDATA} - V_{PDATA_B}) is equal to the negative product of the current I and resistance R (-IR). When the input signal V_{IN} is outside of the range defined by the reference voltages V_{REFL0} and V_{REFL1}, the current I_a flowing through resistor 1108 is equal to 2I and the current I_b flowing through resistor 1210 is equal to I. The differential output voltage (V_{PDATA} - V_{PDATA_B}) is equal to the product of the current I and resistance R (+IR). The preamplifier 1200 performs a comparator and amplifier function similar to preamplifier 1170 of Fig. 45A. When the preamplifiers of Figs. 45A and 45B are both used, the preamplifiers provide a pair of differential voltage outputs, and each preamplifier operates at a different common mode voltage for use by the integrator.

In Fig. 46, a 4-PAM preamplifier for the MSB receives the input signal V_{IN}, compares the input signal to a predetermined voltage V_R, and provides two pairs of differential output voltages, V_{NDATA} and V_{NDATA_B}, and V_{PDATA} and V_{PDATA_B}, for the MSB. In one embodiment, the predetermined voltage V_R is equal to the complement of the input voltage V_{IN_B}. In an alternate embodiment, the predetermined voltage V_R is equal to V_{REFM}. A

PMOS preamplifier 1252 provides outputs V_{PDATA} and V_{PDATA_B} . An NMOS preamplifier 1254 provides outputs V_{NDATA} and V_{NDATA_B} . The PMOS and NMOS preamplifiers 1252 and 1254 operate in the same way as the PMOS and NMOS preamplifiers 1200 and 1170 of Fig. 45A and 45B, respectively, except that the predetermined voltage V_R is used, and the load resistors R are implemented with transistors.

5

In a receiver, the preamplifier 1250 of Fig. 46 can be used with the integrators of Figs. 11C and 12. In addition, the preamplifier 1250 can be used directly with the sense amplifier of Fig. 15.

10

A Multi-PAM Integrator

15

In Fig. 47, a LSB folded integrator 1330 combines the function of comparing the reference voltages with the integration process. In particular, the integrator 1330 is used to determine the LSB. The PAM input signal may be supplied directly to the integrator 1330 via the bus without going through the preamplifier. Alternately a multi-PAM preamplifier, discussed above, conditions the received 4-PAM input signal for subsequent integration.

20

To determine the MSB of the 4-PAM signal, the integrator of Figs. 11A, 11B or 13 can be used without change, or, alternately, by supplying the middle reference voltage V_{REFM} , discussed above, to the V_{IN_B} input.

25

The integrator 1330 receives a multi-level input signal V_{IN} and compares that signal against two voltage reference levels V_{REFL0} and V_{REFL1} to implement a comparator function in combination with the integrator function. The circuit of Fig. 47 is similar to the circuit of Fig. 11B except that two current-steering transistor pairs and two current sources are added. These additional current-steering pairs and current sources implement a window comparator to determine whether the multilevel input signal V_{IN} is within a predefined range of voltage levels. In combination with the second integrator that determines the MSB, each of the four conditions of V_{IN} , discussed above, is decoded.

30

Fig. 48 shows the various voltage reference levels V_{REFL0} , V_{REFM} and V_{REFL1} , the four states $V_{IN} < V_{REFL1}$, $V_{REFL1} < V_{IN} < V_{REFM}$, $V_{REFM} < V_{IN} < V_{REFL0}$ and $V_{IN} > V_{REFL0}$, and the two bits, the MSB and LSB, which are derived from comparing the input signal V_{IN} with these voltage levels of the four states. The integrator of Fig. 47 compares the input signal V_{IN} against the upper and lower reference voltages, V_{REFL0} and V_{REFL1} , respectively, to determine the least significant bit, LSB, for the four states. Another integrator compares V_{IN} to the middle voltage V_{REFM} to determine the most significant bit, MSB, for the four states. Any of the integrators described above may be modified to perform this comparison by supplying V_{IN} and the reference voltage V_{REFM} as the differential input signal.

Fig. 48 also shows the value of the current flowing i_A , i_B , i_C , and i_D through the integration nodes of the integrator of Fig. 47 for each state. When the input voltage V_{IN} is between V_{REFL0} and V_{REFL1} , the currents i_A , i_B , i_C , and i_D are equal to $2i$, i , i , and $2i$, respectively. When the input voltage V_{IN} is not between V_{REFL0} and V_{REFL1} , the current i_A , i_B , i_C , and i_D is equal to i , $2i$, $2i$, and i , respectively.

Referring back to Fig. 47, a first current-steering transistor pair 1332, 1334 provides a path for current i from the current source 1336 to flow to integration nodes A and B and a second current-steering transistor pair 1338, 1340 provides a path for current i from current source 1342 to flow to capacitive elements 436, 438 connected to integration nodes A and B, respectively. The capacitive elements 436, 438 were described above. An additional current source 1344 provides current i to node B via transistor 1346 which is biased on by voltage V_{REFL1} . A precharge circuit 460, discussed above with respect to Fig. 11B, precharges integration nodes A and B to ground.

A third current-steering transistor pair 1352, 1354 provides a path for current i to flow from the capacitive element 436 at integration node C through the current source 1156 to ground. A fourth current-steering transistor pair 1358, 1360 provides a path for current i to flow from current source 1362 from the capacitive element 438 at integration node D. An additional current source 1364 sinks current from integration node C via transistor 1366 which is biased in the active state by reference voltage V_{REFL0} . The precharge circuit 460 precharges

integration nodes C and D to the supply voltage V_{DD} . The current sources, 1336, 1342, 1344, 1356, 1362, 1364 source or sink the same amount of current i .

Referring also to Fig. 48, the states of the integrator are distinguishable, as follows. When V_{IN} is greater than V_{REFL0} or less than V_{REFL1} node A is charged with current i , node B is charged with current $2i$, node C is discharged with current $2i$ and node D is discharged with current i . When V_{IN} is less than V_{REFL0} and greater than V_{REFL1} , node A is charged with current $2i$, node B is charged with current i , node C is discharged with current i , and node D is discharged with current $2i$. When V_{IN} is between V_{REFL0} and V_{REFL1} the output voltage V_{OUT} of the integrator, which is defined by the following relationship: $(V_A - V_B) + (V_C - V_D)$, is interpreted as a logical one, otherwise the output voltage V_{OUT} is interpreted as a logical zero by a subsequent sense amplifier, such as the sense amplifier 600 of Fig. 14, and stored in the latch 650 (Fig. 14).

In an alternate embodiment, integration nodes A and C are connected to one end of the capacitive element 436, while the other end of the capacitive element 436 is connected to ground; and, integration nodes B and D are connected to one end of the capacitive element 438, while the other end of the capacitive element 438 is connected to ground.

In another embodiment, the integration nodes of the multi-PAM integrator 1330 are coupled to the equalization circuit 900 of Fig. 26A to compensate for inter-symbol interference. In another alternate embodiment, the voltage offset cancellation circuit 930 of Fig. 27A is coupled to the integration nodes of the multi-PAM integrator 1330. In yet another alternate embodiment, the static current sources 940 are coupled to the integration nodes of the multi-PAM integrator 1330. Alternately, the delta-capacitor circuit 944 of Fig. 28D is coupled to one of the integration nodes of the multi-PAM integrator 1330.

The multi-PAM receiver system works in accordance with the timing diagram of Fig. 8. In another embodiment, the multi-PAM receiver system is used as the receivers 780 in the multi-phased configuration of Fig. 24, and operated in accordance with the timing diagram of Fig. 25.

In an alternate embodiment, the timing diagram of Fig. 16 applies to the multi-PAM receiver system. In yet another embodiment, the circuit to generate the “reliable data window” of Fig. 17B is used with the multi-PAM receiver system. In yet another alternate embodiment, the multi-PAM integrating receiver is used as a phase detector in the clock recovery circuit 751 of Fig. 18. Alternately, the adjustment system of Fig. 20 sets the timing of each receiver in a system having multiple integrating receivers. In an alternate embodiment, the adjustment circuit of Fig. 23A adjusts the timing of the precharge and sense signals for a set of pins that receive incoming signals.

A Multi-PAM Reference Voltage Generator

In Fig. 49, a 4-PAM reference voltage generator 1380 generates the multi-PAM reference voltages V_{REFL0} , V_{REFM} and V_{REFL1} from external voltages V_{TERM} and V_{REF} supplied on input pins 1382, 1384, respectively. Unity gain amplifiers 1386, 1388 receive and output the input voltages V_{TERM} and V_{REF} , respectively. A voltage divider, including series-connected resistors R1, R2, and R3, is coupled between the outputs of the unity gain amplifiers 1386 and 1388. The lowest voltage V_{REF} is selected to drive V_{REFL1} via a power driver 1390. Power drivers 1392, 1394 are coupled between resistors R3, R2 and R2 to provide reference voltages V_{REFL0} and V_{REFM} , respectively. The power drivers 1390-1394 are connected as unity gain amplifiers.

In one embodiment, the resistor values are selected such that resistors R2 and R3 have twice the resistance of resistor R1, and V_{REF} , which is supplied externally, is equal to the desired V_{REFL1} voltage.

An Exemplary Multi-PAM Receiver Timing Circuit

In Fig. 50, the receiver timing circuit 1116 of Fig. 40 is shown. The receiver timing circuit 1116 operates in accordance with the timing diagram of Fig. 17C. The system clock is input to a phase splitter 1402 to generate phase aligned true and complementary system clock signals. Receiver delay generators 1404 delay the true and complementary signals in accordance with the window control signals. Phase splitters 1406 generate the true and complementary precharge signals for the odd and even data.

Because the receiver delay generators provide a fixed or “overhead” delay in addition to the specified delay, delay element 1407 provides that same amount of delay to the true system clock signal to generate the sense signal to provide a desired phase relationship between the precharge and sense signals. To generate the sense signal, a delay element 1407 delays the true system signal for the same amount of time as the receiver delay generators 1404. In one implementation of delay element 1407, the true system clock is delayed by four inverters 1408, which provide the same delay as the fixed or inherent delay of delay generator blocks 1404. Two phase splitters 1410 generate the true and complementary sense signals for the even and odd data. In an ideal embodiment, the receiver delay generators 1404 do not provide the fixed amount of delay in addition to the specified delay, and the delay element 1407 is not used.

In Fig. 51, a circuit diagram of one embodiment of a receiver delay generator 1404 is shown. Three window control signals (Window Control 0, Window Control 1 and Window Control 2) determine the amount of delay to the input signal. The input signal is supplied to a multiplexor 1416 through two paths, a first path includes a first set of three inverters 1418, and a second path includes a second set of inverters 1418 and the first set of inverters 1420. Window control 2 selects either the first or second path, whereas Window Control 0 and Window Control 1 adjust the fan-out seen by inverters 1418-1 and 1418-2.

To increase the amount of delay, selectable delay elements 1422 are connected to the nodes 1423-1, 1423-2 between the inverters of the first set of inverters 1418. Window control 1

controls selectable delay elements 1422-1 and 1422-2. Window control 2 controls selectable delay elements 1422-3 and 1422-4. Pairs of selectable delay elements are binary weighted. Selectable delay elements 1422-3 and 1422-4 add twice as much delay as selectable delay elements 1422-1 and 1422-2. Each selectable delay element increases the amount of delay to the input signal. Since the selectable delay elements are the same, except for the binary
5 weighting, the operation of selectable delay element 1422-1 will be described. When window control 1 is activated, passgate pair 1424 becomes active and couples a delay element 1426 to the first set of inverters 1418. In the delay element 1426, first and second delay blocks, 1428 and 1430, respectively, are connected in series between the supply voltage and ground. The first delay block 1428 includes a PMOS transistor 1432 with its source and drain connected
10 together to the supply voltage. The second delay block 1430 includes an NMOS transistor 1438 with its source and drain connected together to ground.

By adding capacitive load to the input signal path, the input signal is delayed. The amount of delay is proportional to the capacitive load added to nodes 1423-1 and 1423-2.

An Exemplary Multi-PAM System

In Fig. 52A, a semiconductor device 1450 uses the multi-PAM output drivers and receivers of the present invention. A control path 1452 receives a control signal from a control
20 input/output (I/O) pin 1454. Control signals are received on both the odd and even phases of the system clock. An odd mode integrating receiver 1456 determines the control signals in the odd phase, while an even mode integrating receiver 1458 determines the control signals during the even phase. Except for being active on different phases, the even and odd mode integrating receivers, 1456 and 1458, respectively, are the same.

In the odd mode integrating receiver 1456, one series of components 1460 decodes the MSB from the control signal, and a second series of components 1462 decodes the LSB from the control signal. Each series of components includes a multi-PAM preamplifier 1464, a multi-PAM integrator 1466 and a latch 1468, which were discussed above. As discussed above, in
30 the second series of components 1462 that determine the LSB, the preamplifier 1464-2

includes additional logic 1470. The decoded control signals are supplied to an I/O controller 1472.

In the data path 1455, a data signal is received on a data I/O pin 1474. As discussed above, even and odd data are received and decoded by an odd mode integrating receiver 1476 and an even mode integrating receiver 1478. The data path 1455 includes an odd mode output driver 1480 and an even mode output driver 1482 to output a multi-PAM signal onto the data bus 1474. Except for being active in different phases of the system clock, the odd and even mode output drivers, 1480 and 1482, respectively, are the same.

In the odd mode output driver 1480, a logic circuit 1484, discussed above, receive the odd LSB and MSB from another circuit, such as a memory 1486. The logic circuit 1484 generates the multi-PAM A, B, and C signals, discussed above, which are supplied to the multi-PAM decoder 1488. The multi-PAM decoder 1488 outputs three voltage levels V_A , V_B and V_C which are supplied to an output driver 1490.

The I/O controller 1472 communicates with the memory 1486 to synchronize the timing of the control signals and data signals.

Referring back to Fig. 41, in an alternate embodiment, the even and odd mode integrating receivers for the control 1452 and data path 1455 share a single a single preamplifier. In another alternate embodiment, no preamplifier is used as shown in Fig. 42.

Fig. 52B is a block diagram of a chip using an alternate embodiment of the multi-PAM receiver system of the present invention. This embodiment is the same as Fig. 52A except that the same output driver 1490 is used to drive both even and odd mode data.

Automatic Detection of a Multi-PAM Mode

In Fig. 53, a package and circuit configuration are used to automatically detect whether a device is installed in a 2-PAM or a 4-PAM system. The bottom of the device package 1500 has a “footprint” of metal contacts 1502. In particular, two contacts 1504 and 1506 are used to determine whether the package is installed in a 2-PAM or a 4-PAM system. In a 2-PAM system, the contacts 1504 and 1506 will not be connected to the reference voltages V_{REFL0} and V_{REFL1} , respectively. In a 4-PAM system, the contacts 1504 and 1506 will be connected to the reference voltages V_{REFL0} and V_{REFL1} , respectively. In the device, transistors 1508, 1510 are weak transistors to pull-up and pull-down lines 1512 and 1514 to the supply voltage and ground, respectively. In a 2-PAM system, when the reference voltages V_{REFL0} and V_{REFL1} are not supplied, lines 1512 and 1514 are at ground and the supply voltage, respectively; therefore the comparator 1516 outputs a zero as the mode signal. In a 4-PAM system, when the reference voltages V_{REFL0} and V_{REFL1} are supplied, lines 1512 and 1514 are at V_{REFL0} and V_{REFL1} , respectively; therefore the comparator 1516 outputs a one as the mode signal, and 4-PAM mode is enabled.

A Multi-PAM Device and Bus

In Fig. 54A, to provide compatibility with 2-PAM legacy systems and 4-PAM systems, an exemplary slave device 1518 is capable of operating at either 2-PAM or 4-PAM in accordance with an embodiment of the present invention. A control block 1519 provides control signals on control signal lines of the bus. The control signals operate at 2-PAM. Data interface blocks 1520 drive and receive subsets of the data signals on the data bus. In one implementation, each subset of data is one byte. Each data interface block 1520 can operate at both 2-PAM and 4-PAM. In one embodiment, the circuit of Fig. 53 determines whether the slave device operates at 2-PAM or 4-PAM.

Fig. 54B is a diagram of an exemplary legacy data bus operating at 2-PAM using the device of Fig. 54A. The master device 1521 and memory devices 1522 operate at 2-PAM.

Fig. 54C is a diagram of an exemplary data bus operating at 4-PAM using the device of Fig. 54A. The master device 1524 and memory devices 1526 operate at 4-PAM.

5

Controlling the Data Rate in a 2-PAM/4-PAM System

In Fig. 55, a multi-PAM bus 320 connects the memory controller 321 to memories 322. In the memory controller 321, the bus output drivers 323 and receivers 324 can operate in either 2-PAM or 4-PAM mode. In one embodiment, the control, address and data signals use the same multi-PAM mode, such as 4-PAM. However, because 4-PAM may be more susceptible to errors from noise than 2-PAM, to improve system reliability, in another embodiment, the control signals use the 2-PAM mode.

Additionally, the data may alternate between 2-PAM mode and 4-PAM mode. By setting the LSB to zero and using the MSB to transmit data, 4-PAM signaling is converted to 2-PAM signaling. 2-PAM signaling reduces the data rate by one-half, but increases the signal voltage margins.

To control the data rate, at the beginning of system operation, a pattern generator 1530 exchanges data with the memories 322, and determines the error rate. If the error rate is above a predetermined threshold, 2-PAM signaling is used. In one implementation, the pattern generator periodically determines the error rate, and determines whether to operate the system at 2-PAM or 4-PAM.

In Fig. 56, a flowchart of a method for determining whether to operate a data bus 320 (Fig. 55) at 2-PAM or 4-PAM is shown. In step 1550, at system start-up, the bus controller 321 (Fig. 55) configures the system for 4-PAM signaling. In step, 1552, the pattern generator

1530 of the bus controller 321 (Fig. 55) transmits a data sequence to the memories 322 (Fig. 55). In step 1554, the pattern generator 1530 (Fig. 55) reads the data sequence from the memories 322 (Fig. 55). In step 1556, the number of errors, if any, and the error rate of the data sequence is determined. In step 1558, if the number of errors is less than a first threshold, the bus controller 321 configures the system for 4-PAM signaling; otherwise the bus controller 321 configures the system for 2-PAM signaling. In step 1560, the bus controller 321 waits for a predetermined period of time. In step 1562, the bus controller 321 configures the system for 4-PAM signaling, then repeats the process at step 1552.

Error Correction

Transmission errors in a multi-PAM system can be corrected both by changing PAM modes and by changing the speed of the bus.

As shown in Fig. 57, a method for correcting for errors in the Multi-PAM system of Fig. 55 is shown. In step 1570, the system is operated at 4-PAM. In step 1572, if an error occurs, the LSB and MSB are switched and the system continues to operate at 4-PAM. In other words, a first binary digit is assigned as the LSB, and a second binary digit is assigned as the MSB. To switch the LSB and MSB, the first binary digit is assigned as the MSB and the second binary digit is assigned as the LSB in both the transmitter (output driver) and receiver. In this way, the signature of the transmitted data is changed, and the error may be corrected. In step 1574, if another error occurs, the system is then operated at 2-PAM, which is standard binary signaling. In step 1576, if yet another error occurs, the speed of the data bus is reduced, and the system continues to operate at 2-PAM. In step 1578, while the system is operating, the error-free time is continuously monitored and measured. When the error-free time equals a first predetermined time, the speed of the data bus is increased, and the system continues to operate at 2-PAM. Repeatedly, when the error-free time equals a second predetermined time, the speed of the data bus is increased, the second predetermined time is incremented, and the system continues to operate at 2-PAM, until the second predetermined time equals a PAM

threshold value. When the second predetermined time equal the PAM threshold value, the system is operated at 4-PAM.

- In an alternate embodiment, when an error occurs, the bus speed is reduced by one-half and data is re-transmitted using 4-PAM. If the first re-transmission fails, the system changes to 2-PAM mode and remains at the reduced bus speed.

Bidirectional Simultaneous Transmission

- 10 In Fig. 58, in one embodiment, the multi-PAM receiver is used to support simultaneous bidirectional communication in which multiple output drivers simultaneously drive the same bus signal line. A signal line 320-1 of a bus is attached to the memory controller 321 and a memory 322. The memory controller 321 and the memory 322 have bus output drivers 323 and receivers attached to the signal line 320-1. Both output drivers 323 simultaneously
- 15 transmit a 2-PAM signal. The 2-PAM signals are effectively added on the bus. Since the memory controller 321 and the memory 322 know what signal it transmitted on the bus at any time, the memory controller 321 and the memory 322 can subtract its own signal from the received signal. In this way the effective data rate of the signal line 320-1 is doubled.
- 20 To achieve the bi-directional bus, three voltage levels need to be present on the bus. However, this makes it difficult for any other device on the bus to discern a single "one" level. A device in the middle of the bus would be unable to determine which other component is transmitting the data. This problem is overcome by using a 4-PAM bus, and requiring that one device transmit a "one" to two-thirds of the full voltage swing, and the
- 25 other device transmit a "one" to one-third of the full voltage swing. In this way, devices in the middle of the bus can determine, from the voltage levels, which other device is transmitting information.

- In Fig. 59, a timing diagram shows the superposition of the signals. Using the multi-PAM receiver, the sequence of the superimposed data bits can be determined.

The efficiency of a memory subsystem often depends on the ratio of read operations to write operations. In typical memory systems, a read operation can immediately follow a write operation without a delay; however, a write operation followed by a read operation must wait a predetermined amount of time before the read operation. At a minimum, the predetermined amount of time is one clock cycle. As the frequency of switching from write to read operations increases, the effective bus efficiency decreases. Using simultaneous bidirectional transmission, an application that operates the bus at a fifty percent data rate (in each direction) can allow the bus to be one hundred percent efficient. Thus, by switching from 4-PAM transmission to simultaneous bidirectional transmission, the efficiency can be improved.

In another embodiment, 4-PAM encoding represents two streams of binary data, such that two reads or two writes from two different memory locations are encoded on the bus during a single data cycle. Such a memory has two data ports. In one embodiment, the ports are for half of the memory such that each port retrieves data from only one-half of the memory. A bidirectional mode bit that is set by the system determines whether the system operates in the simultaneous bidirectional mode, or one of the PAM modes. The system chooses the mode that maximizes efficiency depending on the mix of read and write operations in the application. For an application with an equal percentage of reads and writes, simultaneous bidirectional transmission would be chosen. For an application with significantly more reads than writes, 4-PAM transmission would be chosen. An example of an application with equal percentages of reads and writes is a data buffer. An example of an application having significantly more reads than writes is a look-up table.

Multi-PAM Receiver Testing Method

Conventional digital testing involves the use of 2-PAM signals, so a means for evaluating Multi-PAM signals must be devised. A 2-PAM signal may be characterized by its “eye” diagram. The “eye” diagram represents the ranges of transmission voltages and signal transmission times for which data transmission is successful. The width of each “eye” represents the range of signal transition times, as compared to an ideal center time, which still results in successful data transmission. The height of each “eye” represents the amount of voltage error and noise that the device under test can tolerate. In general, the larger the “eye”, the better the device characteristics. A larger “eye” means larger timing and voltage margins and increased tolerance to noise and timing skew.

Testing determines the range of transmission voltages and signal transition times for which the device under test can successfully receive data and compares this region to some voltage and timing criteria appropriate for the system. Receiver testing may be done by repeatedly sending data to the device under test using different transmission voltages and signal transmission times and measuring the region for which transmission was successful. As shown in Fig. 60A, a 4-PAM signal has six possible distinct, 2-PAM transitions. Each of these transitions will have its own “eye” pattern.

Receiver testing may be done by individually measuring the six eyes and comparing each of them to timing and voltage criteria. As shown in Fig. 60B, after determining the “eye” for each transition, the corresponding eye patterns are overlayed (e.g., logically ANDed together) to generate the overall device performance characteristics.

Although the present invention has been described in considerable detail with reference to certain preferred versions thereof, other versions are possible. Therefore, the spirit and scope of the appended claims should not be limited to the description of the preferred versions contained herein.

WHAT IS CLAIMED IS:

- 1 1. An output driver to drive on a multi-drop bus, an output symbol representing at least
2 two bits including a most significant bit (MSB) and a least significant bit (LSB), comprising:
3 a first drive block to generate a MSB symbol component representing the MSB; and
4 a second drive block to generate an LSB symbol component representing the LSB, the
5 LSB symbol component being combined with the MSB symbol component to provide the
6 output symbol.
- 1 2. The output driver of claim 1 wherein the first drive block is connected in parallel with
2 the second drive block.
- 1 3. The output driver of claim 1 wherein the first drive block includes one or more first
2 drive transistors, the second drive block includes one or more second drive transistors, the
3 first and second drive blocks having the same number of drive transistors, wherein the first
4 drive transistors of the first drive block provide twice as much current as the second drive
5 transistors of the second drive block.
- 1 4. The output driver of claim 1 wherein the first drive block includes one or more first
2 drive transistors, the first drive transistors being binary weighted with respect to each other to
3 provide correspondingly weighted amounts of current in response to the MSB, the second
4 drive block includes one or more second drive transistors, the second drive transistors being
5 binary weighted with respect to each other to provide correspondingly weighted amounts of
6 current in response to the LSB, the first and second drive blocks having the same number of
7 drive transistors.
- 1 5. The output driver of claim 3 wherein a set of current control signals enables and
2 disables corresponding ones of the first and second drive transistors.
- 1 6. The output driver of claim 1 wherein binary signaling is used by setting the LSB
2 symbol equal to zero.

1 7. The output driver of claim 3 wherein drive transistors are connected to an I/O pin,
2 further comprising at least one constant current transistor connected to the I/O pin to provide
3 a substantially continuous flow of current through the I/O pin to increase noise immunity.

1 8. An output driver to drive an output symbol representing two or more bits including a
2 most significant bit (MSB) and a least significant bit (LSB), comprising:
3 a logic circuit to generate a set of transistor enable signals based on a state of the MSB
4 and the LSB; and
5 a set of weighted transistors, each weighted transistor being responsive to one
6 transistor enable signal of the set of transistor enable signals.

1 9. The output driver of claim 8 wherein the weighted transistors of the set of weighted
2 transistors are weighted to compensate for gds distortion.

1 10. The output driver of claim 8 further comprising:
2 a set of current control transistors, responsive to current control signals, coupled to the
3 set of weighted transistors, to adjust an amount of current supplied by the output driver.

1 11. The output driver of claim 8 wherein each weighted transistor is differentially coupled
2 to another correspondingly weighted transistor that is enabled to provide a continuous flow of
3 current to increase noise immunity.

1 12. An output driver to drive an output symbol representing two or more bits including a
2 most significant bit (MSB) and a least significant bit (LSB), comprising:
3 a logic circuit to generate a set of transistor enable signals in accordance with a state
4 of the MSB and LSB; and
5 a set of drive blocks, each drive block being responsive to one of the transistor enable
6 signals, each drive block including a drive transistor responsive to one of the transistor enable
7 signals, at least of subset of the drive blocks including a gds compensation transistor

8 responsive to one of the transistor enable signals, each gds compensation transistor having a
9 predefined geometry to compensate for gds distortion.

1 13. An output driver to drive an output symbol representing two or more bits including a
2 most significant bit (MSB) and a least significant bit (LSB), comprising:

3 a logic circuit to generate a set of transistor enable signals in accordance with a state
4 of the MSB and LSB; and

5 a set of drive blocks, each drive block including a set of drive transistors connected in
6 series with a set of current-control transistors, the drive transistors being responsive to one of
7 the transistor enable signals, the set of current-control transistors being responsive to a set of
8 current control signals, at least of subset of the drive blocks including a set of gds
9 compensation transistors connected in series with a set of gds-current-control transistors, the
10 gds compensation transistors being responsive to one of the transistor enable signals, and the
11 gds-current-control transistors being responsive to gds-current-control signals.

1 14. The output driver of claim 13 wherein each set of drive transistors of the drive block
2 are binary weighted.

1 15. A bus receiver to receive an input symbol representing two or more bits including a
2 most significant bit (MSB) and a least significant bit (LSB), comprising:

3 a MSB latching comparator to compare the input symbol to a MSB threshold voltage
4 to generate a first binary output signal representing a state of the MSB;

5 a first LSB latching comparator to compare the input symbol to a first reference
6 voltage to generate a second binary output signal representing the relationship between the
7 input symbol and the first reference voltage;

8 a second LSB latching comparator to compare the input symbol to a second reference
9 voltage to generate a third binary output signal representing the relationship between the
10 input symbol and the second reference voltage; and

11 a logic block to generate a fourth binary output signal representing a state of the LSB
12 in accordance with the first, second and third binary output signals.

1 16. The bus receiver of claim 15 wherein the first, second and third latching comparators
2 generate their respective binary output signals synchronized to a clock signal.

1 17. A bus receiver to receive an input symbol representing two or more bits, each bit
2 being associated with at least one threshold voltage of a set of threshold voltages, comprising:
3 a most-significant-bit (MSB) receiver to receive the input symbol and provide an
4 MSB logic signal representing a most-significant bit of the input symbol; and
5 a least-significant-bit (LSB) receiver to receive the input symbol and provide an LSB
6 logic signal representing a least-significant bit of the input symbol.

1 18. The bus receiver of claim 17 wherein the MSB receiver and LSB receiver include:
2 at least one integrator to generate integration voltages on integration nodes by
3 integrating charge in accordance with a voltage associated with the input symbol and one or
4 more threshold voltages of the set of threshold voltages; and
5 at least one sense amplifier to receive the integration voltages of the at least one
6 integrator to generate the logic signal of the respective receiver.

1 19. The bus receiver of claim 17 wherein the MSB receiver and LSB receiver include:
2 at least one preamplifier to generate the input symbol by adjusting an unconditioned
3 input symbol in accordance with the relationship of the unconditioned input symbol to ranges
4 of voltages defined by the voltages of the set of threshold voltages;
5 at least one integrator to generate integration voltages on integration nodes by
6 integrating a charge in accordance with a voltage associated with the input symbol; and
7 at least one sense amplifier to receive the integration voltages of the at least one
8 integrator to generate at least one logic signal representing a relationship of the input symbol
9 to the one or more threshold voltages of the set of threshold voltages.

1 20. A memory comprising:
2 an array of memory cells;
3 an address decoder;

4 a plurality of bus receivers to receive an address and also to receive input symbols,
5 each input symbol representing a predetermined number of bits, each bit being associated
6 with a range of voltage levels, a set of threshold voltages defining each range of voltage
7 levels, comprising:

8 a most-significant bit (MSB) receiver to determine a MSB of the input symbol in
9 accordance with a first threshold voltage of the set of threshold voltages; and

10 a least-significant bit (LSB) receiver to determine a LSB of the input symbol in
11 accordance with second and third threshold voltages of the set of threshold voltages;

12 an I/O circuit to store the MSB of the input symbol and LSB of the input symbol in a
13 subset of memory cells of the array of memory cells.

1 21. The memory of claim 20 wherein the first threshold voltage is less than the second
2 threshold voltage, and the first threshold voltage is greater than the third threshold voltage.

1 22. The memory of claim 20,
2 wherein the MSB receiver includes:

3 at least one MSB integrator to generate integration voltages on integration nodes by
4 integrating charge in accordance with a voltage of the input symbol with respect to the first
5 threshold voltage; and

6 at least one MSB sense amplifier to receive the integration voltages of the at least one
7 MSB integrator to generate at least one MSB logic signal representing the relationship of the
8 input symbol to the first threshold voltage; and

9 wherein the LSB receiver includes:

10 at least one LSB integrator to generate integration voltages on integration nodes by
11 integrating charge associated with the voltage of the input symbol output with respect to the
12 second and third threshold voltages; and

13 at least one LSB sense amplifier to receive the integration voltages of the at least one
14 LSB integrator to generate at least one LSB logic signal representing the relationship of the
15 input symbol to the second and third threshold voltages,

16 wherein the I/O circuit stores signals representing the MSB logic signal and the LSB
17 logic signal in the subset of memory cells of the memory array, as specified by the address.

1 23. The memory of claim 20 wherein the MSB receiver includes:

2 at least one MSB preamplifier to generate a MSB preamplified signal in accordance
3 with a relationship of the input symbol to a first threshold voltage of the set of threshold
4 voltages;

5 at least one MSB integrator to accumulate charge to produce an output voltage in
6 accordance with the MSB preamplified signal during an integration time interval defined by a
7 start integration timing event and an end integration timing event; and

8 at least one MSB sense amplifier to sample and convert the output voltage from the
9 MSB integrator into a MSB logic signal representing a MSB state of the input signal; and
10 wherein the LSB receiver includes:

11 at least one LSB preamplifier to generate a LSB preamplified signal in accordance
12 with a relationship of the input symbol to a second and third threshold voltage of the set of
13 threshold voltages;

14 at least one LSB integrator to accumulate charge to produce an output voltage in
15 accordance with the LSB preamplified signal during an integration time interval defined by a
16 start integration timing event and an end integration timing event; and

17 at least one LSB sense amplifier to sample and convert the output voltage from the
18 LSB integrator into an LSB logic signal representing a LSB state of the input signal,

19 wherein the I/O circuit stores signals representing the MSB logic signal and the LSB
20 logic signal in the subset of memory cells of the memory array, as specified by the address.

1 24. The memory of claim 23 wherein the first threshold voltage is less than the second
2 threshold voltage, and the first threshold voltage is greater than the third threshold voltage.

1 25. The memory of claim 20, further comprising:

2 a mode detection circuit to supply a PAM mode signal to cause the MSB receiver and
3 LSB receiver to operate in either 4-PAM or 2-PAM mode.

1 26. A method of correcting for errors in a multi-Pulse Amplitude Modulated (PAM)
2 system including a multi-PAM output driver and a multi-PAM receiver coupled via a data
3 bus, comprising:

4 operating the multi-PAM output driver and the multi-PAM receiver at 4-PAM to
5 exchange multi-PAM data on a bus;

6 determining whether an error occurred in the multi-PAM data; and

7 operating the multi-PAM output driver and the multi-PAM receiver at 2-PAM to
8 exchange binary data on the bus.

1 27. The method of claim 26 wherein the multi-PAM output driver and the multi-PAM
2 receiver are operated at a first data rate, and further comprising:

3 reducing the first data rate in response to the error.

1 28. The method of claim 27 further comprising:

2 measuring an error-free time; and

3 increasing the first data rate when the error-free time equals a predetermined value.

1 29. The method of claim 27 further comprising:

2 measuring an error-free time; and

3 operating the multi-PAM output driver and the multi-PAM receiver at 4-PAM when
4 the error-free time equals a predetermined value.

1 30. A method of correcting for errors in a multi-Pulse Amplitude Modulated (PAM)
2 system, comprising:

3 operating a multi-PAM output driver and a multi-PAM receiver at 4-PAM to
4 exchange data on a bus, wherein the multi-PAM output driver and the multi-PAM receiver
5 transmit and receive an encoded multi-PAM symbol having a most-significant bit (MSB) and
6 a least-significant bit (LSB);

7 determining when an error occurs in the data; and

8 switching the MSB and LSB when an error occurs.

1 31. A bus system comprising:
2 a signal line;
3 a first output driver to transmit a first data signal on the signal line;
4 a second output driver to transmit a second data signal on the signal line
5 simultaneously with the first data signal such that the first and second data signals are
6 superimposed to produce a superimposed data signal on the signal line, the superimposed
7 data signal having a plurality of voltage levels representing the combinations of the
8 simultaneously transmitted data signals;
9 a first receiver to receive the superimposed signal, to determine a digital
10 representation of the superimposed data signal, and identifying the data signal transmitted by
11 the second output driver from the superimposed data signal; and
12 a second receiver to receive the superimposed signal, to determine a digital
13 representation of the superimposed data signal, and identifying the data signal transmitted
14 from the first output driver from the superimposed data signal.

1 32. A memory system comprising:
2 a bus having a plurality of signal lines:
3 a plurality of output drivers to drive an output symbol representing a predetermined
4 number of bits including a most significant bit (MSB) and a least significant bit (LSB) on a
5 first subset of the signal lines; and
6 a plurality of receivers, each receiver to receive the output symbol from a respective
7 signal line as an input symbol, each input symbol representing the predetermined number of
8 bits, the receivers outputting a plurality of logic signals representing the state of the MSB
9 and LSB of the input symbol.

1 33. The memory system of claim 32 wherein the memory system is operated as a 4-PAM
2 system such that the output symbol has an MSB and an LSB; and the memory system is
3 operated as a 2-PAM system by setting the LSB of the output symbol to zero to generate a 2-
4 PAM symbol.

1 34. The memory system of claim 32 wherein the first set of signal lines include control
2 signal lines and data signal lines, the control signal lines being 2-PAM, and the data signal
3 lines being 4-PAM.

1 35. The memory system of claim 32 wherein the memory system is responsive to a mode
2 signal to switch between 4-PAM and 2-PAM.

1 36. The memory system of claim 35 wherein the mode signal is determined by a hardware
2 setting.

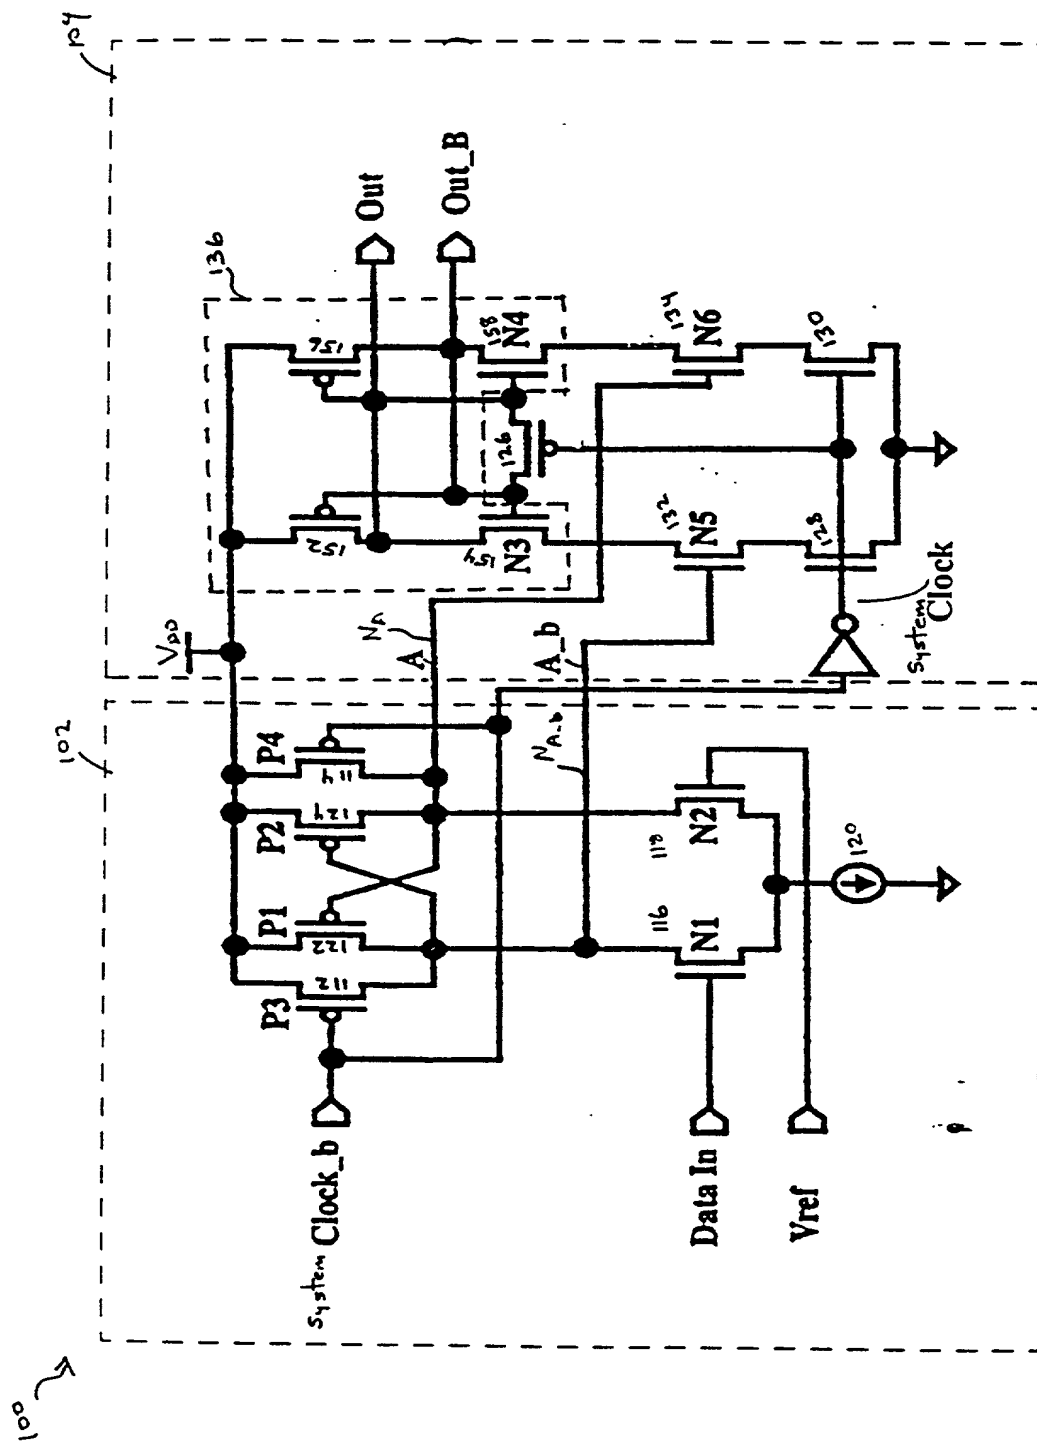
1 37. The memory system of claim 32 wherein the memory system is responsive to
2 detected errors to switch between 4-PAM and 2-PAM.

1 38. A memory system comprising:
2 a bus having a plurality of signal lines;
3 a first subset of the signal lines being coupled to a plurality of output drivers, each
4 output driver to drive an output symbol representing two bits including a most significant bit
5 (MSB) and a least significant bit (LSB) on the signal line, each output driver including:
6 a first drive block to generate a MSB symbol component representing the
7 MSB; and
8 a second drive block to generate an LSB symbol component representing the
9 LSB, the LSB symbol component being combined with the MSB symbol component to
10 provide the output symbol;
11 a second subset of the signal lines, including the first subset of signal lines, being
12 coupled to a plurality of bus receivers to receive an address and the output symbols, the
13 received output symbols being input symbols, each input symbol representing a
14 predetermined number of bits, each bit being associated with a distinct range of voltage
15 levels, a set of threshold voltages defining each distinct range of voltage levels, each bus
16 receiver including:
17 a most-significant bit (MSB) receiver to determine the MSB of the input symbol
18 based on a first threshold voltage of the set of threshold voltages; and


19
20

- 1
- 2
- 3
- 4
- 5
- 6
- 7

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9
- 10



Prior Art

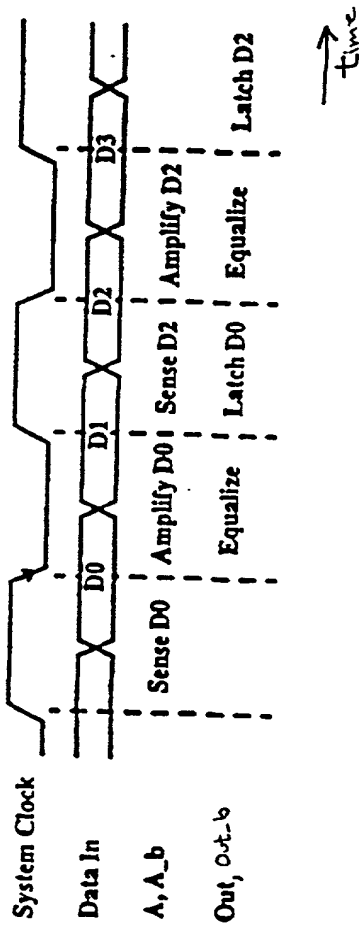

Pror Art

FIG. 2


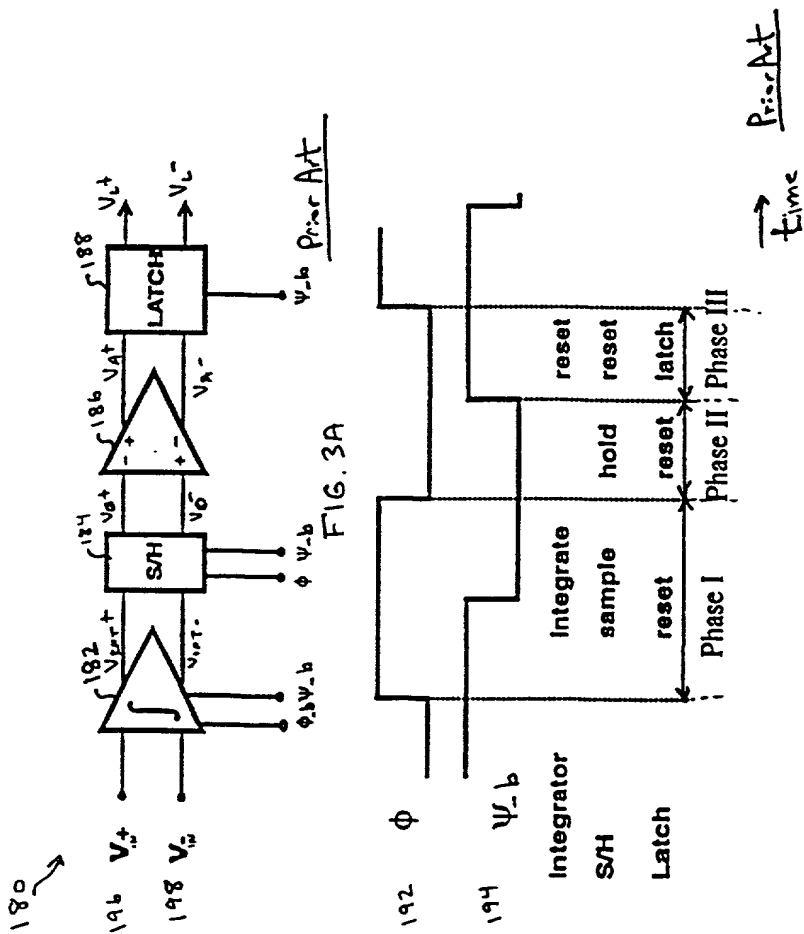
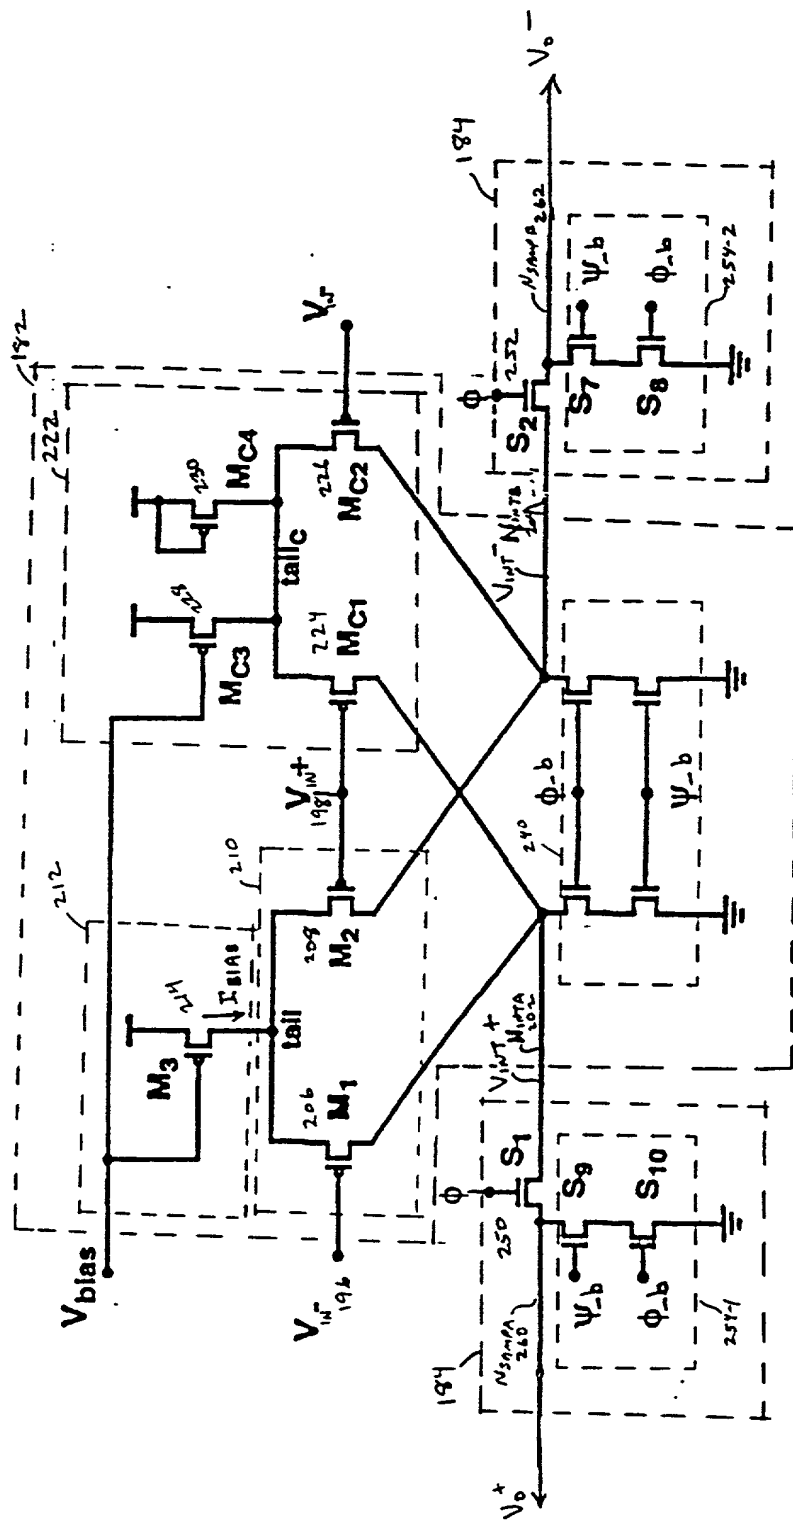


FIG. 3B

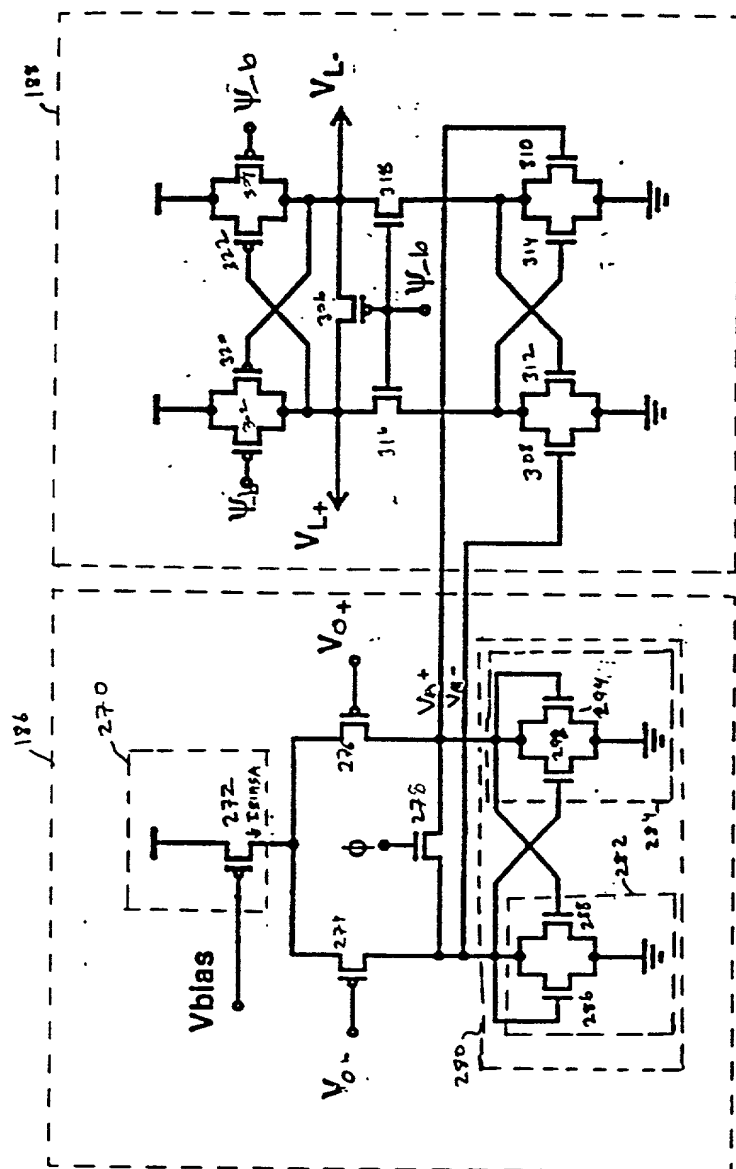

Prior Art

FIG. 4

Prior Art

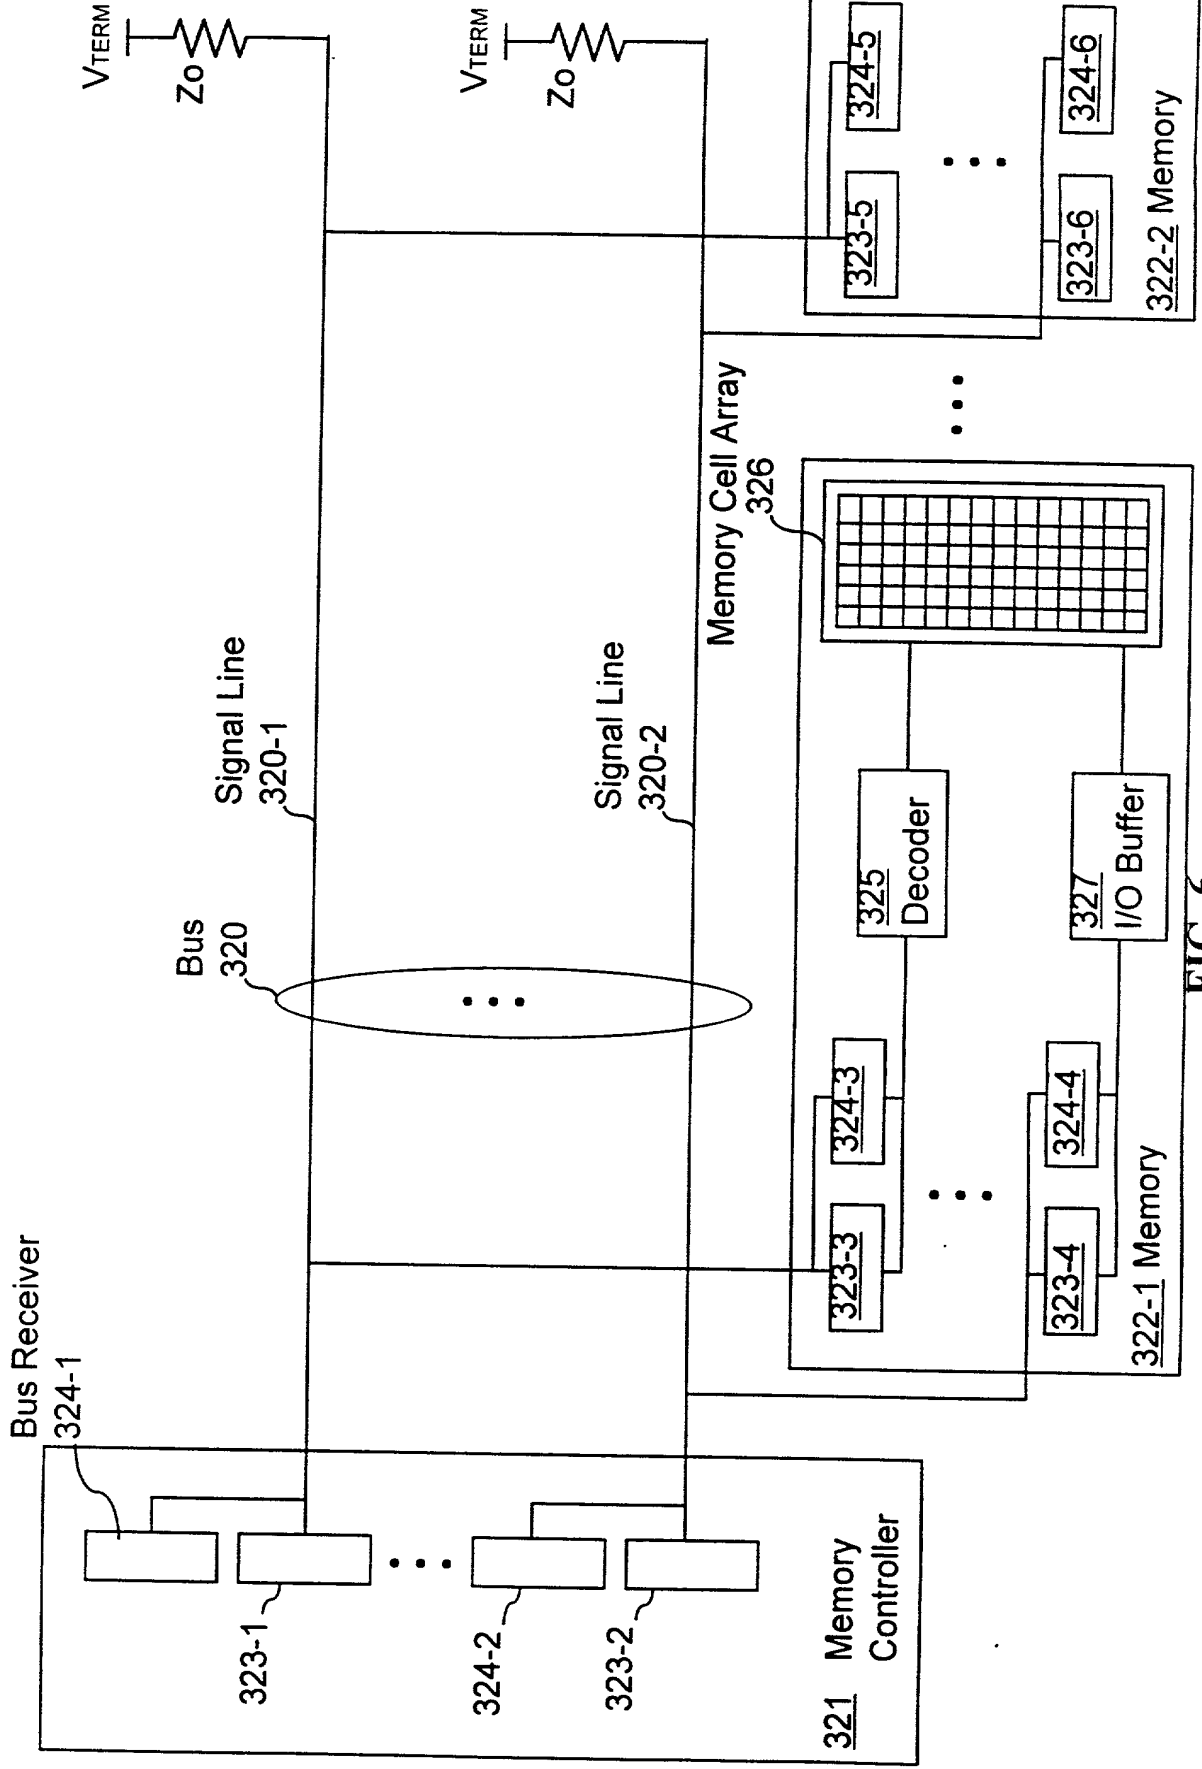


FIG. 6

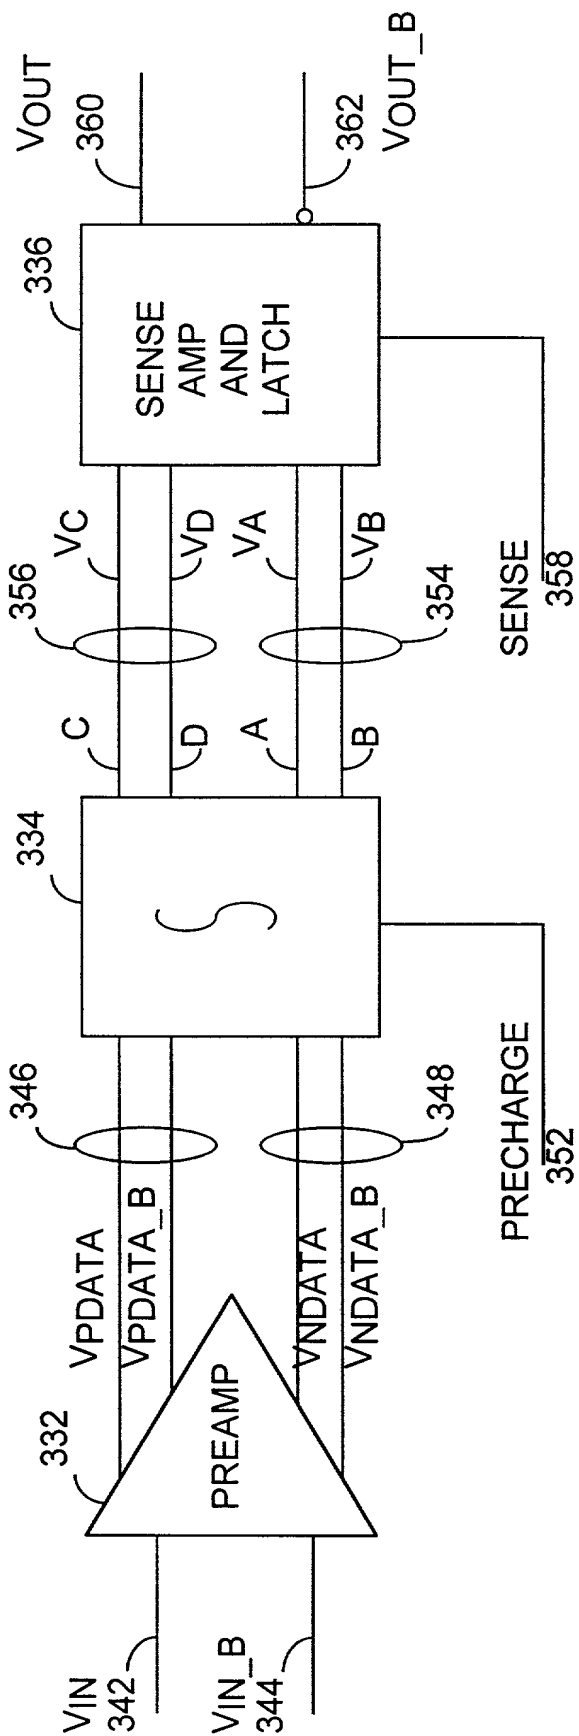


FIG. 7A

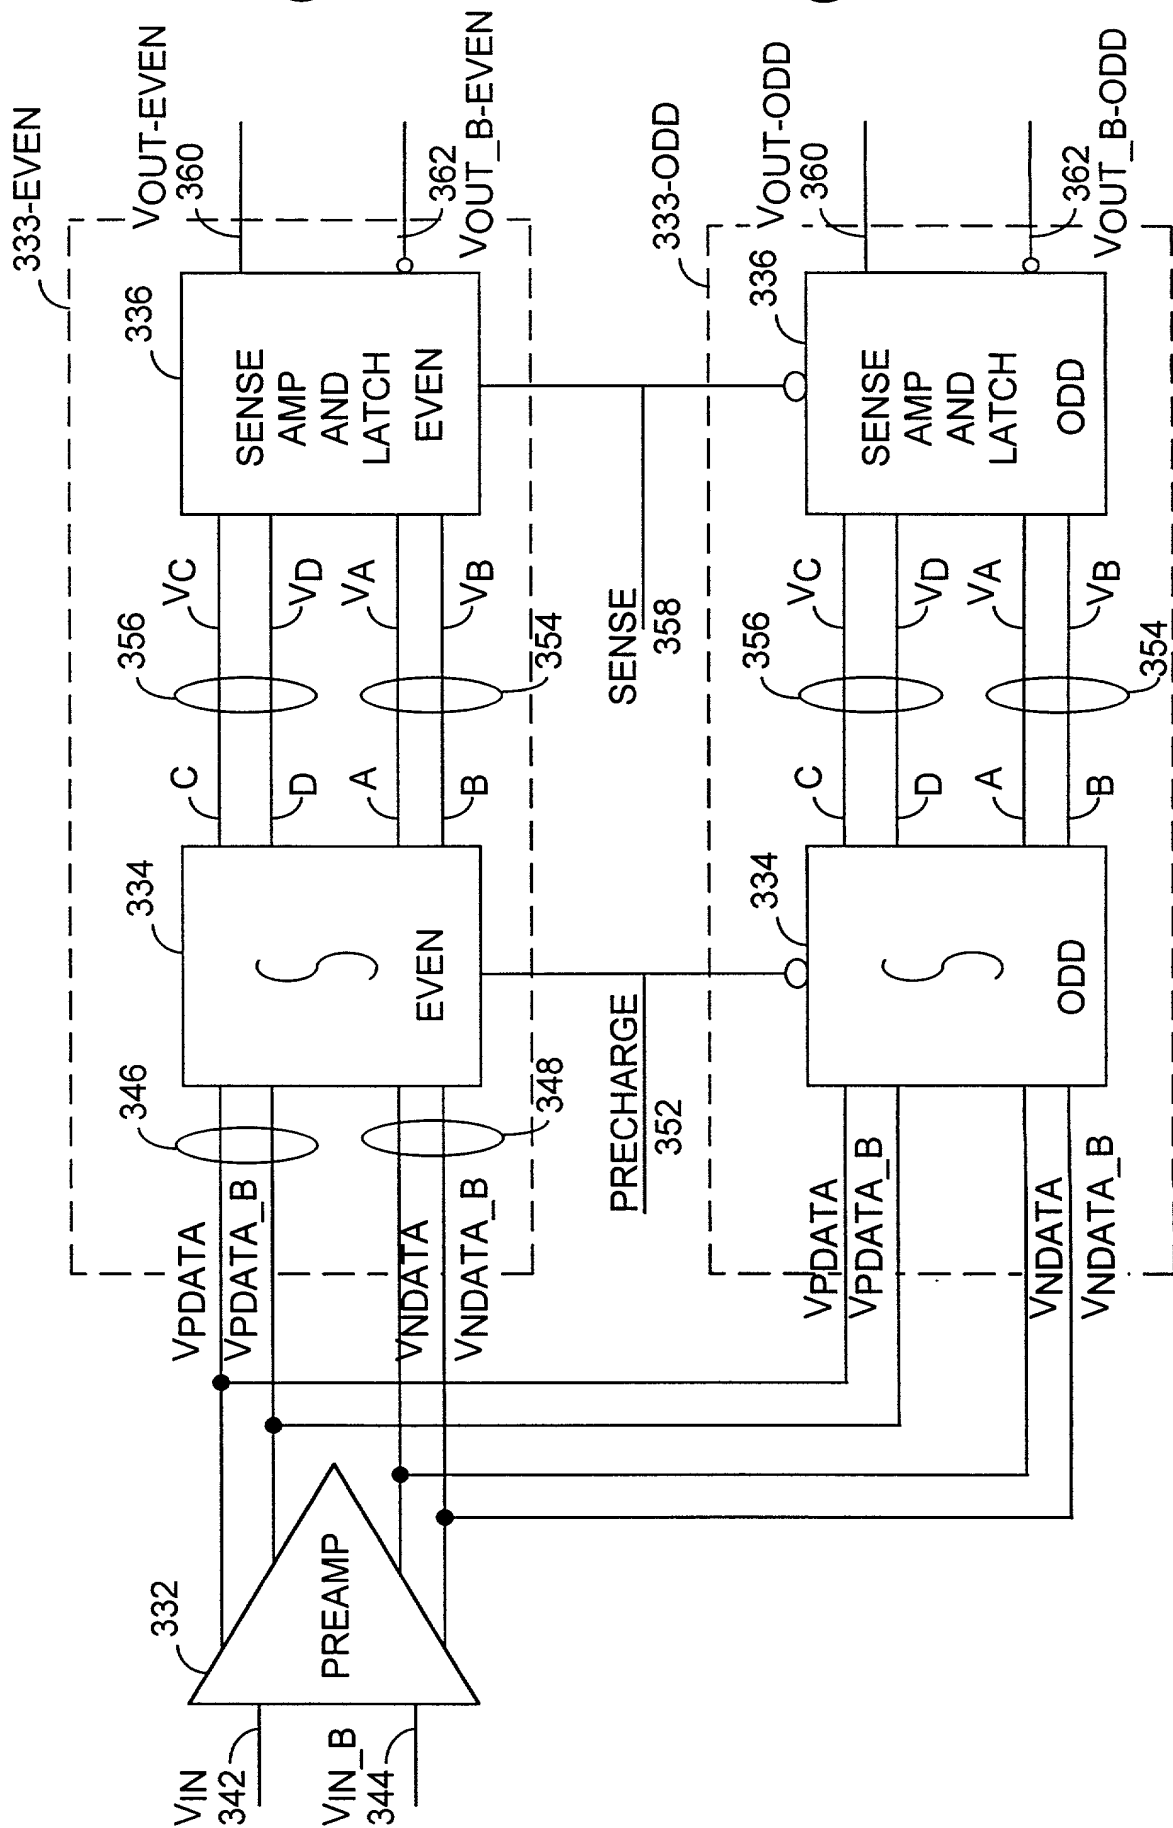


FIG. 7B

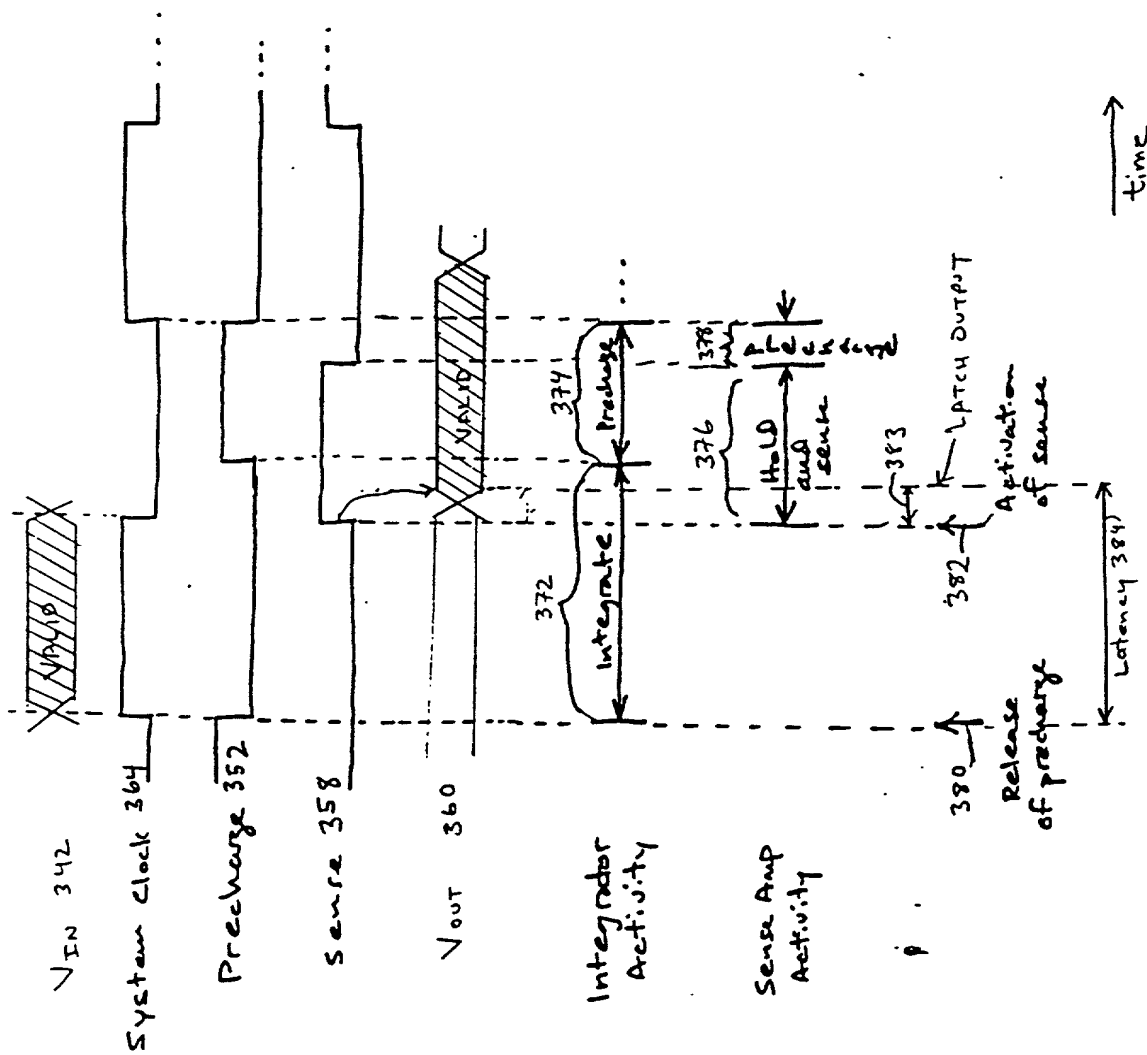


FIG. 8

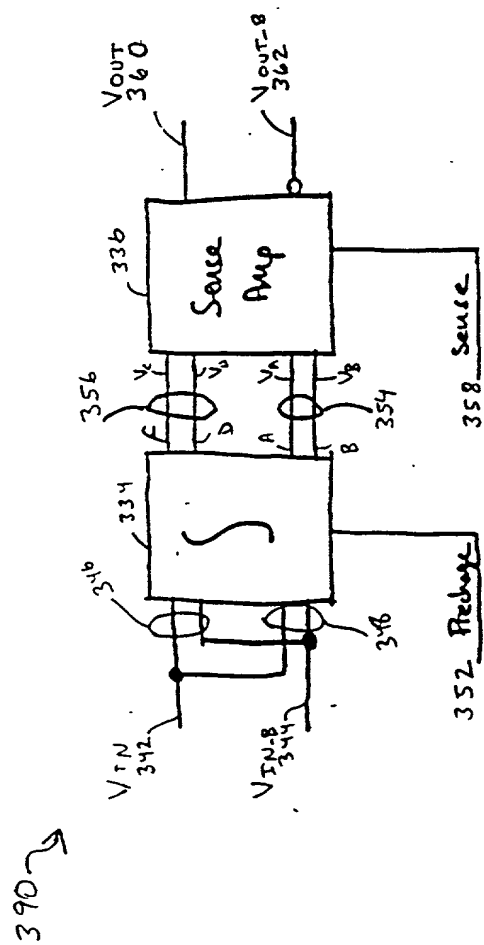


FIG. 9

Preamp. f. v
332A

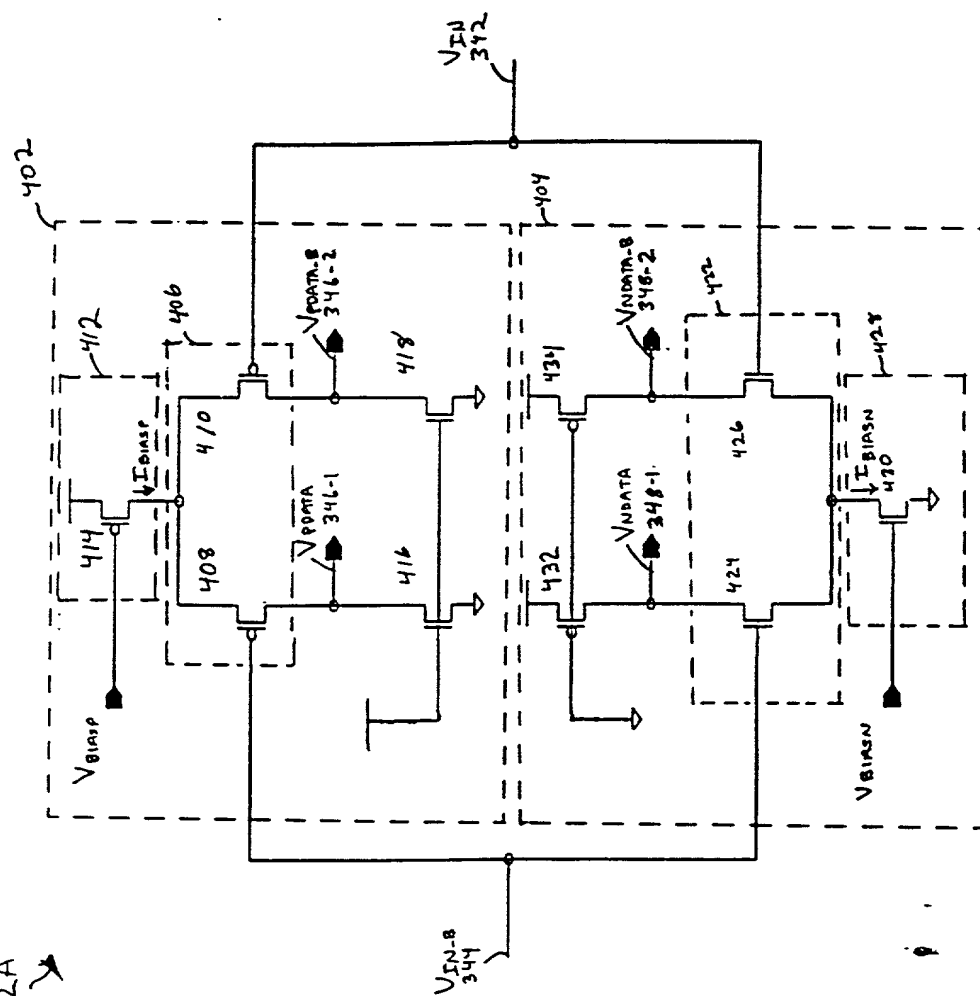


FIG. 10

334A

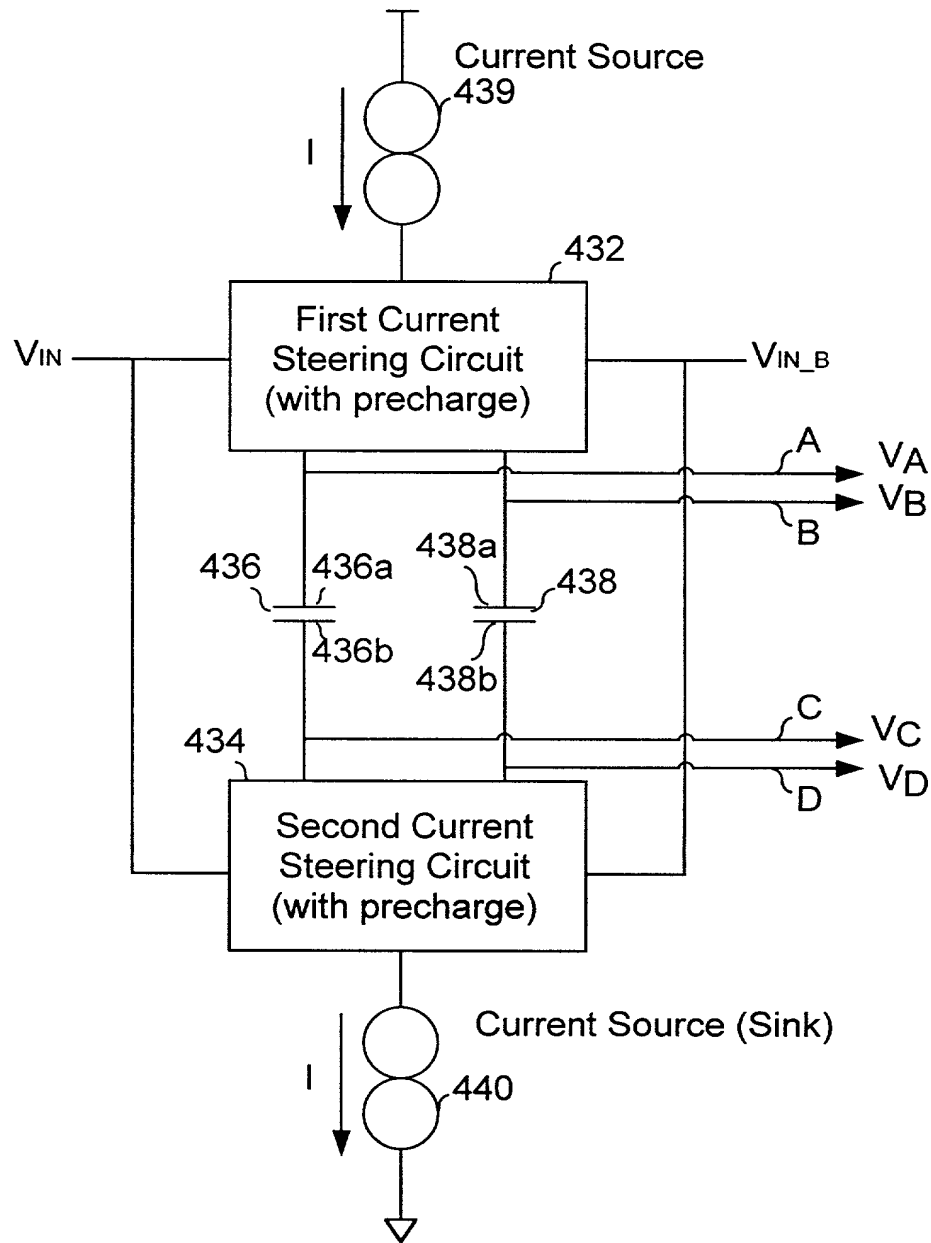


FIG. 11A

Integrator
334B

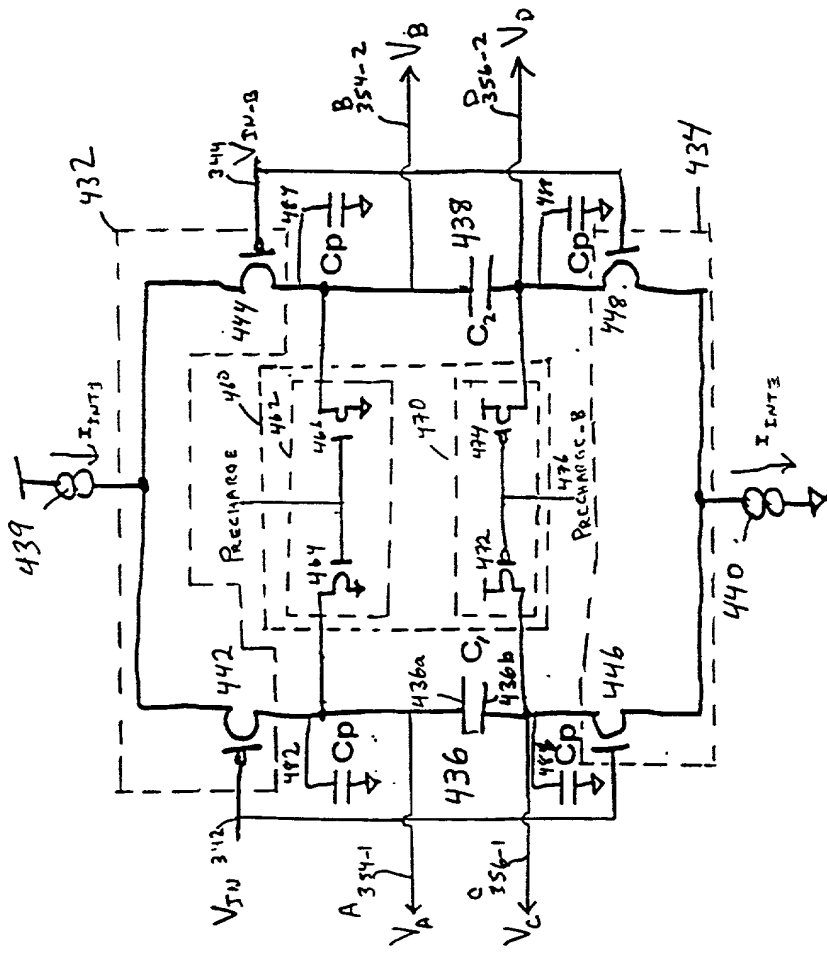


FIG. 11B

Integrator
334C

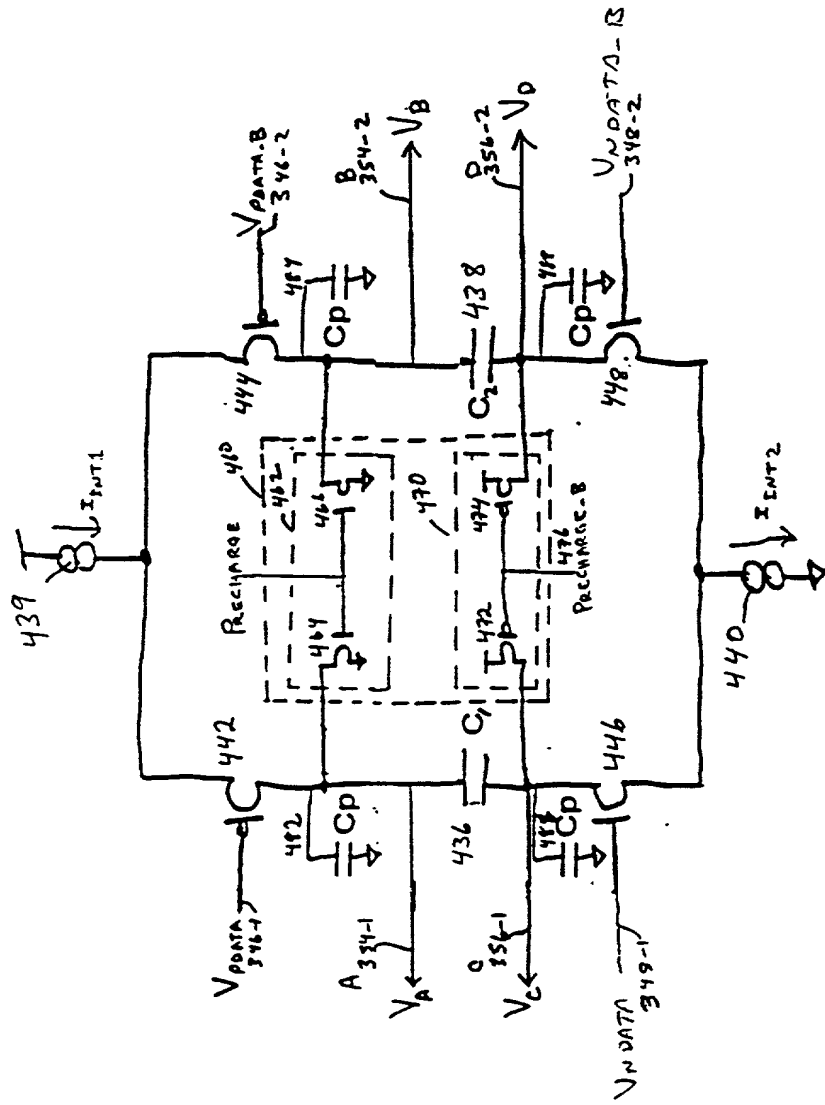


FIG. 11C

INTEGRATOR
334D

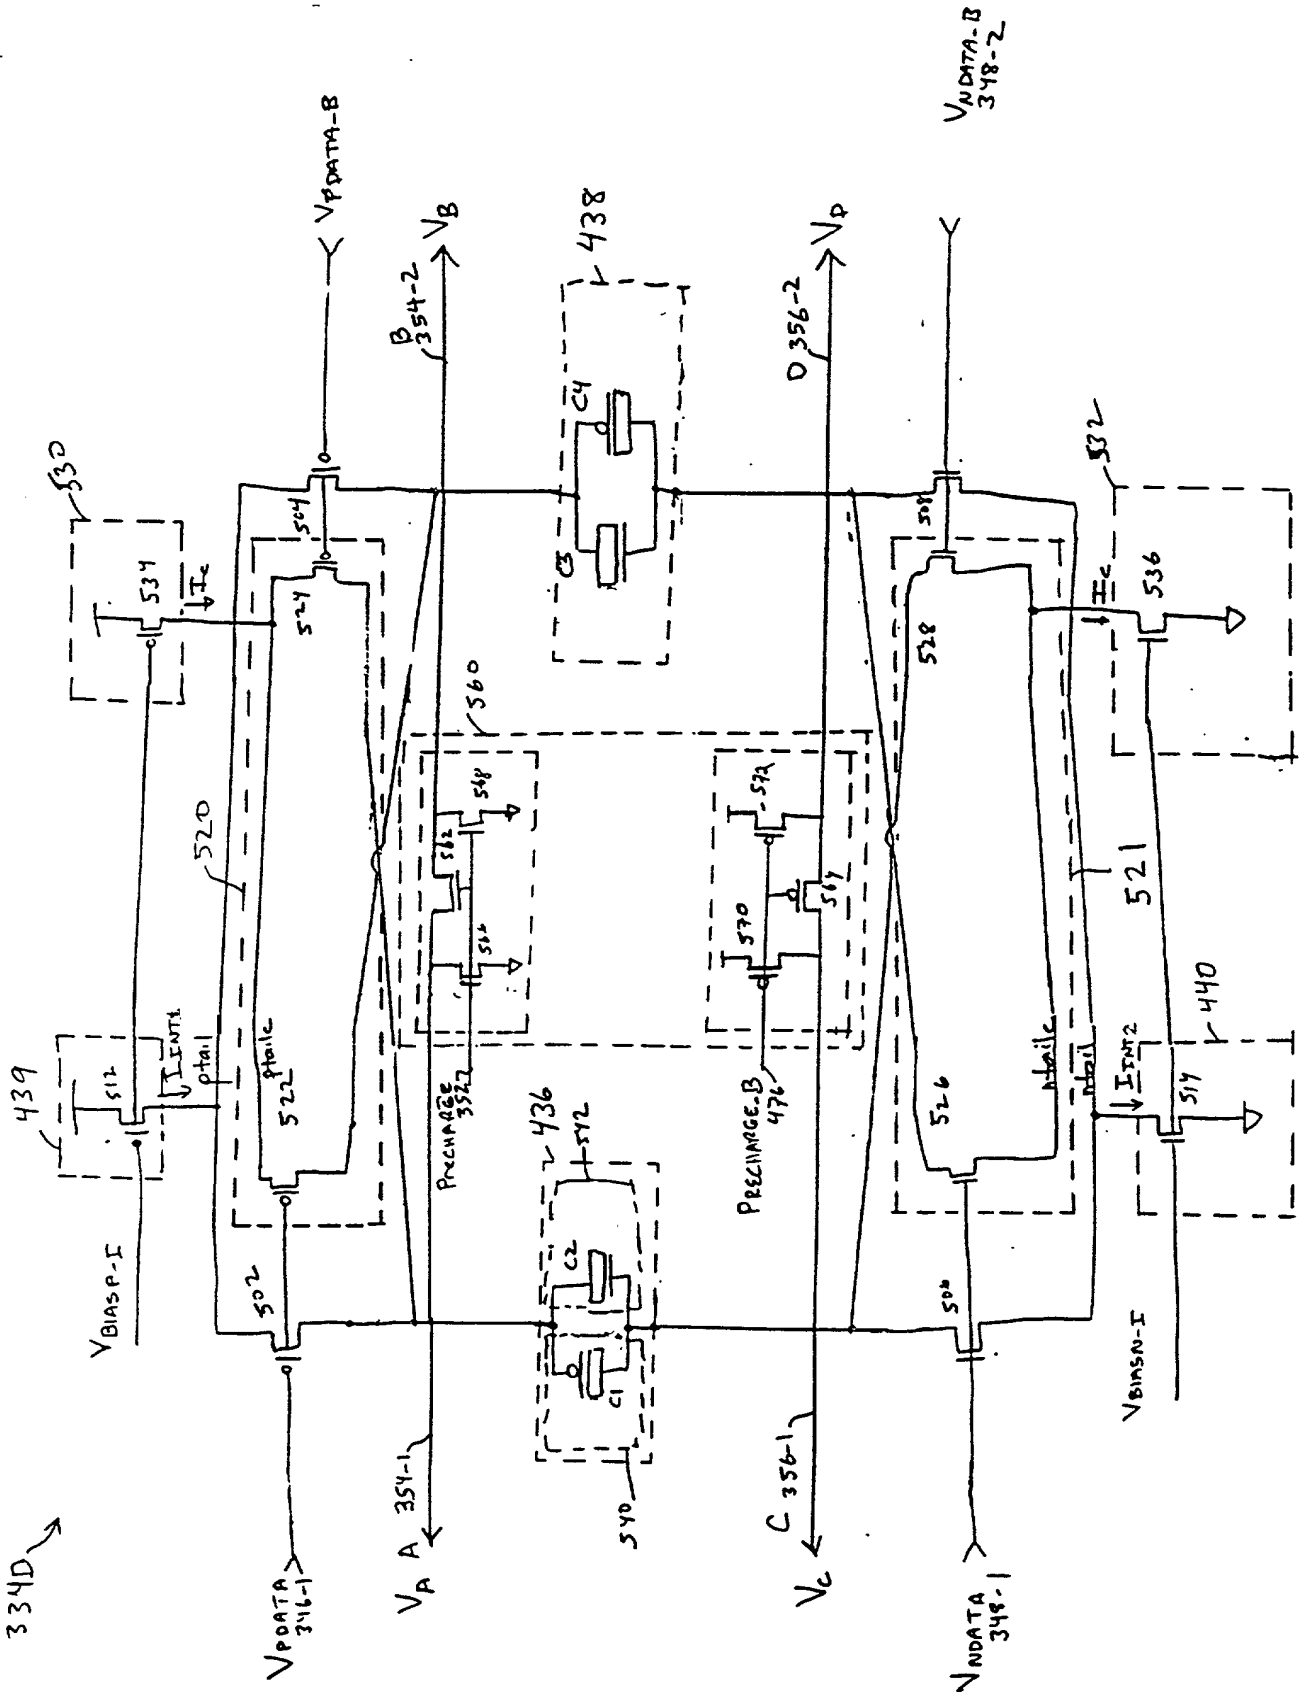


FIG. 12

Integrator
334E →

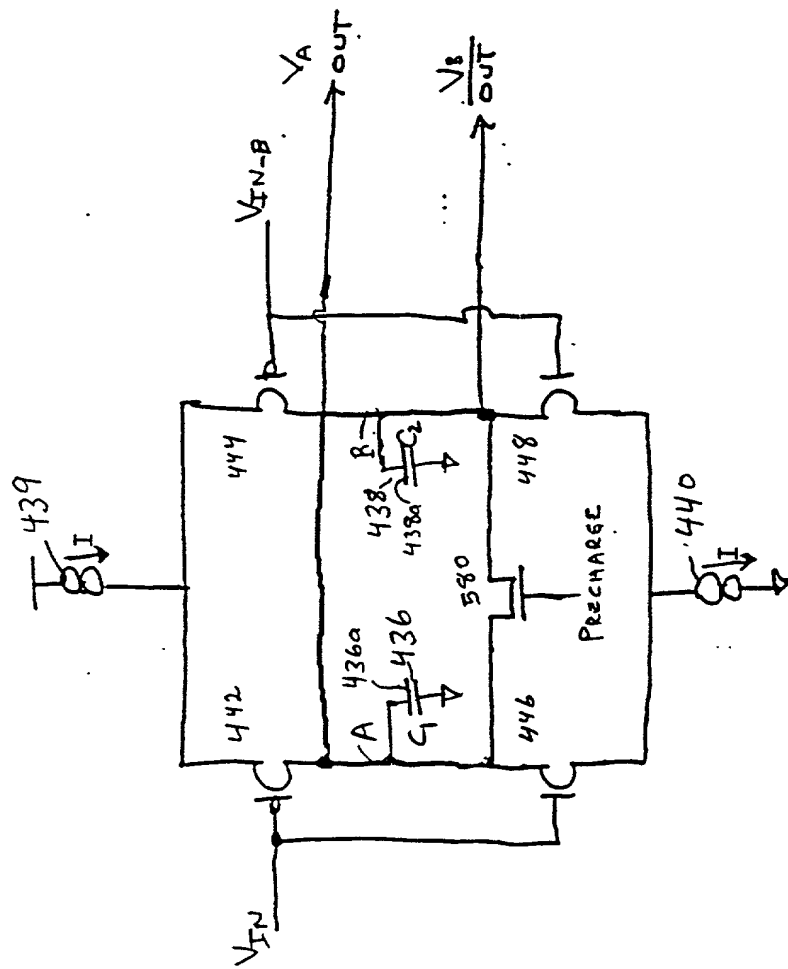


FIG. 13

Sense Amp 1: Fire and Latch
336A

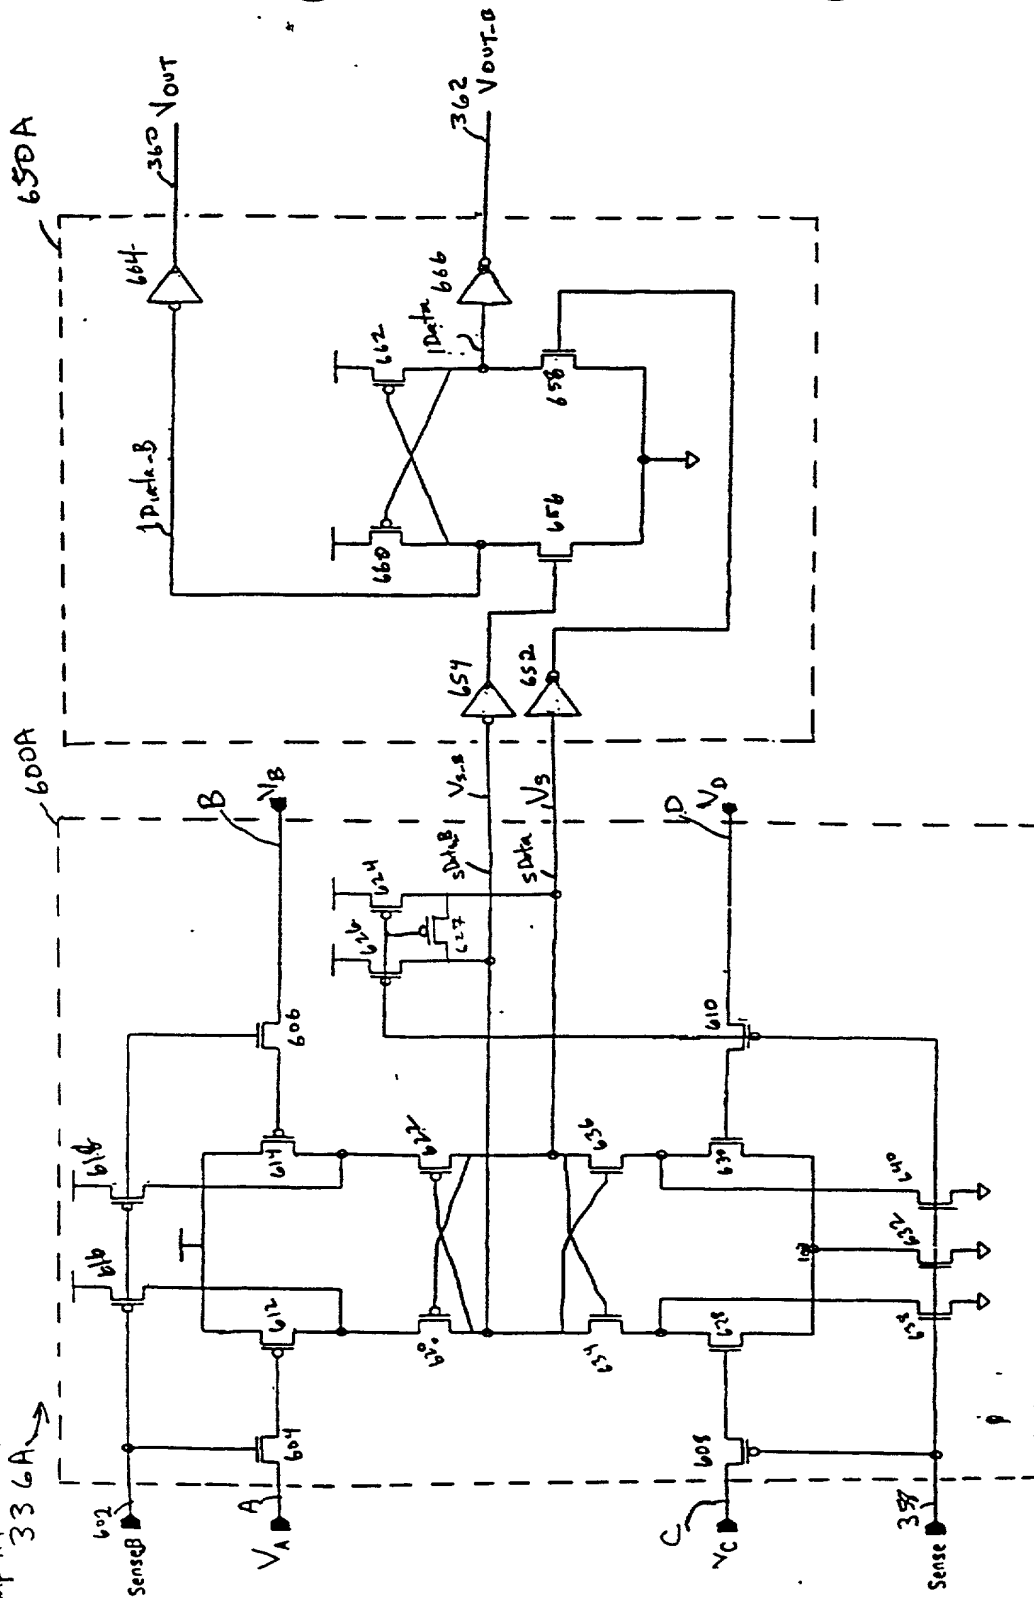


FIG. 14A

Sense Amplifier and Latch
336B

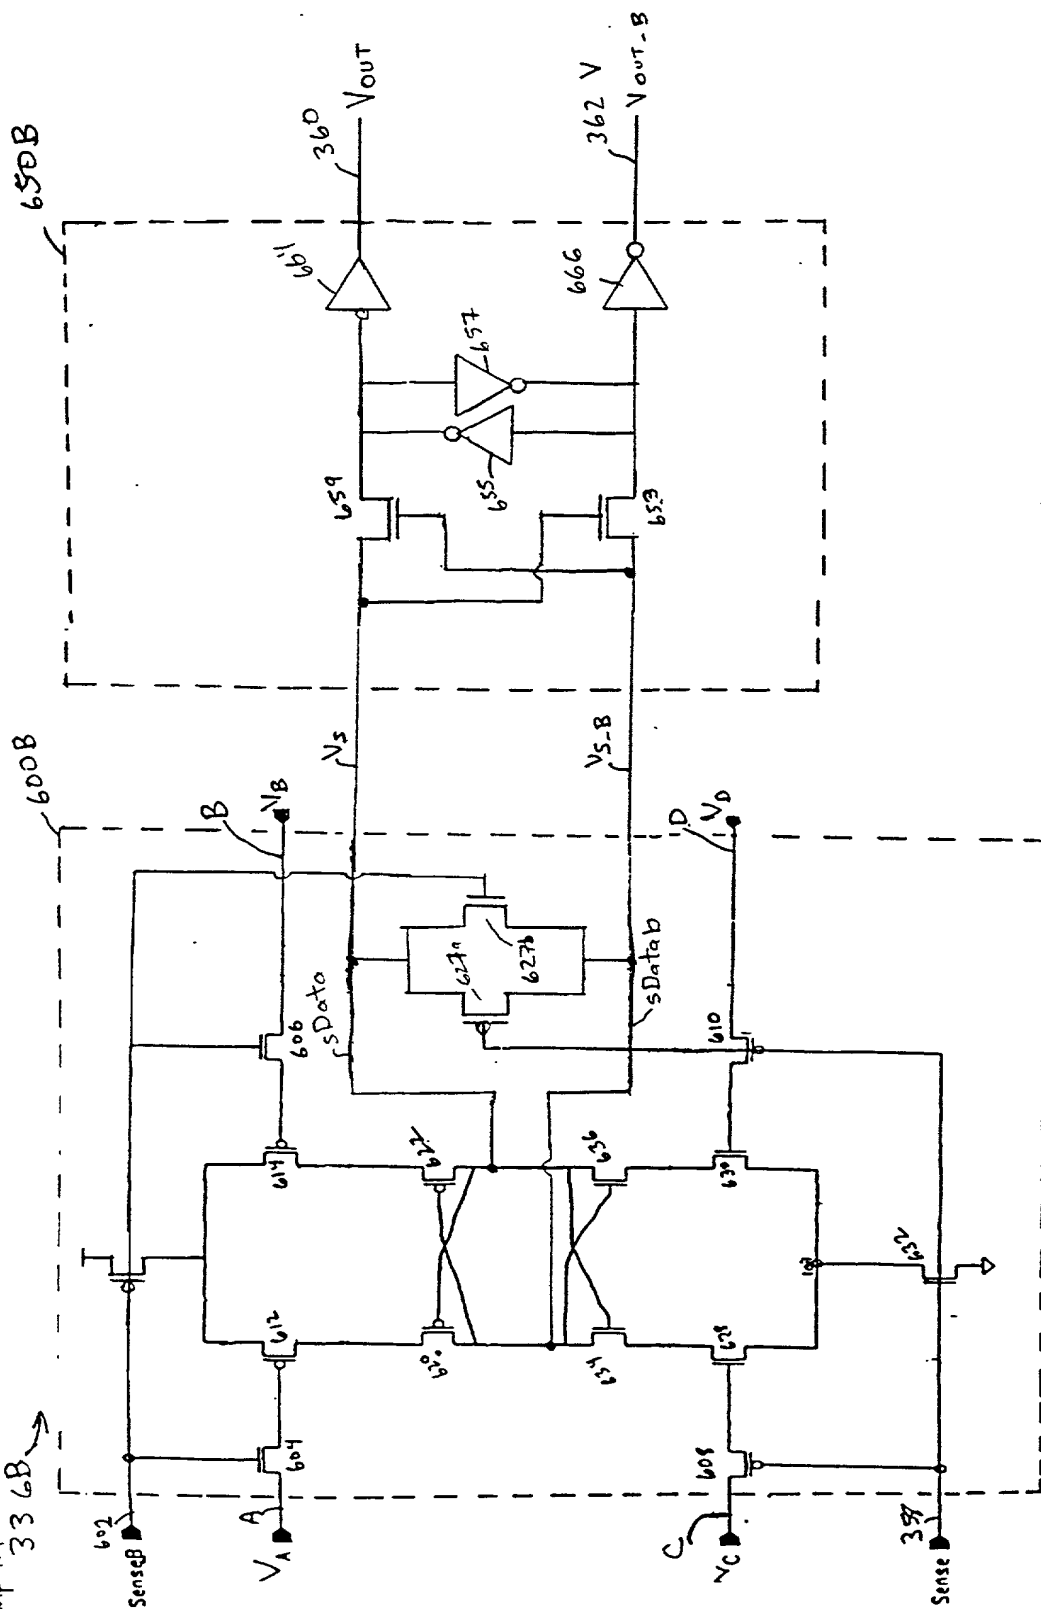


FIG. 14B

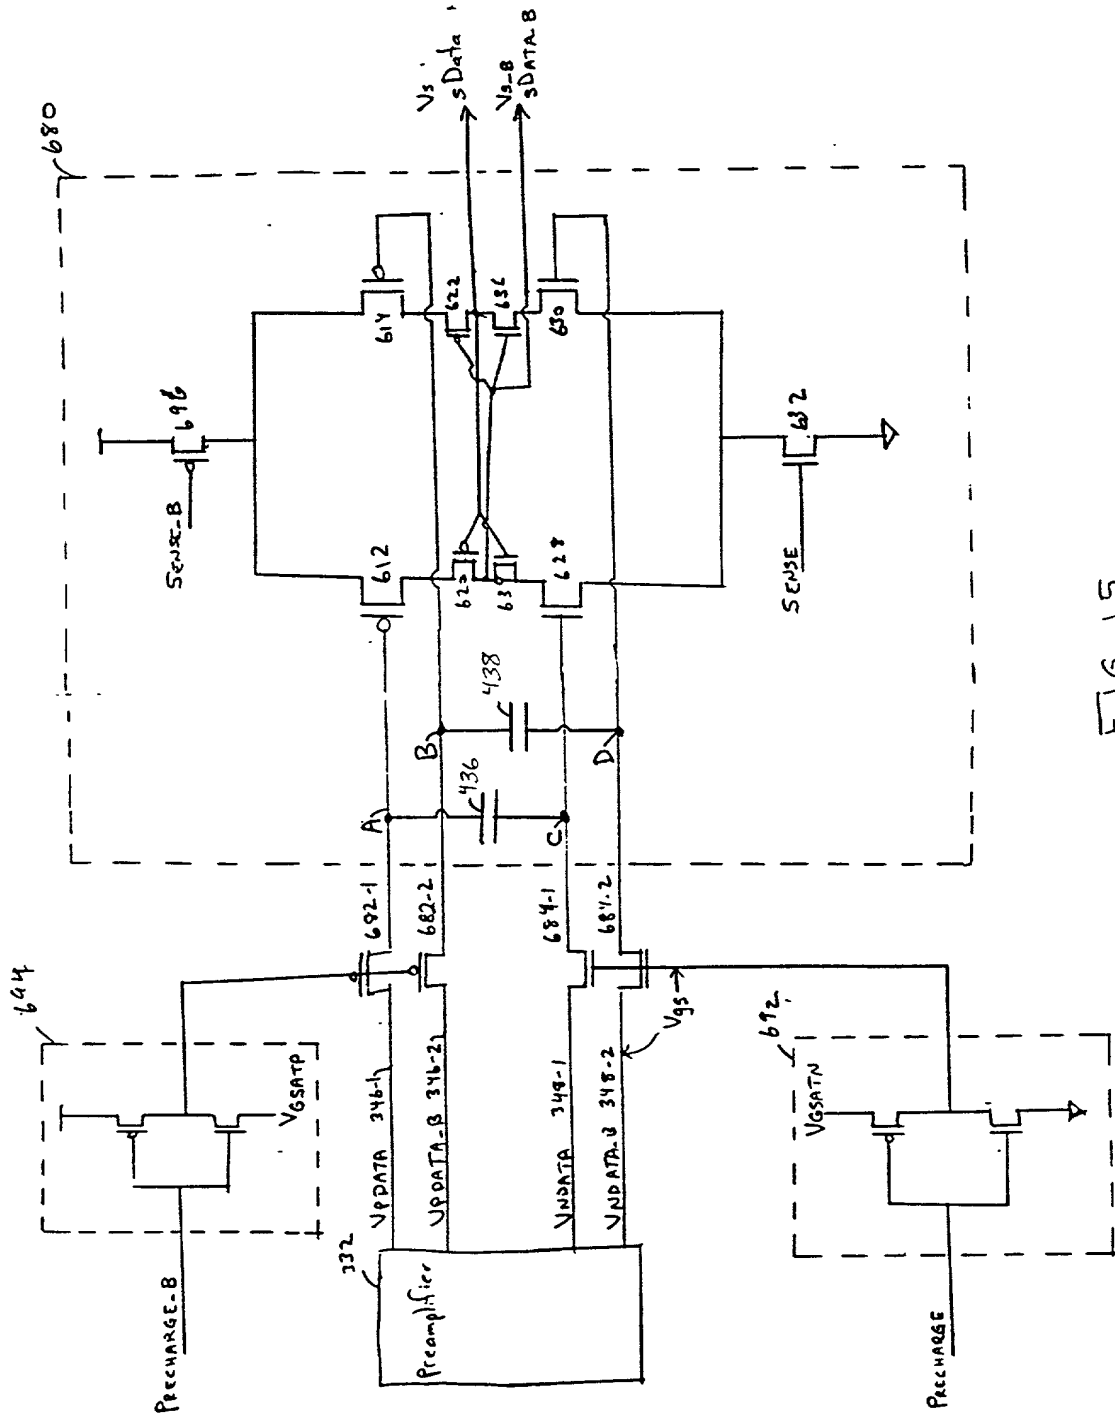


FIG. 15

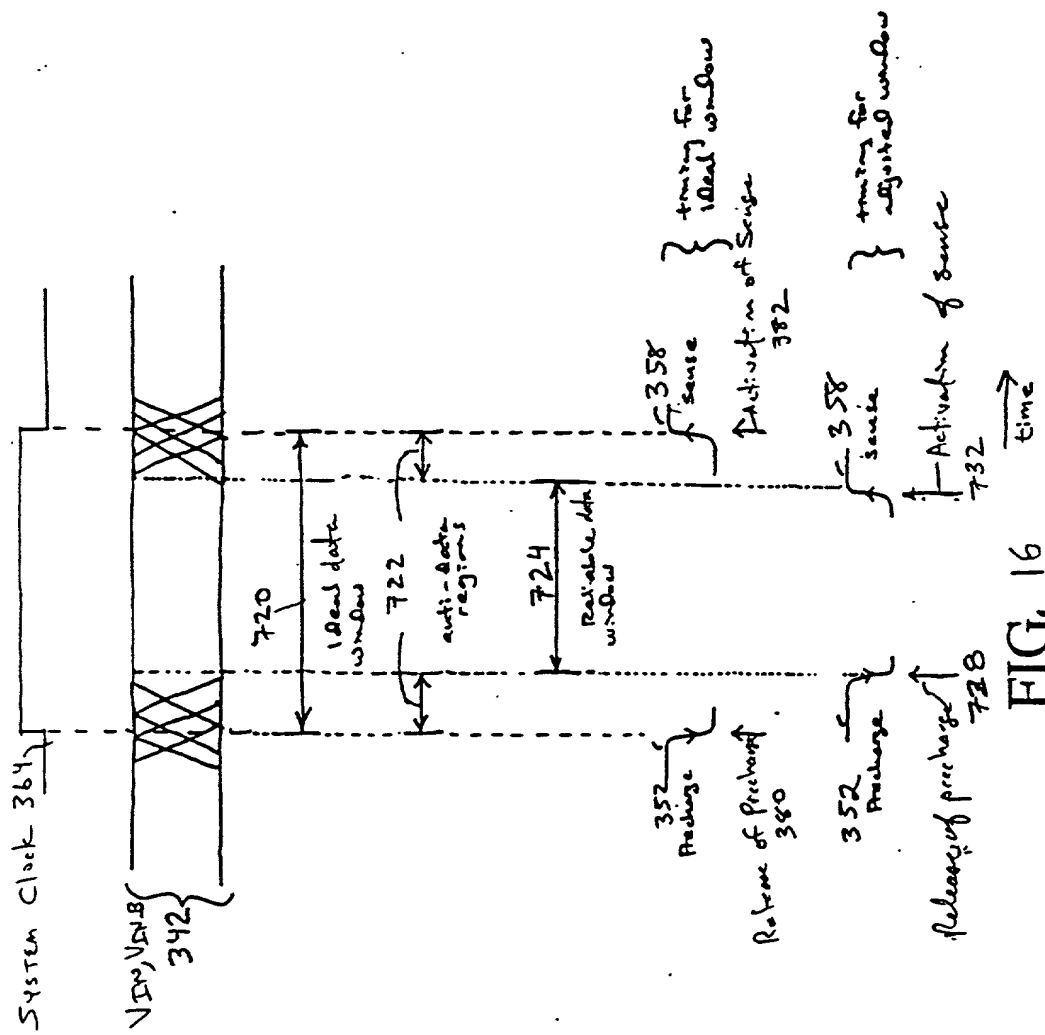


FIG. 16

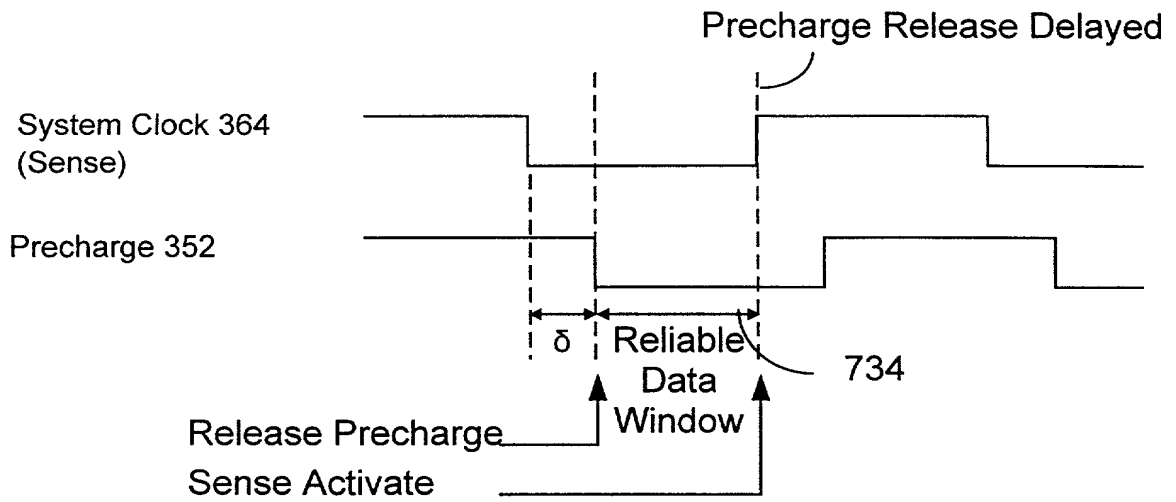


FIG. 17A



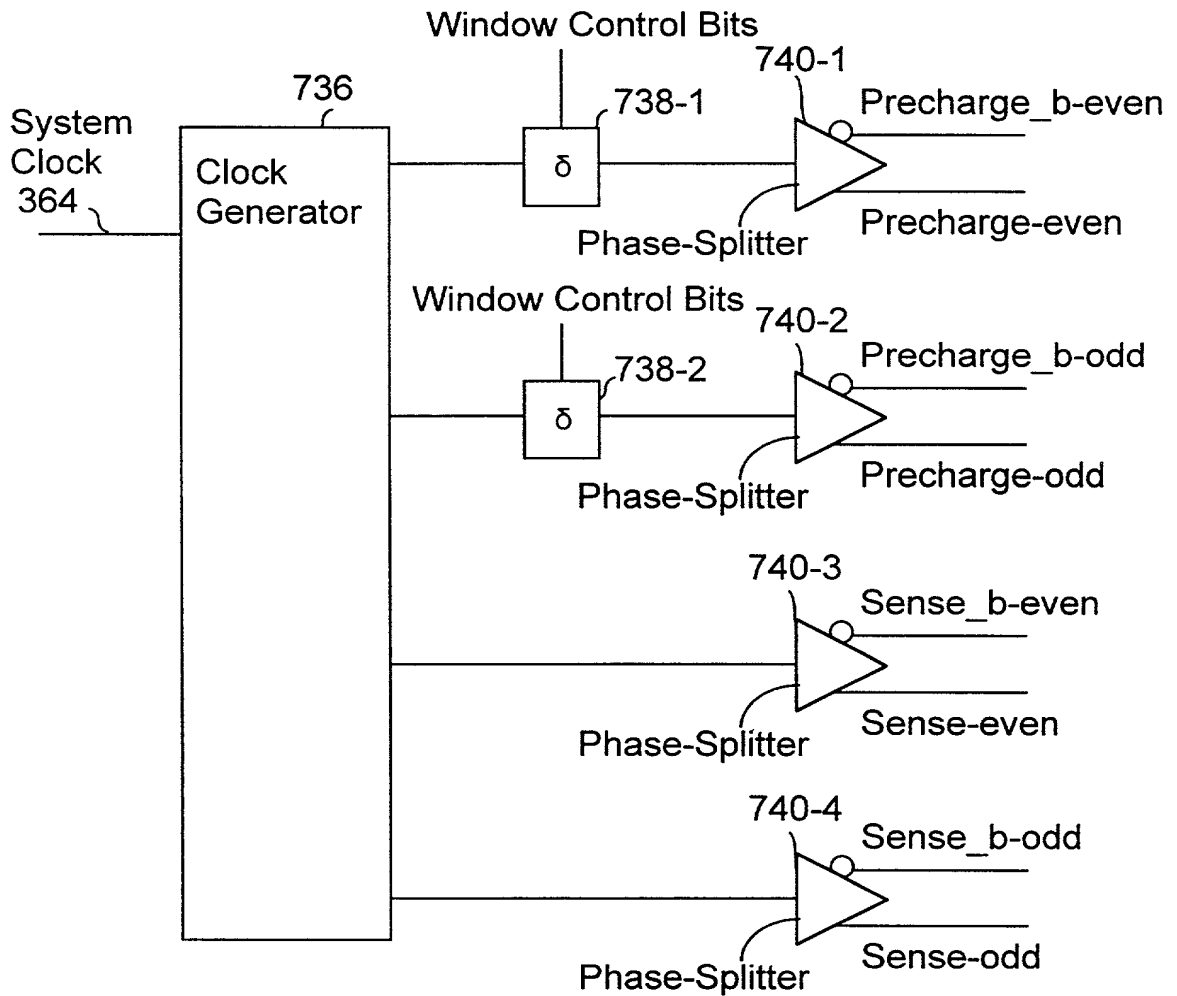


FIG. 17B

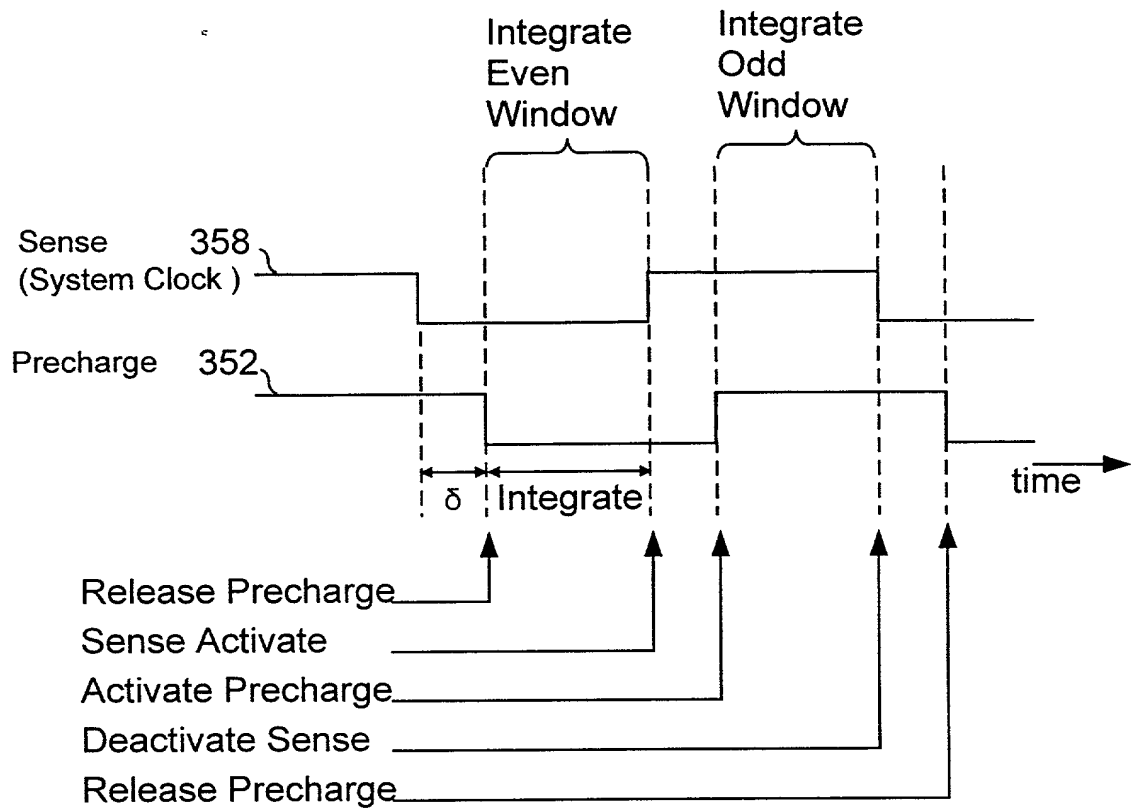

Timing Diagram of Precharge and Sense Signals

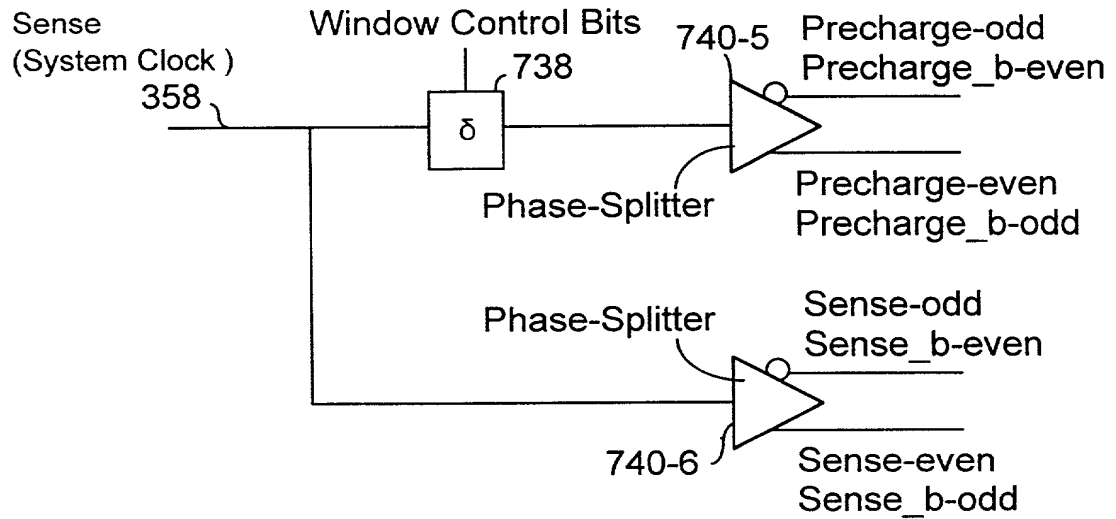FIG. 17C



Circuit for Timing Diagram of Fig. 17C

FIG. 17D

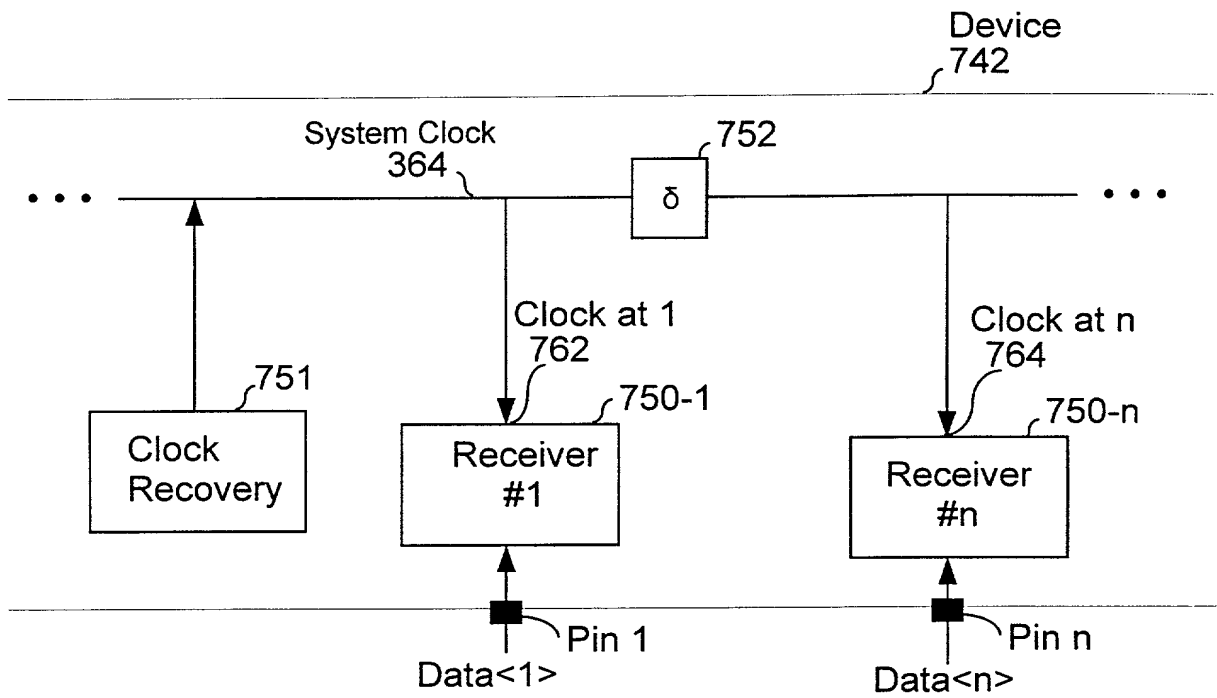


FIG. 18

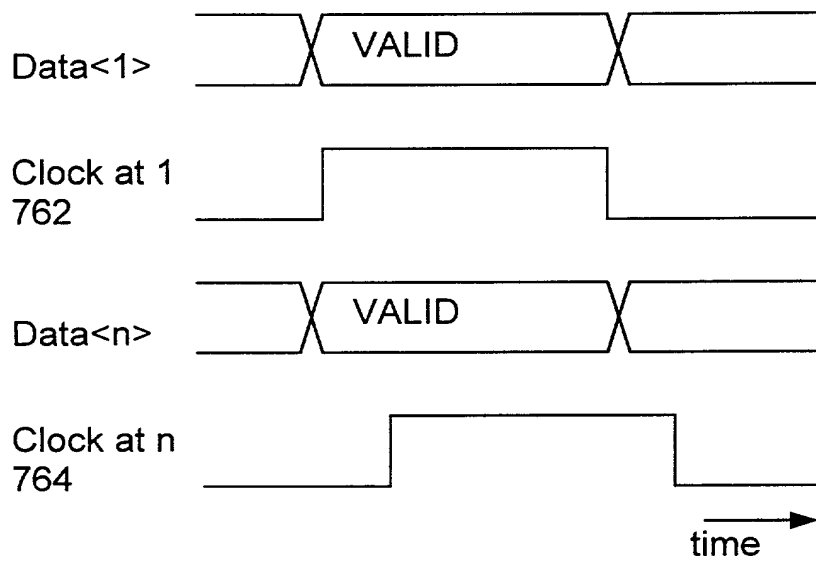


FIG. 19

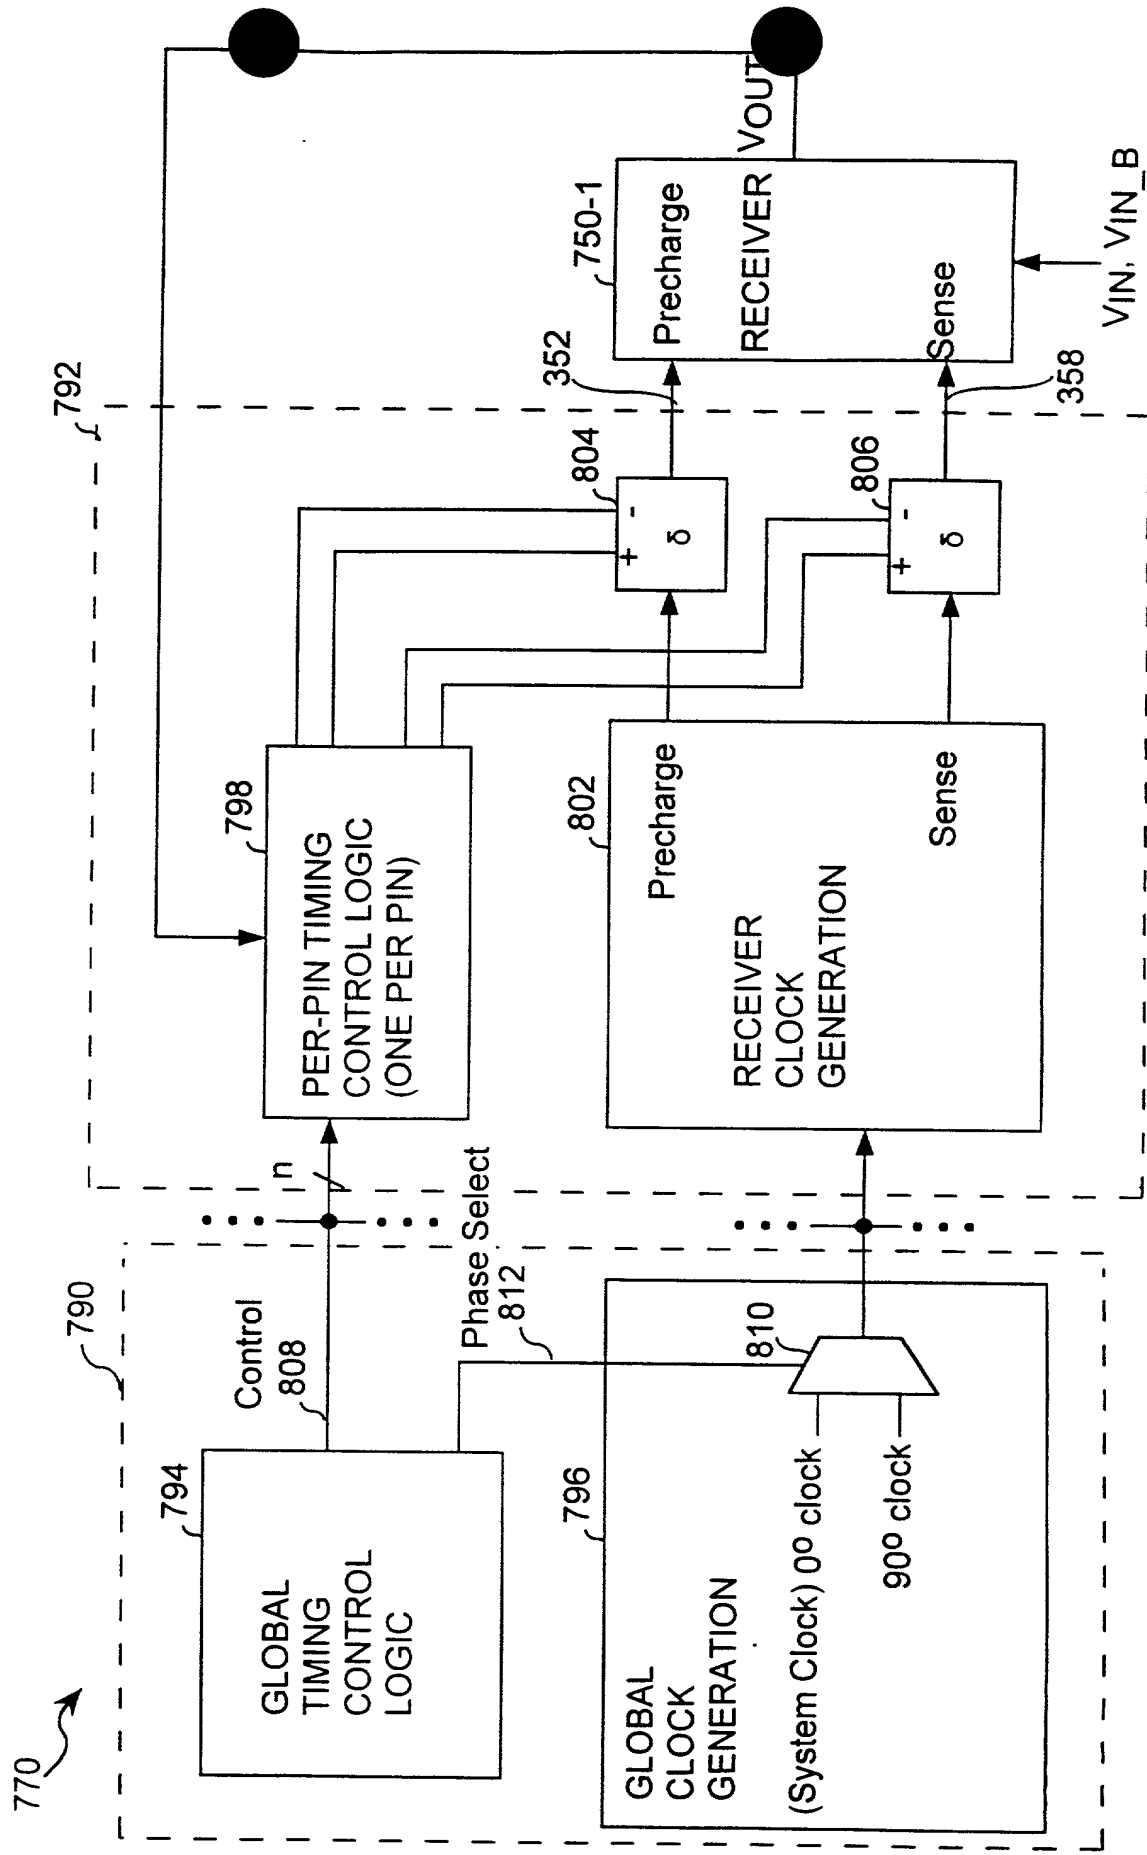


FIG. 20

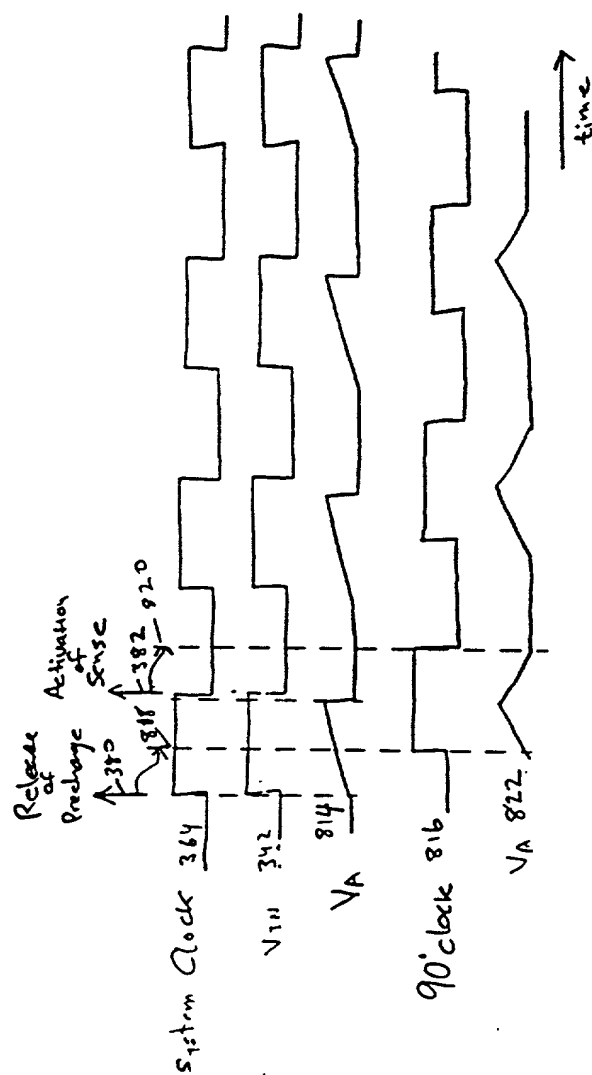


FIG. 21

804 ↗

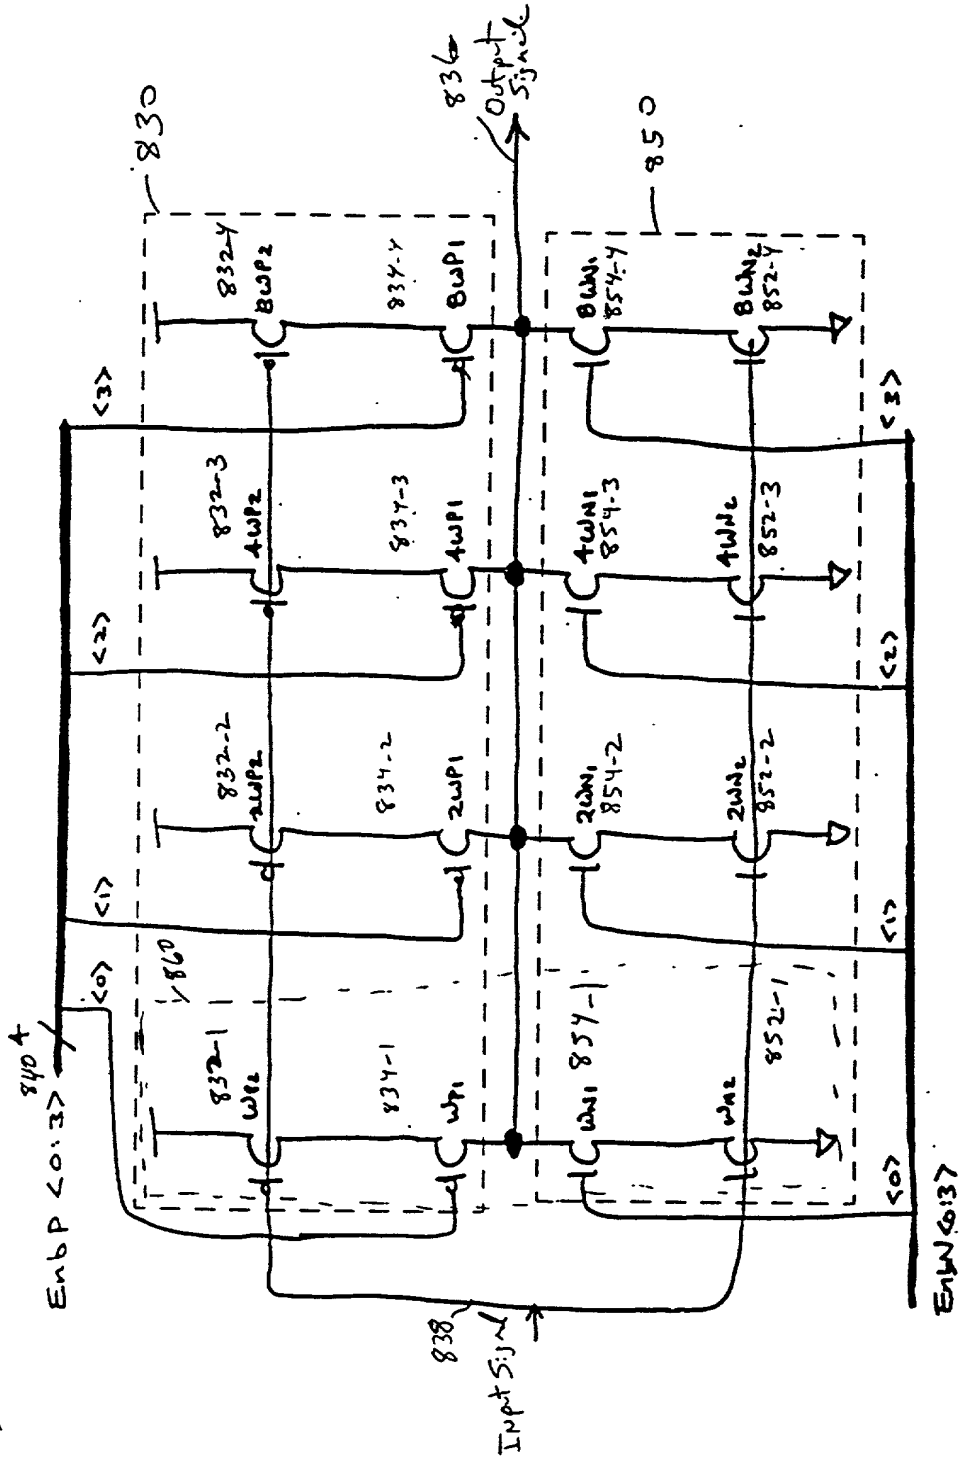


FIG. 22


[illegible]

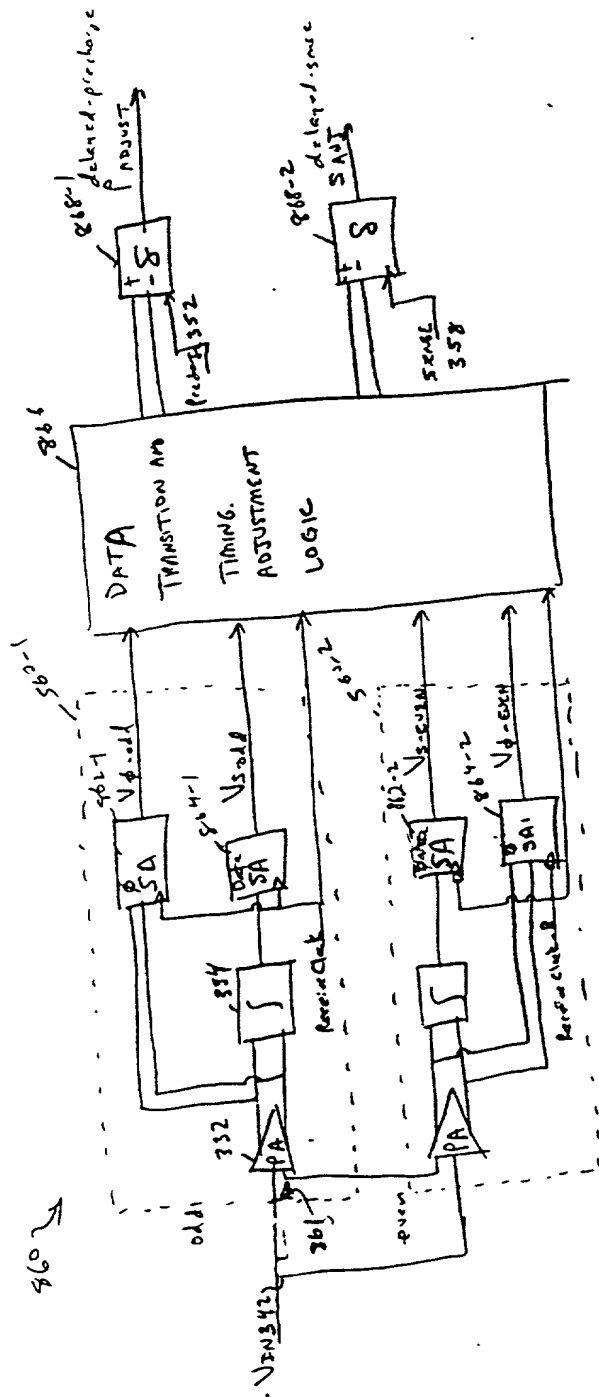FIG. 23 A

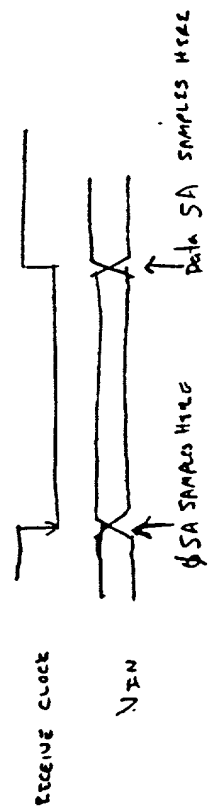


Fig. 23 B

870 →

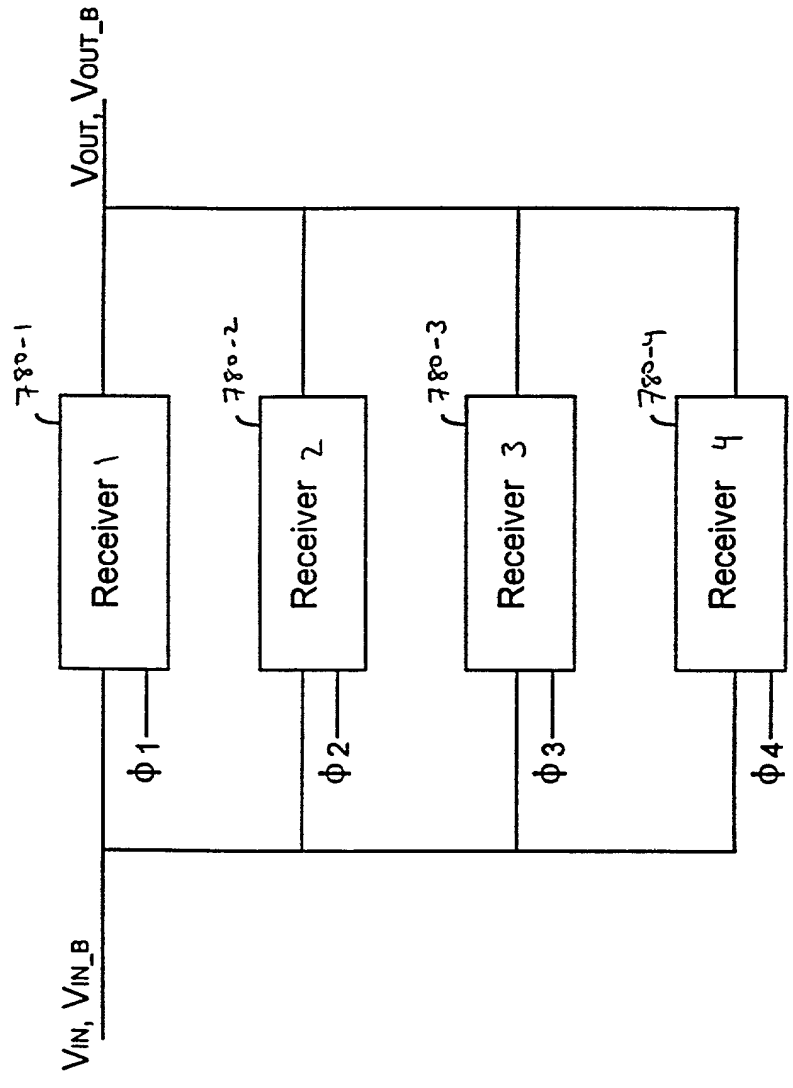


FIG 24

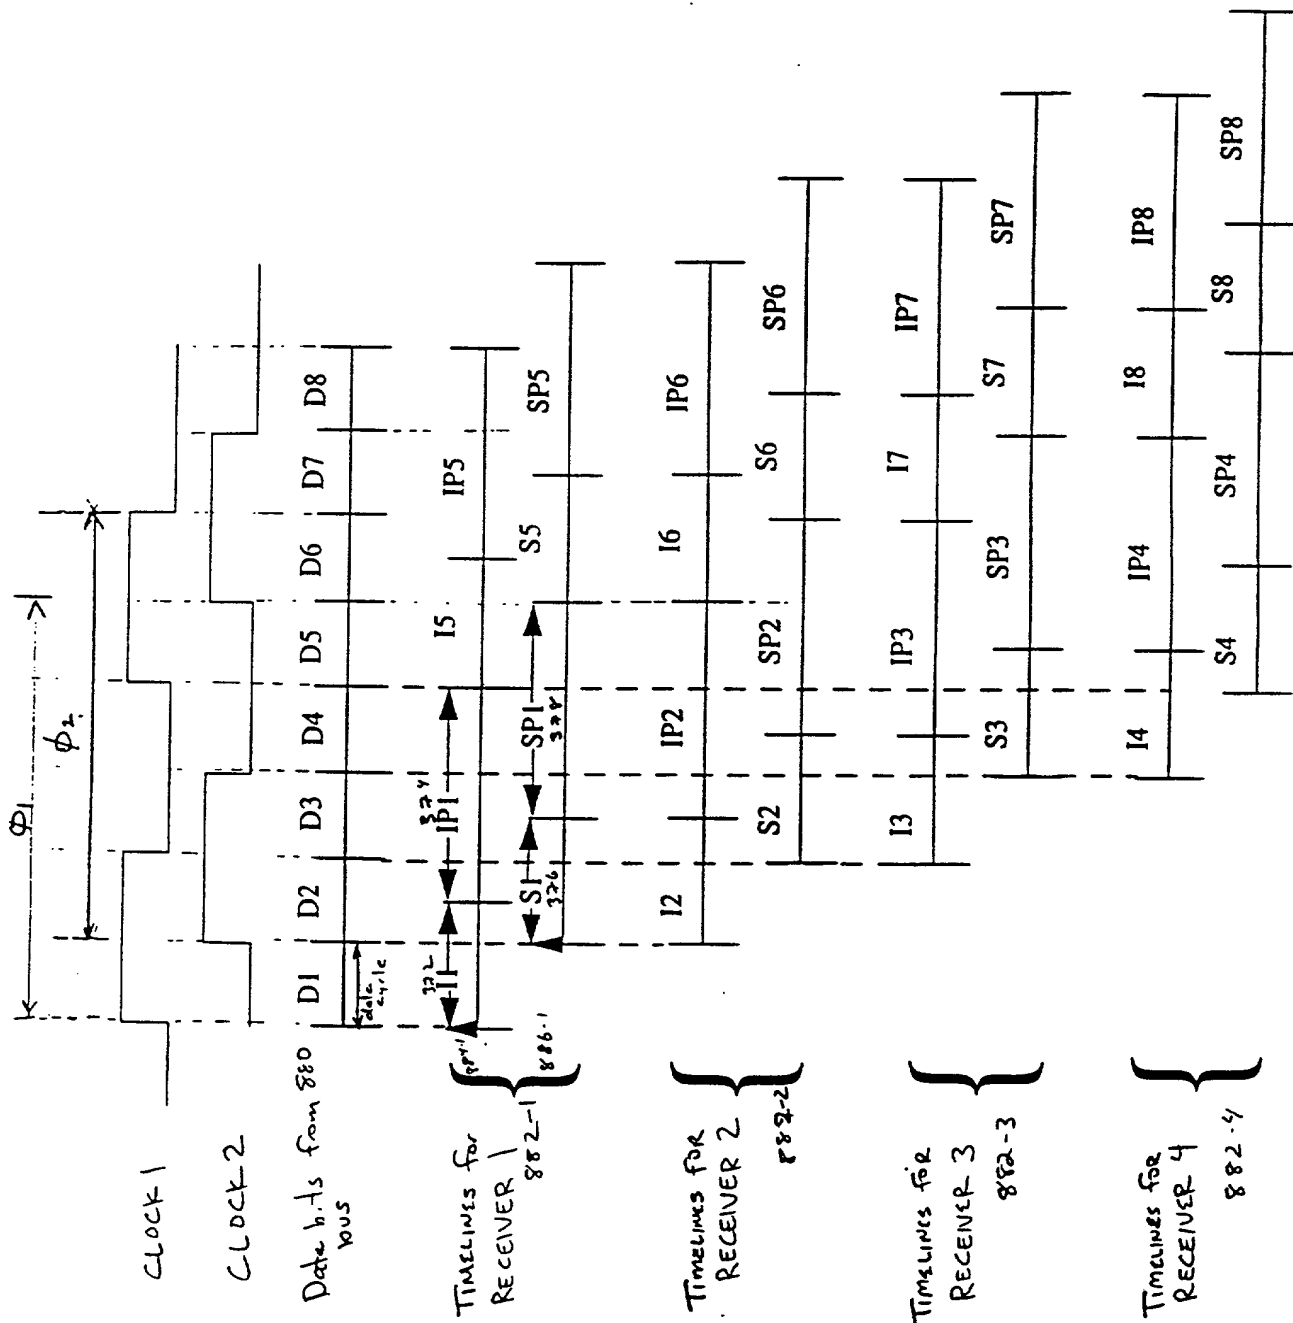


FIG. 25

time


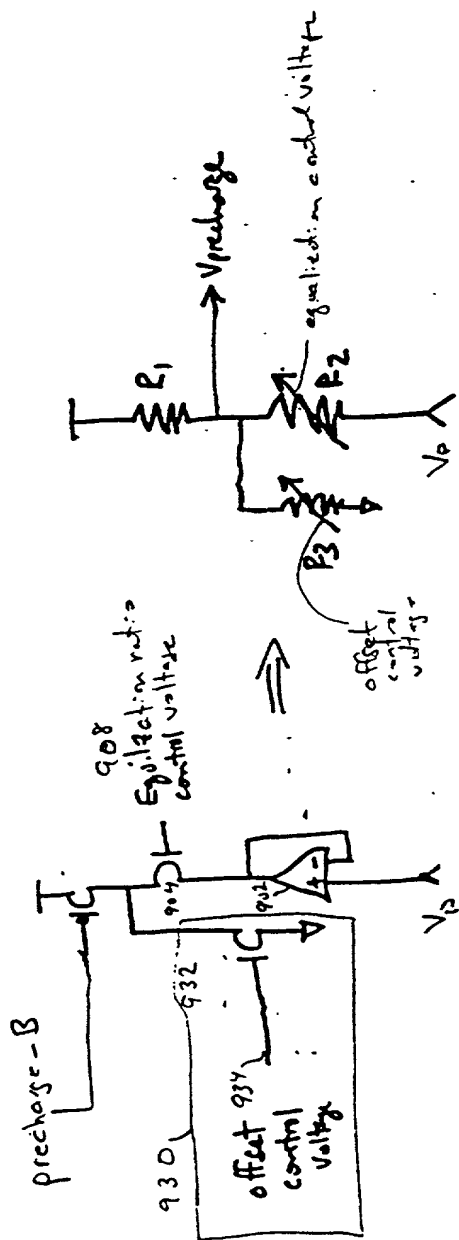
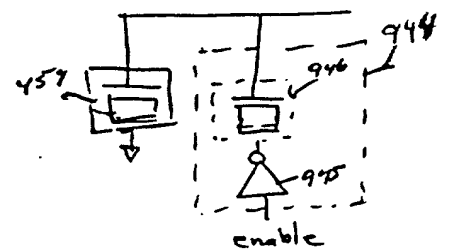
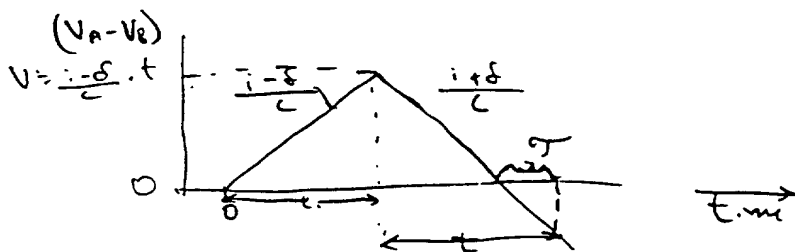
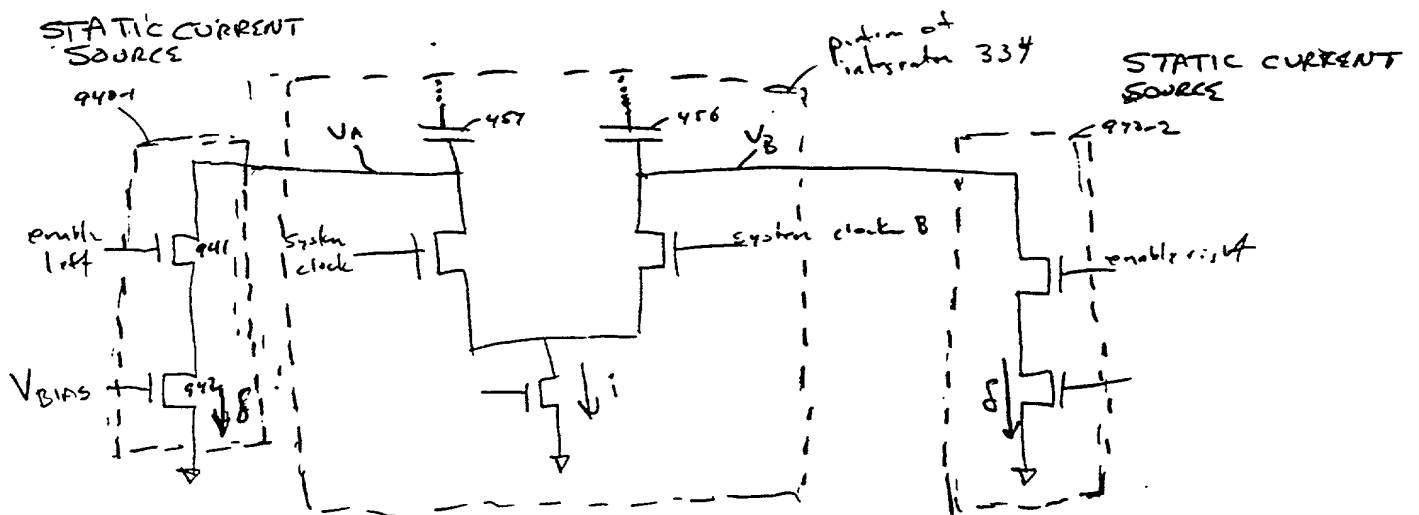


FIG. 27A

FIG. 27B

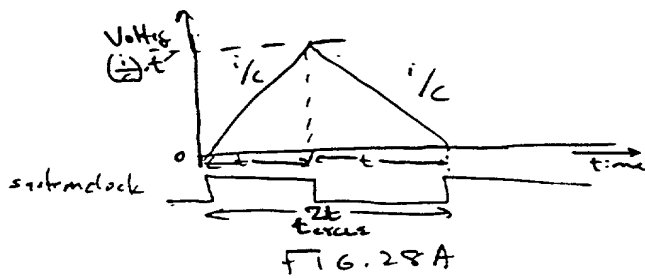

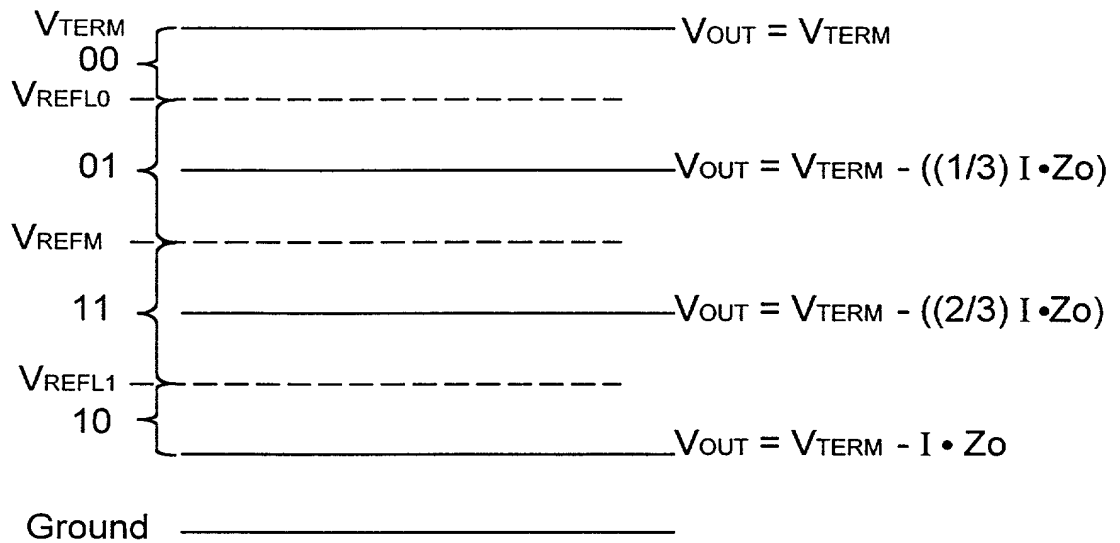


FIG. 29

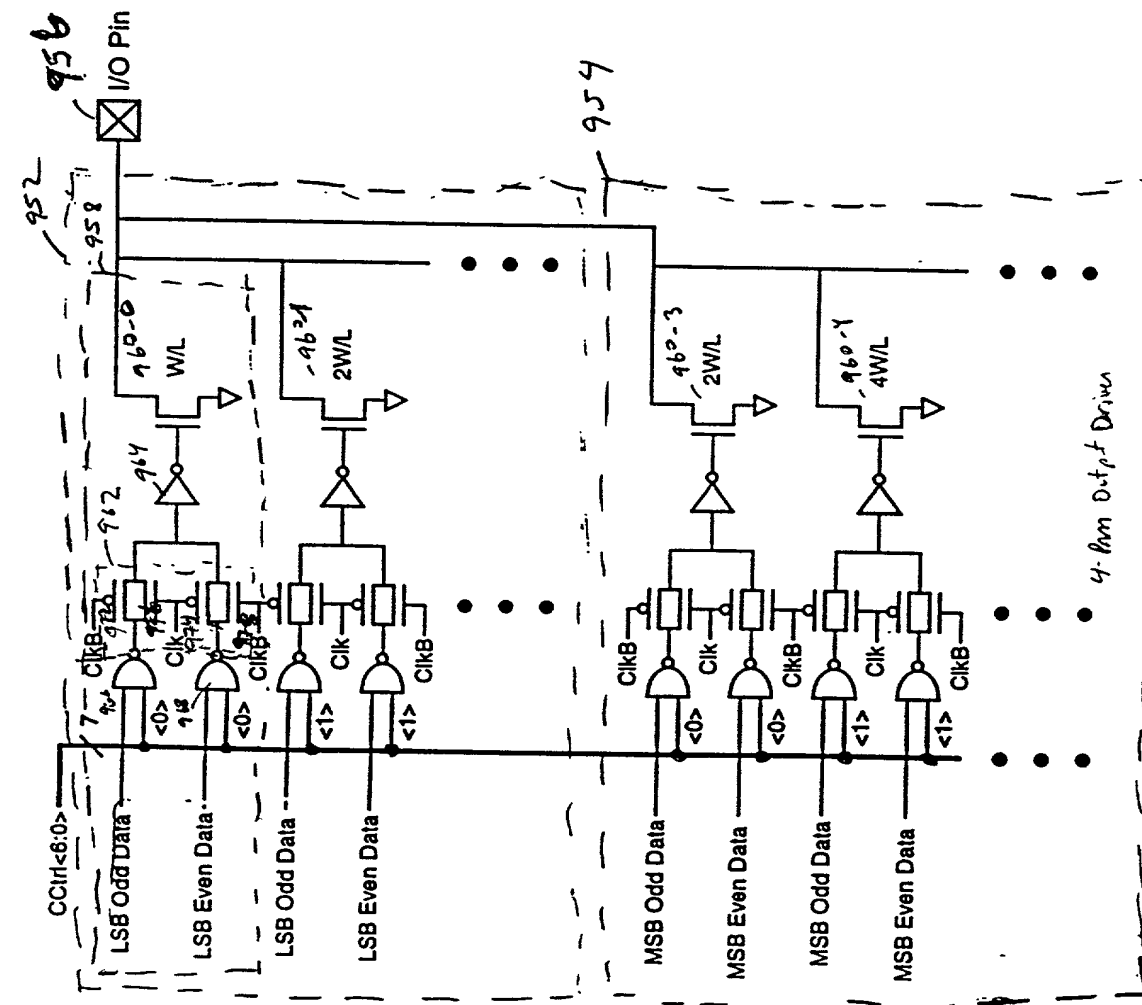


FIG. 30

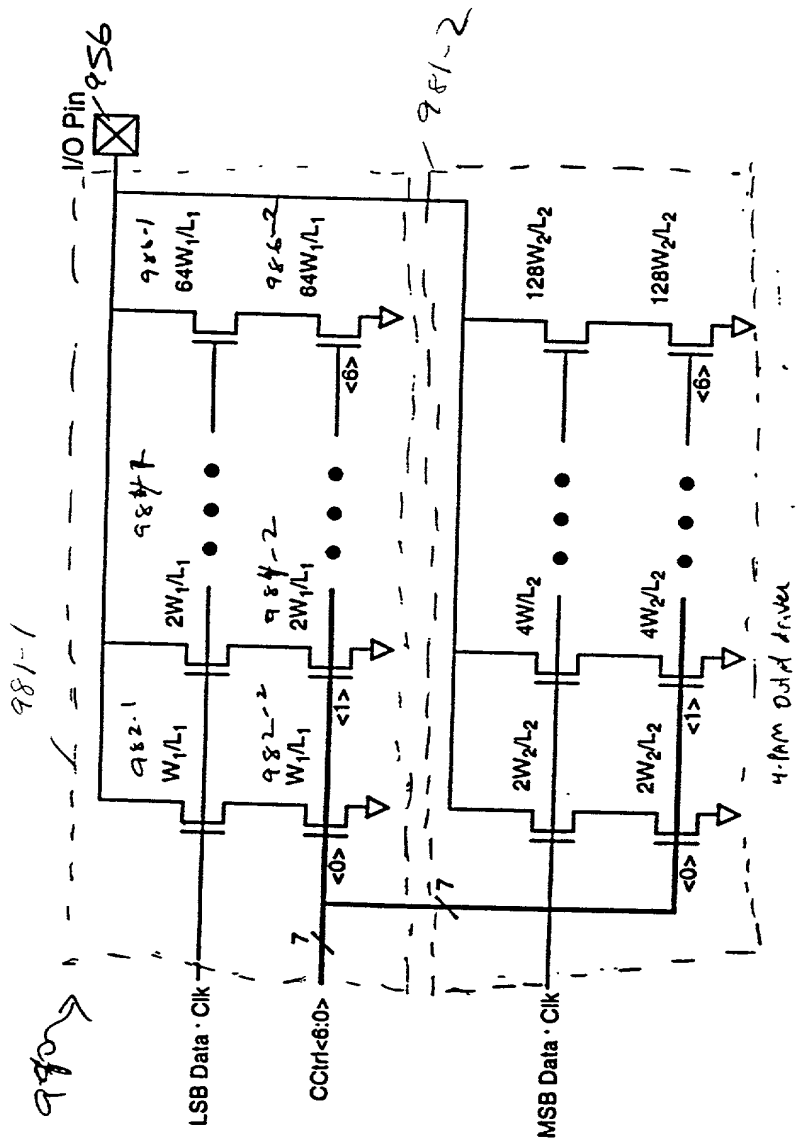


FIG 31

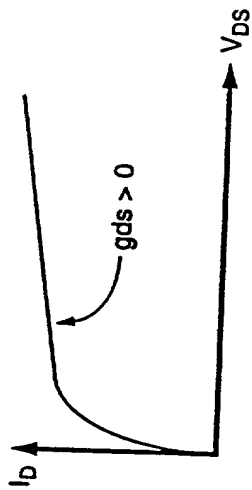


FIG 32A




FIG. 32B




FIG. 32C



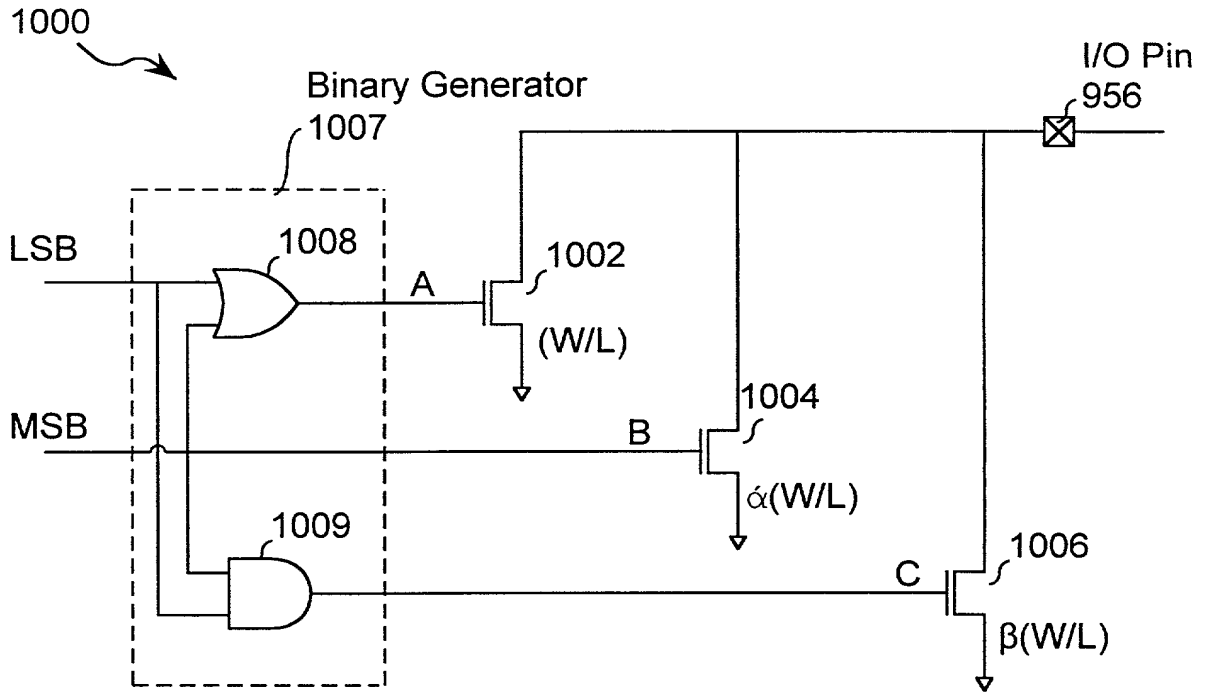


FIG. 33A

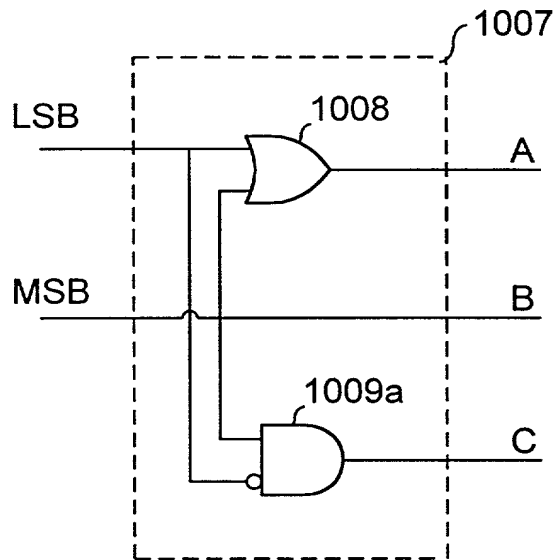

Gray Code Generator

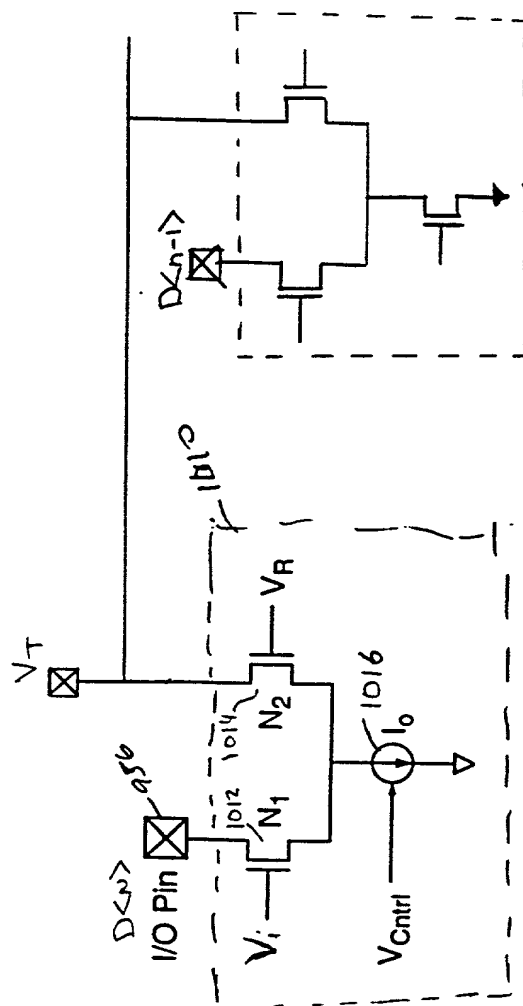FIG. 33B



circuit to reduce switching Noise

16.34.



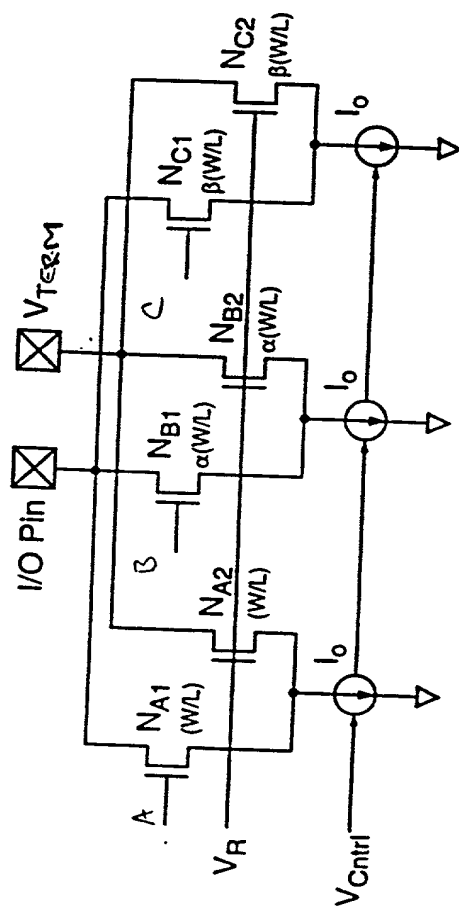



FIG. 35

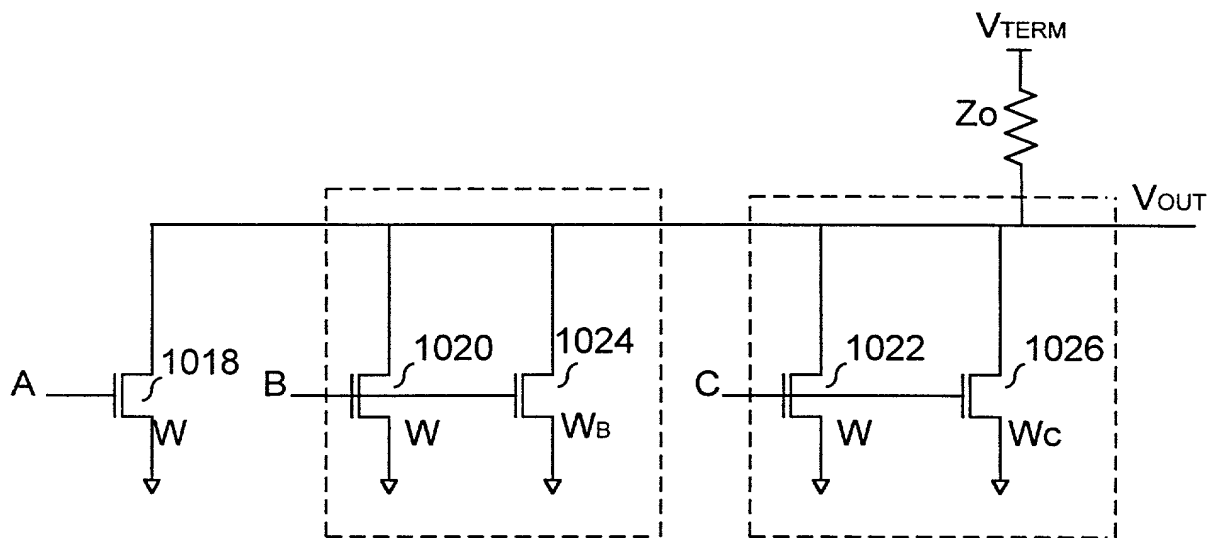

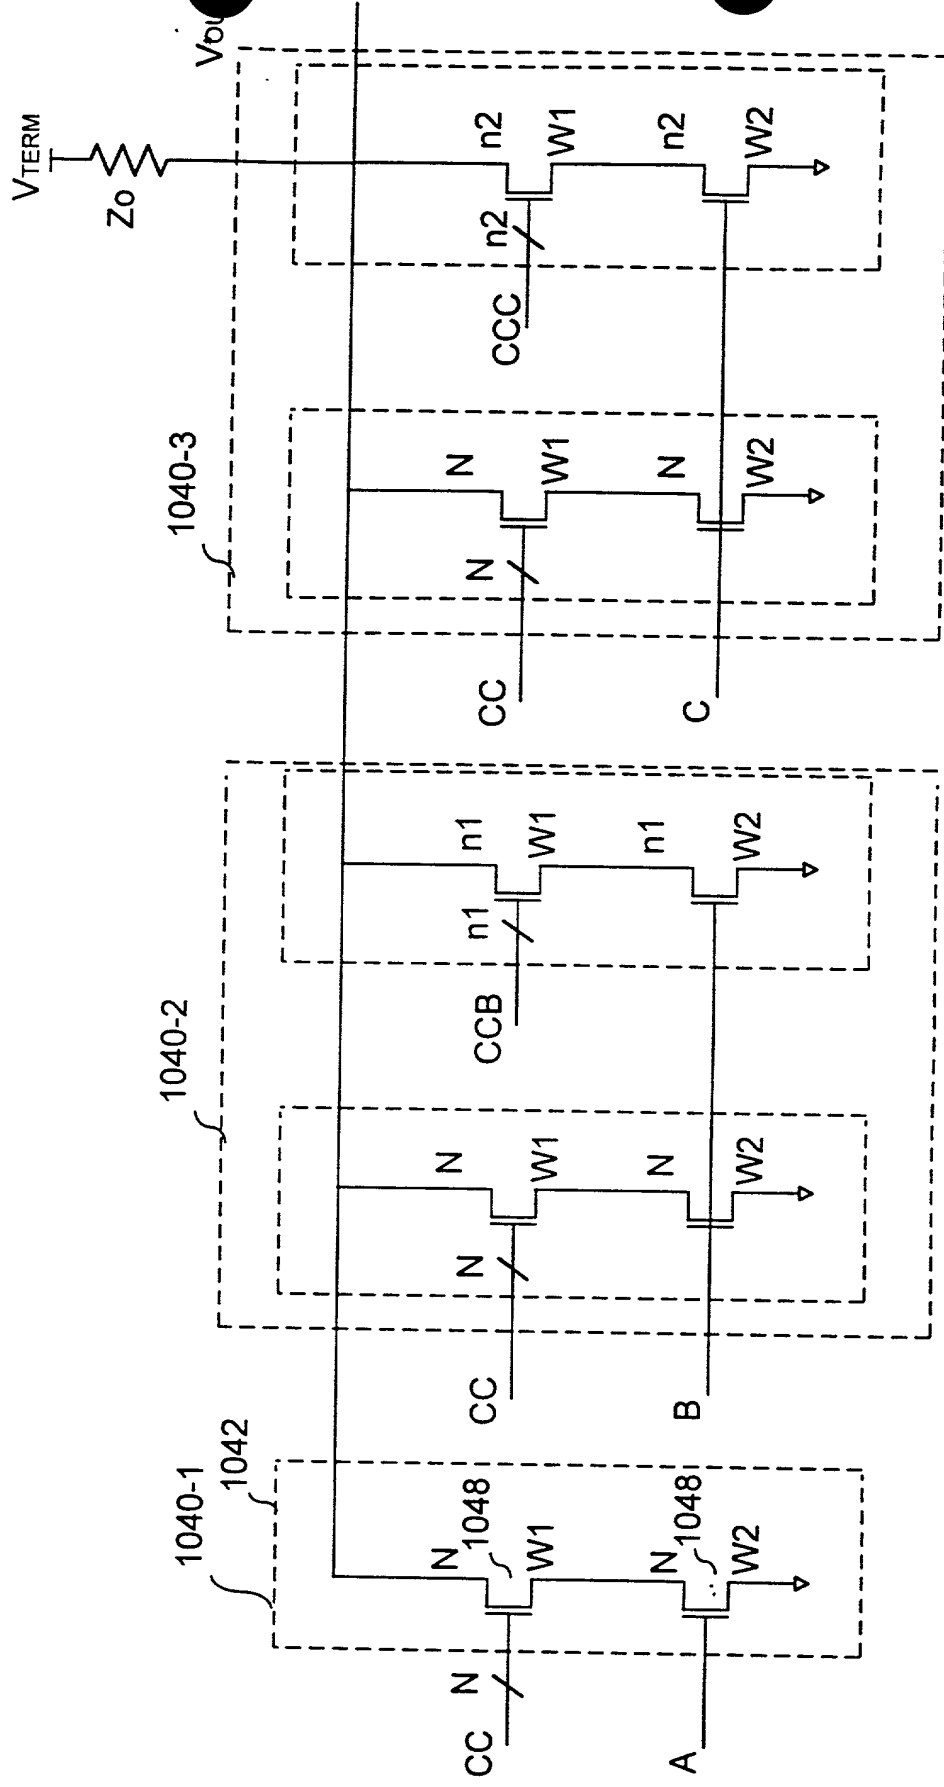GDS Compensated Multi-PAM Output Driver
FIG. 36



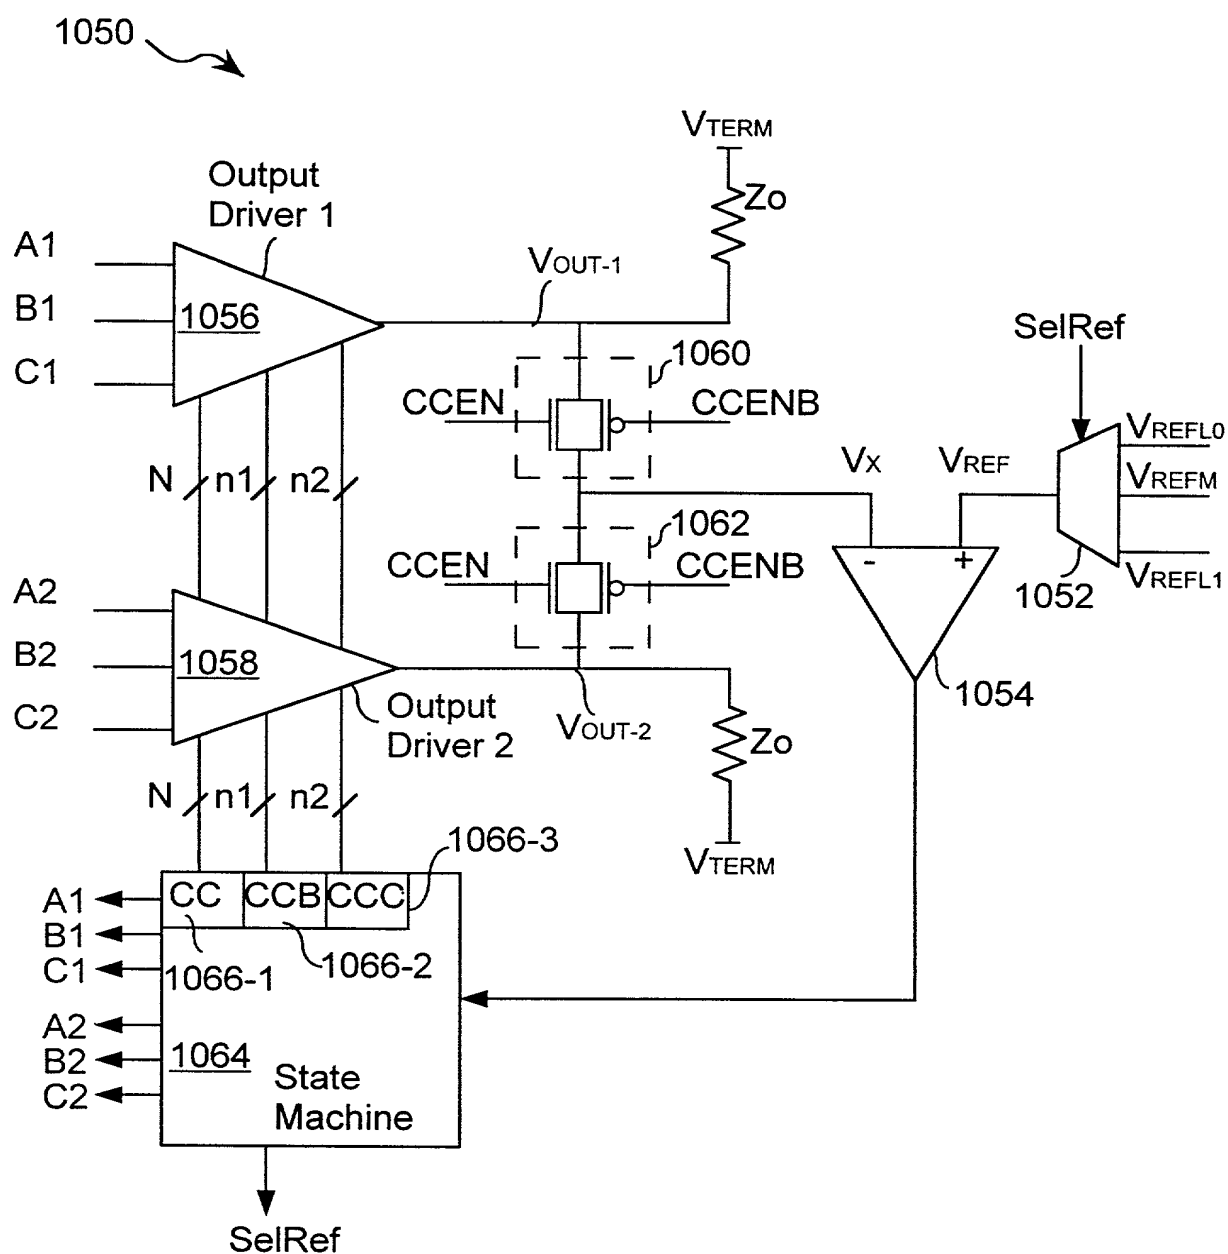GDS Compensated Multi-PAM Output Driver with Current Control
FIG. 37A



Circuit for Calibrating the GDS Compensated Output Driver with Current Control

FIG. 38

Set Current Control Enable bits (CCEN and CCENB) to activate the passgate pairs.	1070
	10

```
Select VREF = VREFLO;  
Set A1=B1=C1=0, A2=1, B2=C2=0; and  
CC=100...0, CCB=100...0, CCC=100...0.
```

Generate midpoint voltage V_x .

Does $V_x = V_{REF}$
(Within 1 LSB)

Augment the CC code based on the comparison.

Select $V_{REF} = V_{REFM}$;
Set $A1=1$, $B1=C1=0$, $A2=B2=1$, $C2=0$; and
 $CC=UNCHANGED$, $CCB=100...0$, $CCC=100...0$.


Generate midpoint voltage V_x .¹⁰⁸⁸

Does $V_x = V_{REF}$
(Within 1 LSB)

Augment the CCB code based on the comparison.


Method for Calibrating the GDS Compensated Output Driver with Current Control

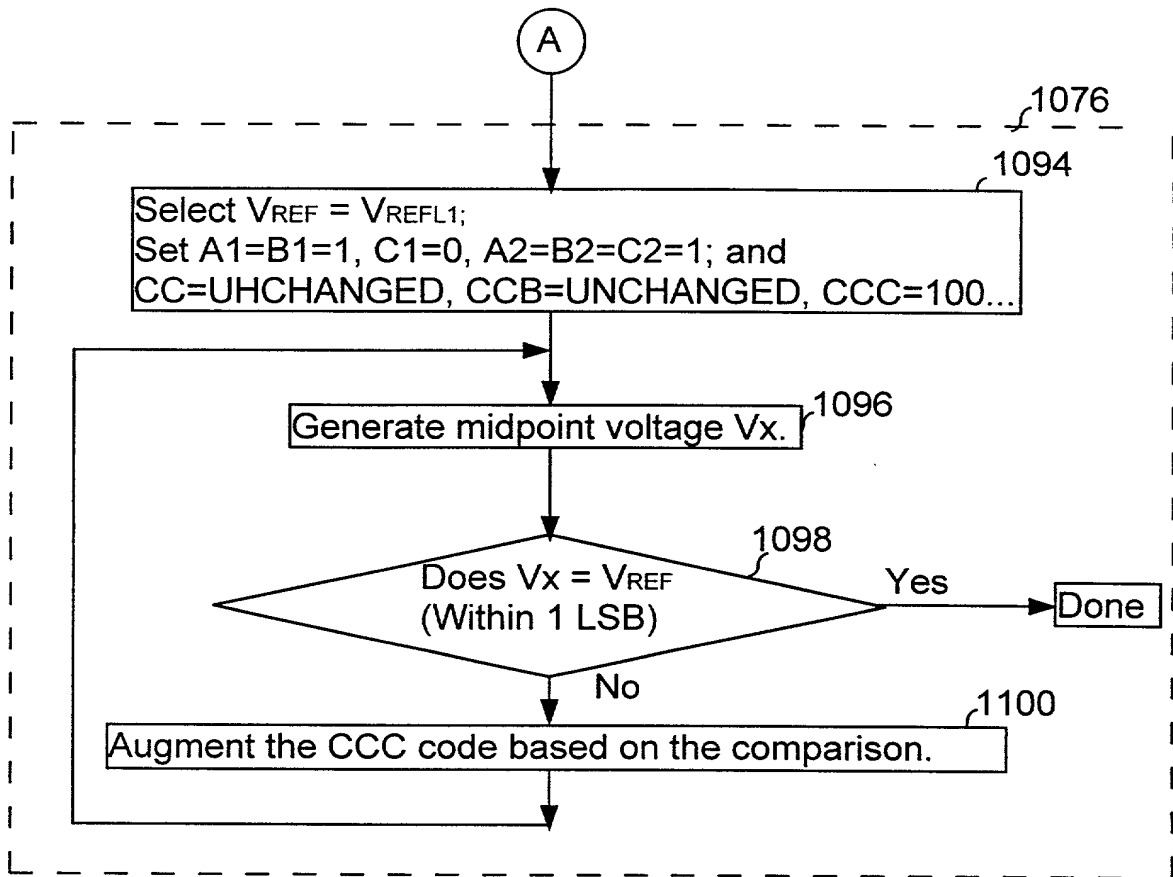FIG. 39A



Method for Calibrating the GDS Compensated Output Driver
with Current Control

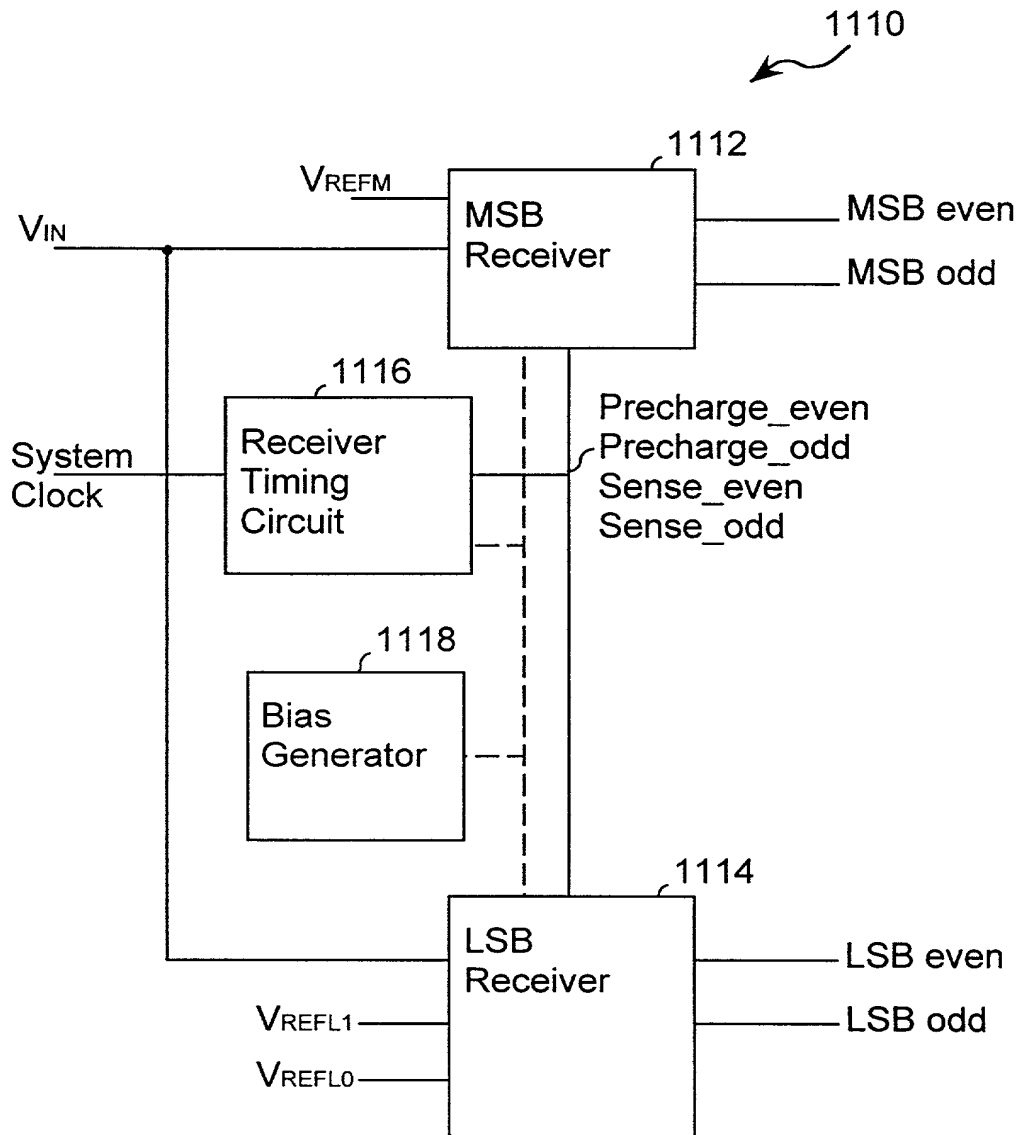FIG. 39B



Multi-PAM Receiver
FIG. 40

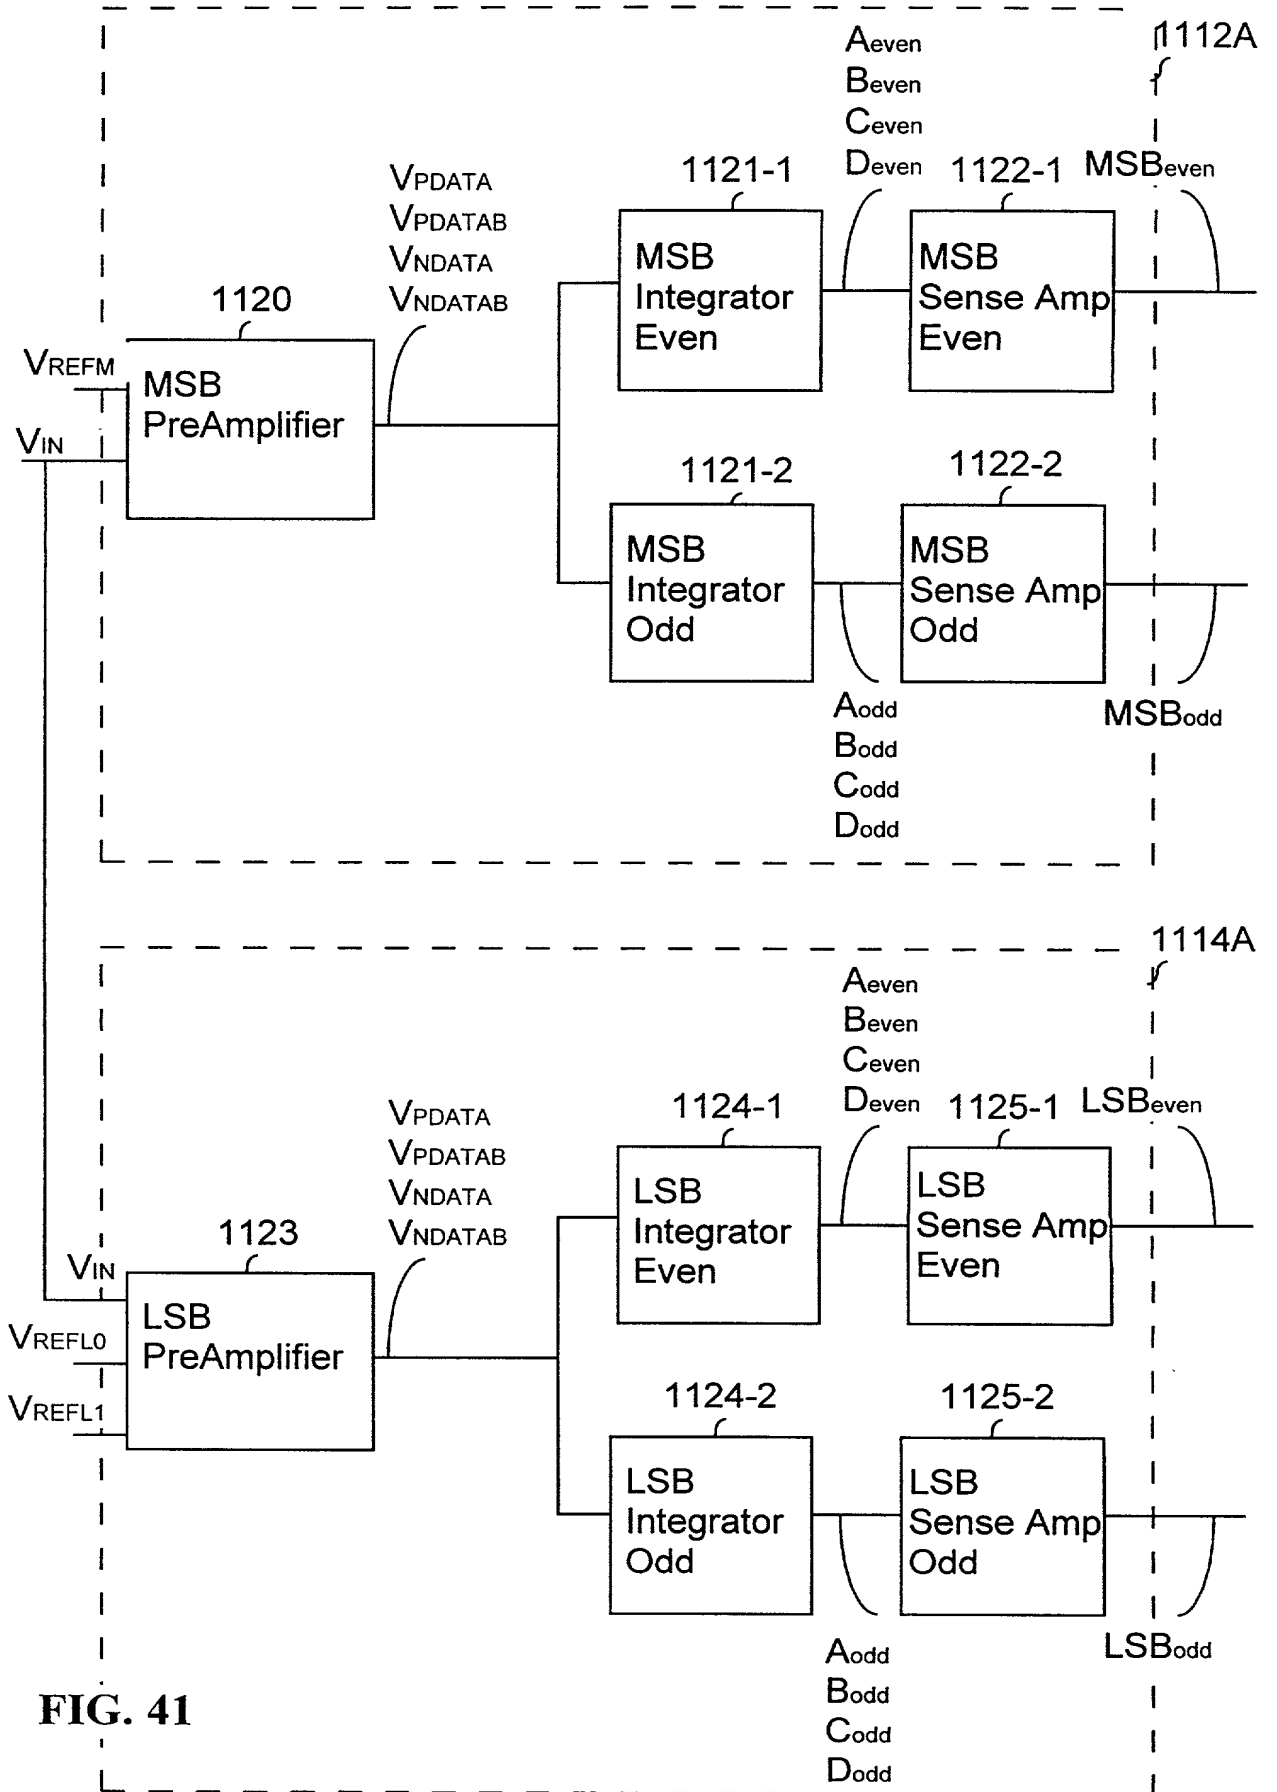


FIG. 41


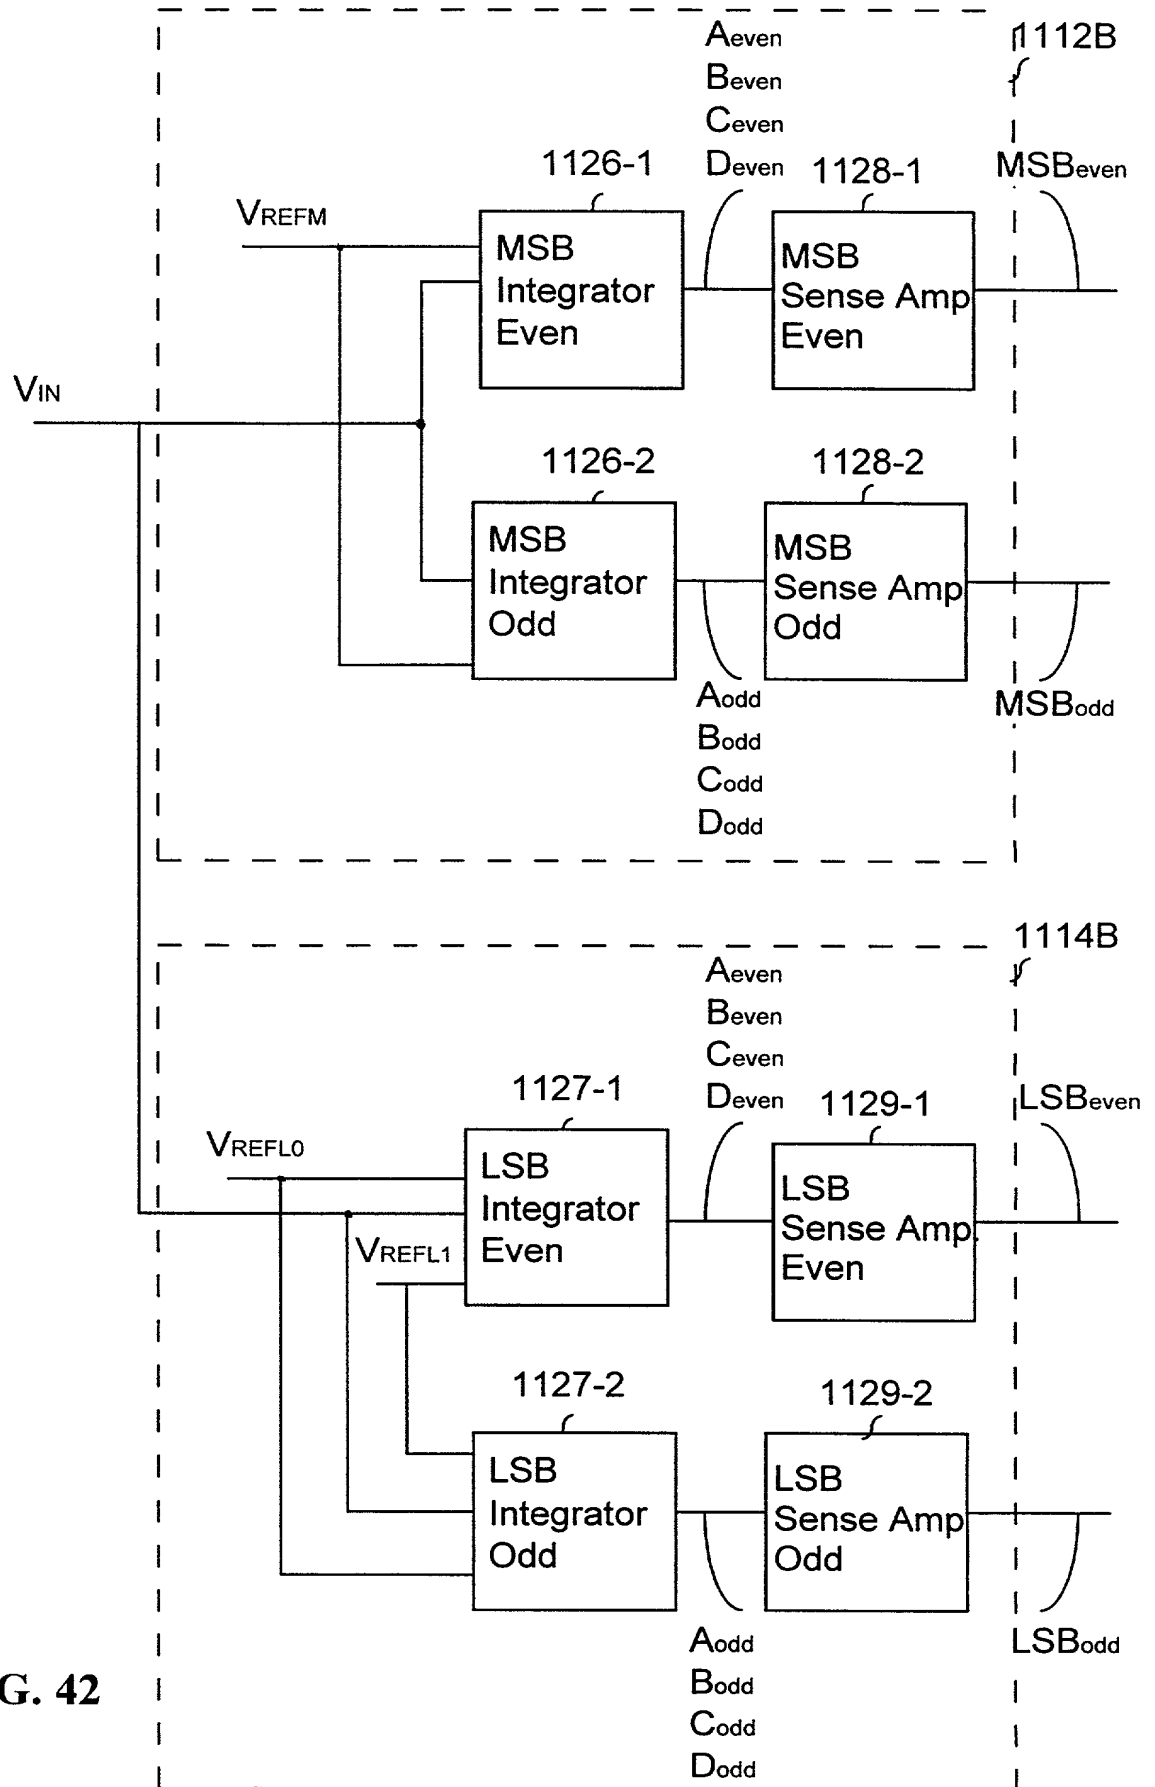



FIG. 42

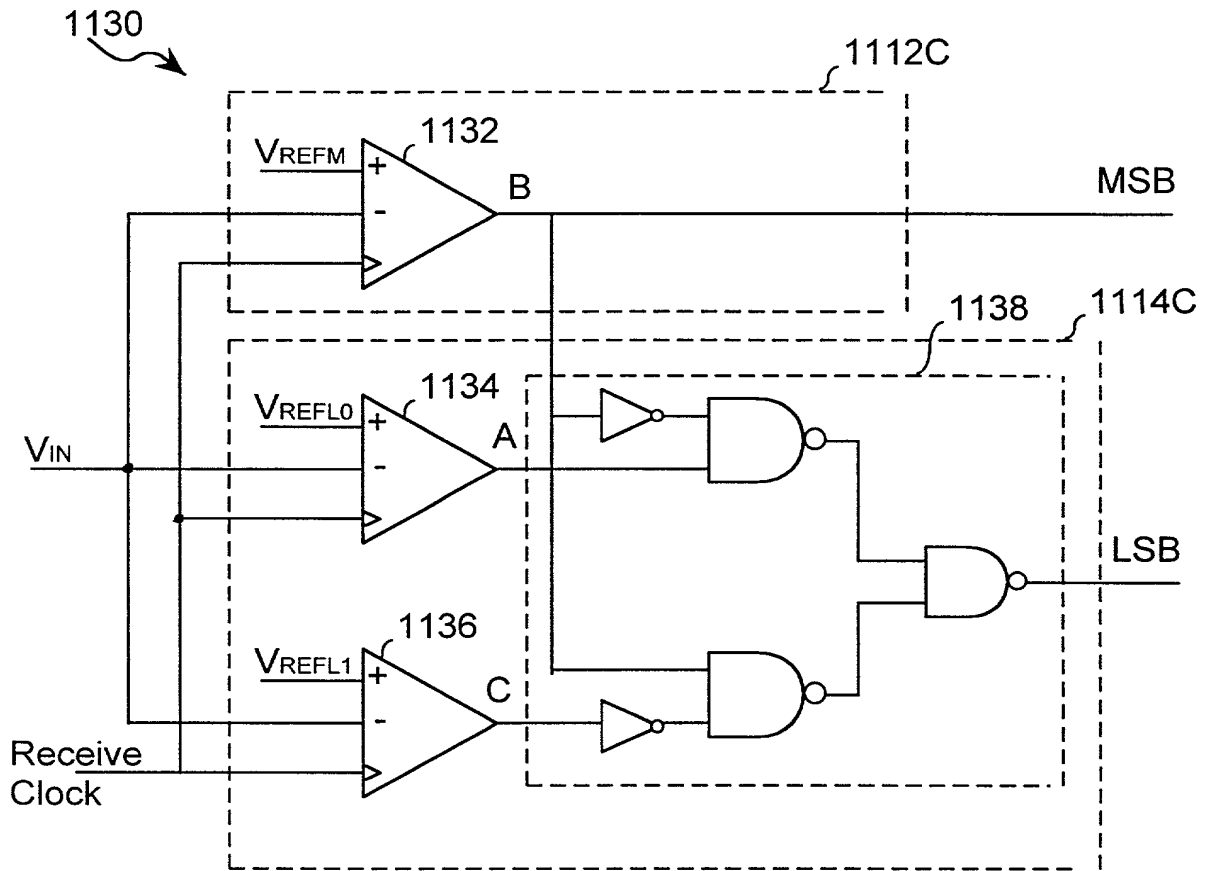MULTI-PAM RECEIVER




Multi-PAM Receiver

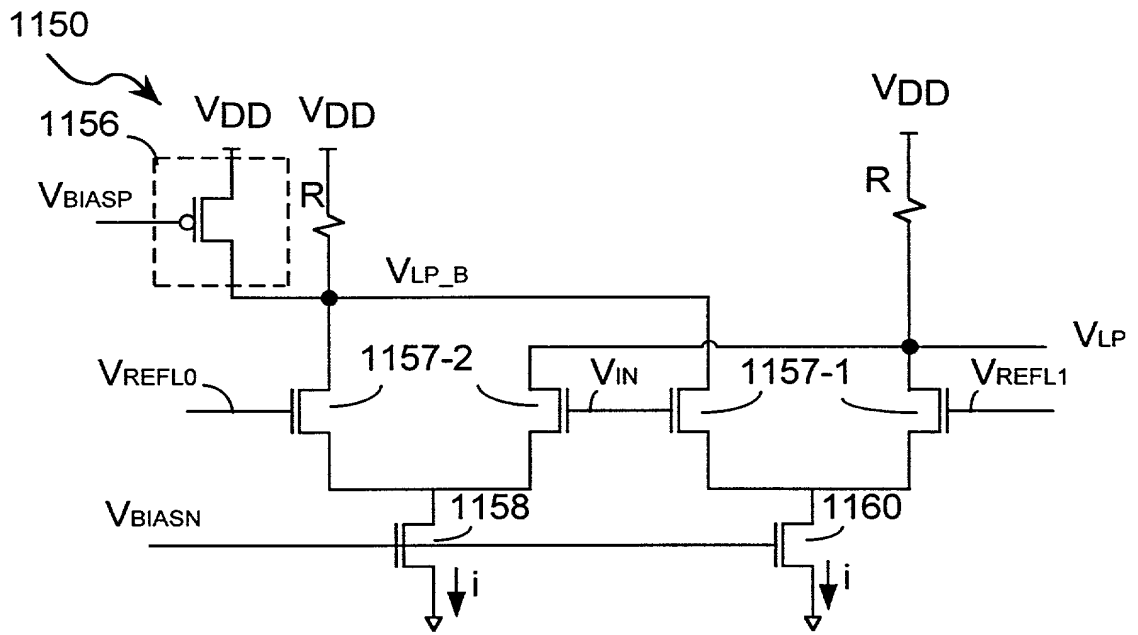FIG. 43




Multi-PAM Pre-Amplifier

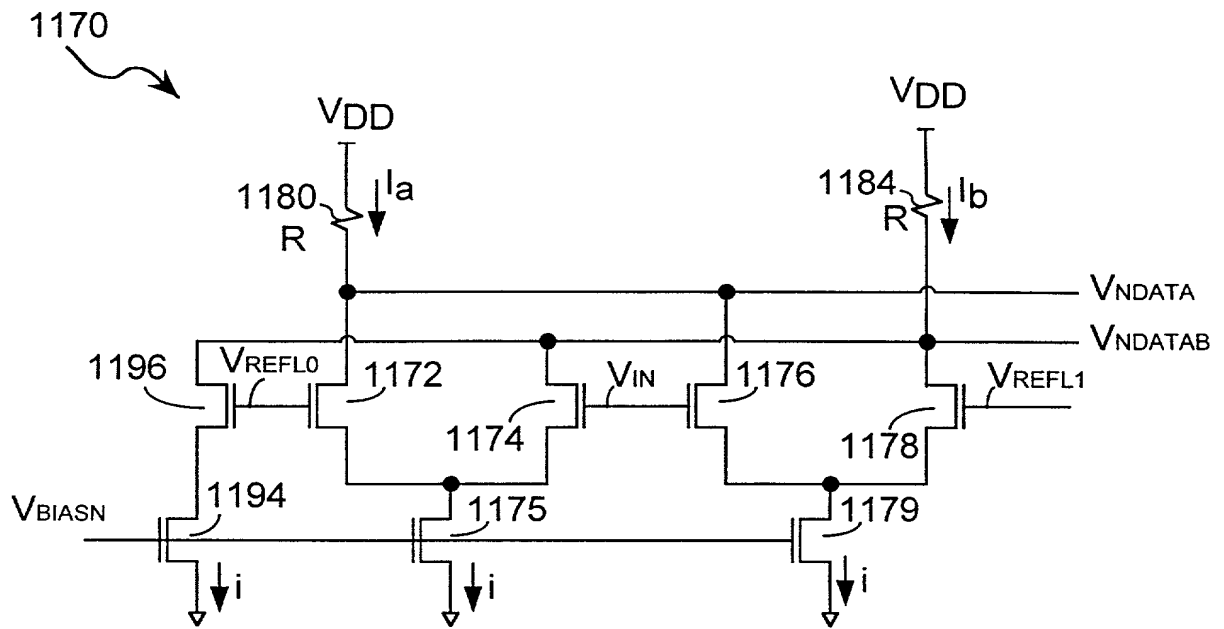FIG. 44




Multi-PAM Pre-Amplifier

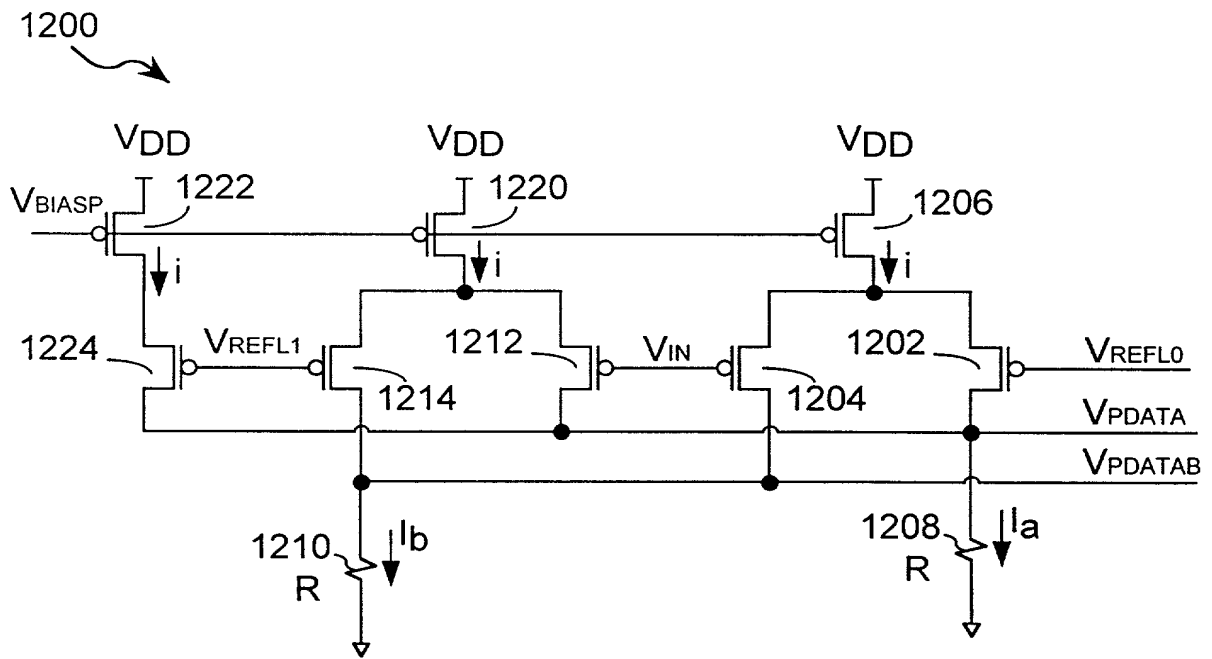FIG. 45A



Multi-PAM Pre-Amplifier

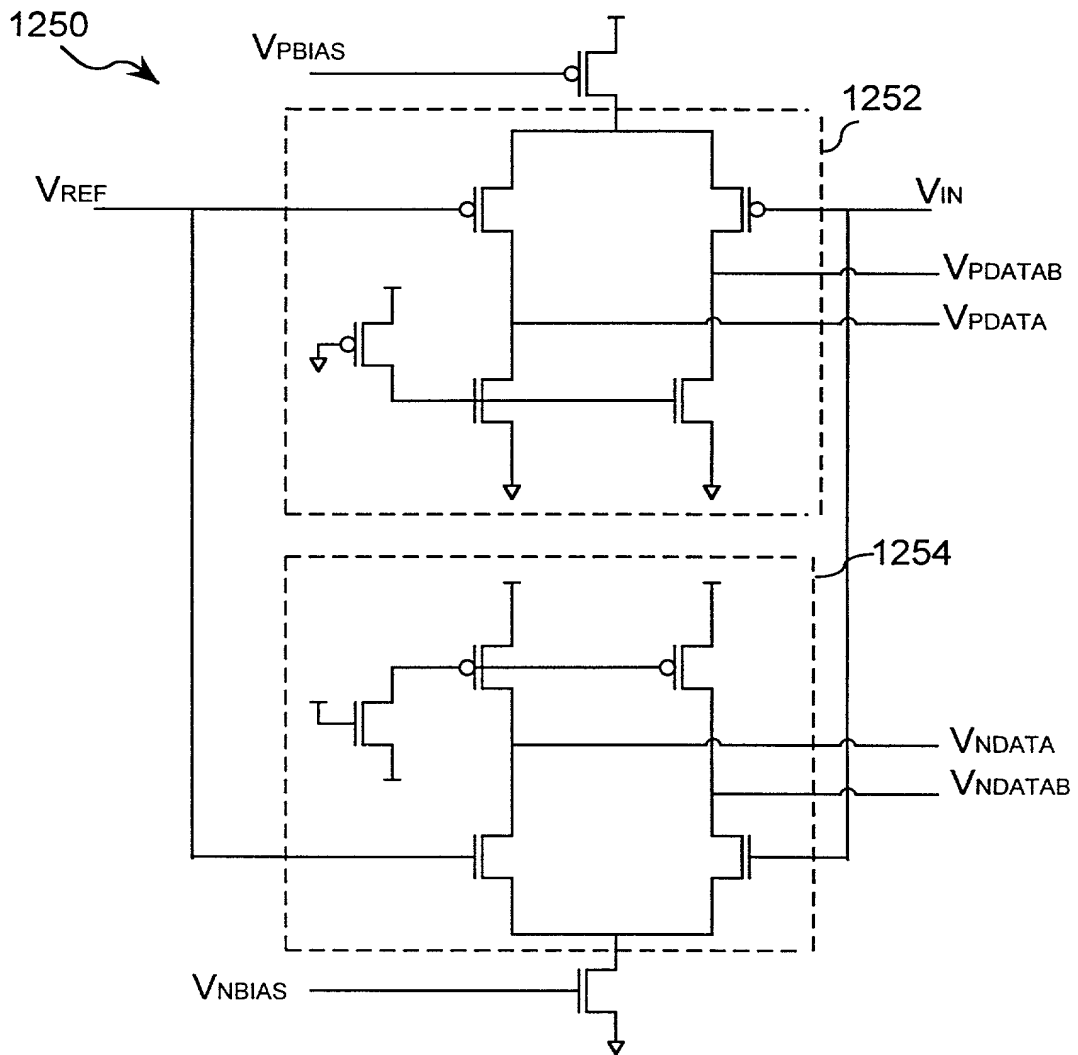FIG. 45B



Multi-PAM Pre-Amplifier for MSB

FIG. 46

1330 ↗



FIG. 47.

REFERENCE VOLTAGES	CODE			i_A	i_B	i_C	i_D
	MSB	LSB					
V_{REFL0}	0	0	i	$2i$	$2i$	i	
V_{REFM}	0	1	$2i$	i	i	$2i$	
V_{REFL1}	1	1	$2i$	i	i	$2i$	
	1	0	i	$2i$	$2i$	i	

FIG. 48

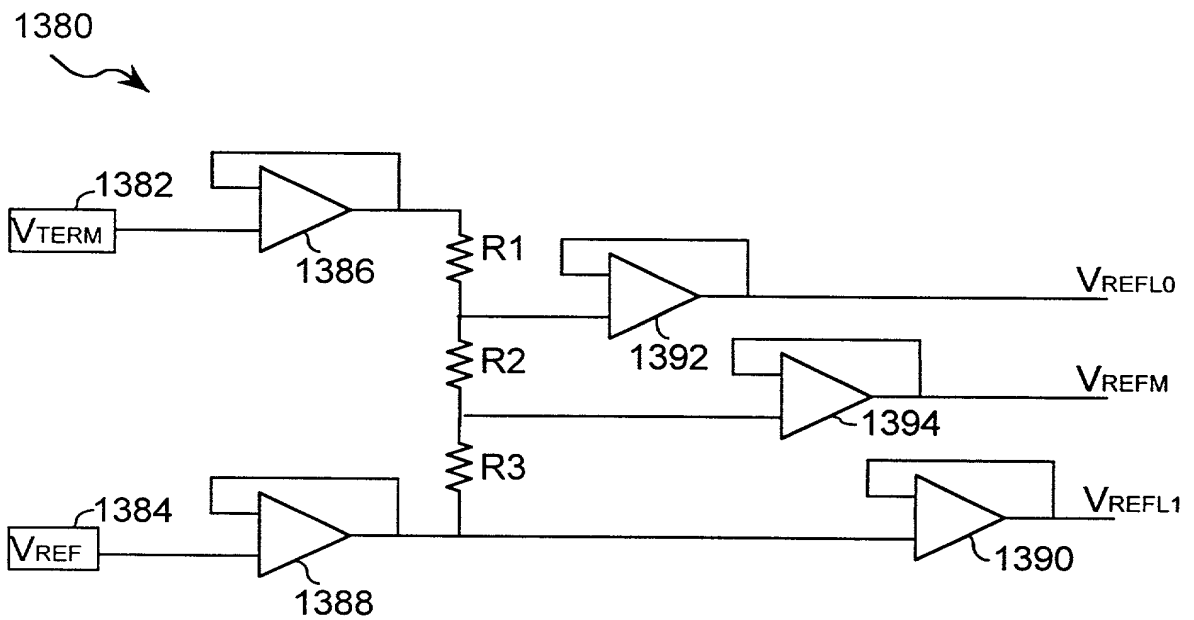


FIG. 49

RECEIVER TIMING CIRCUIT

1116


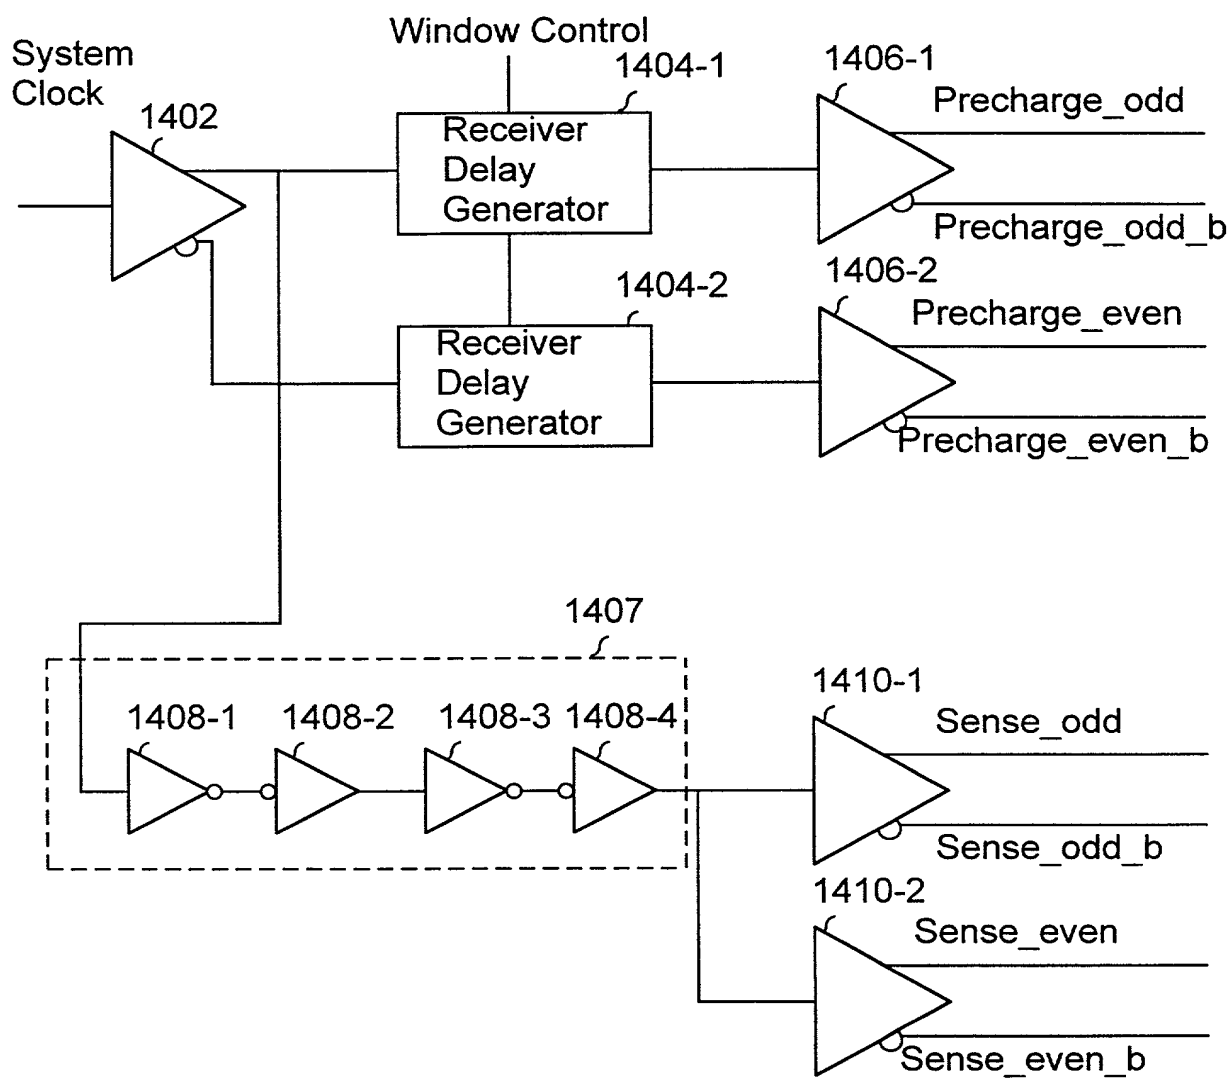


FIG. 50

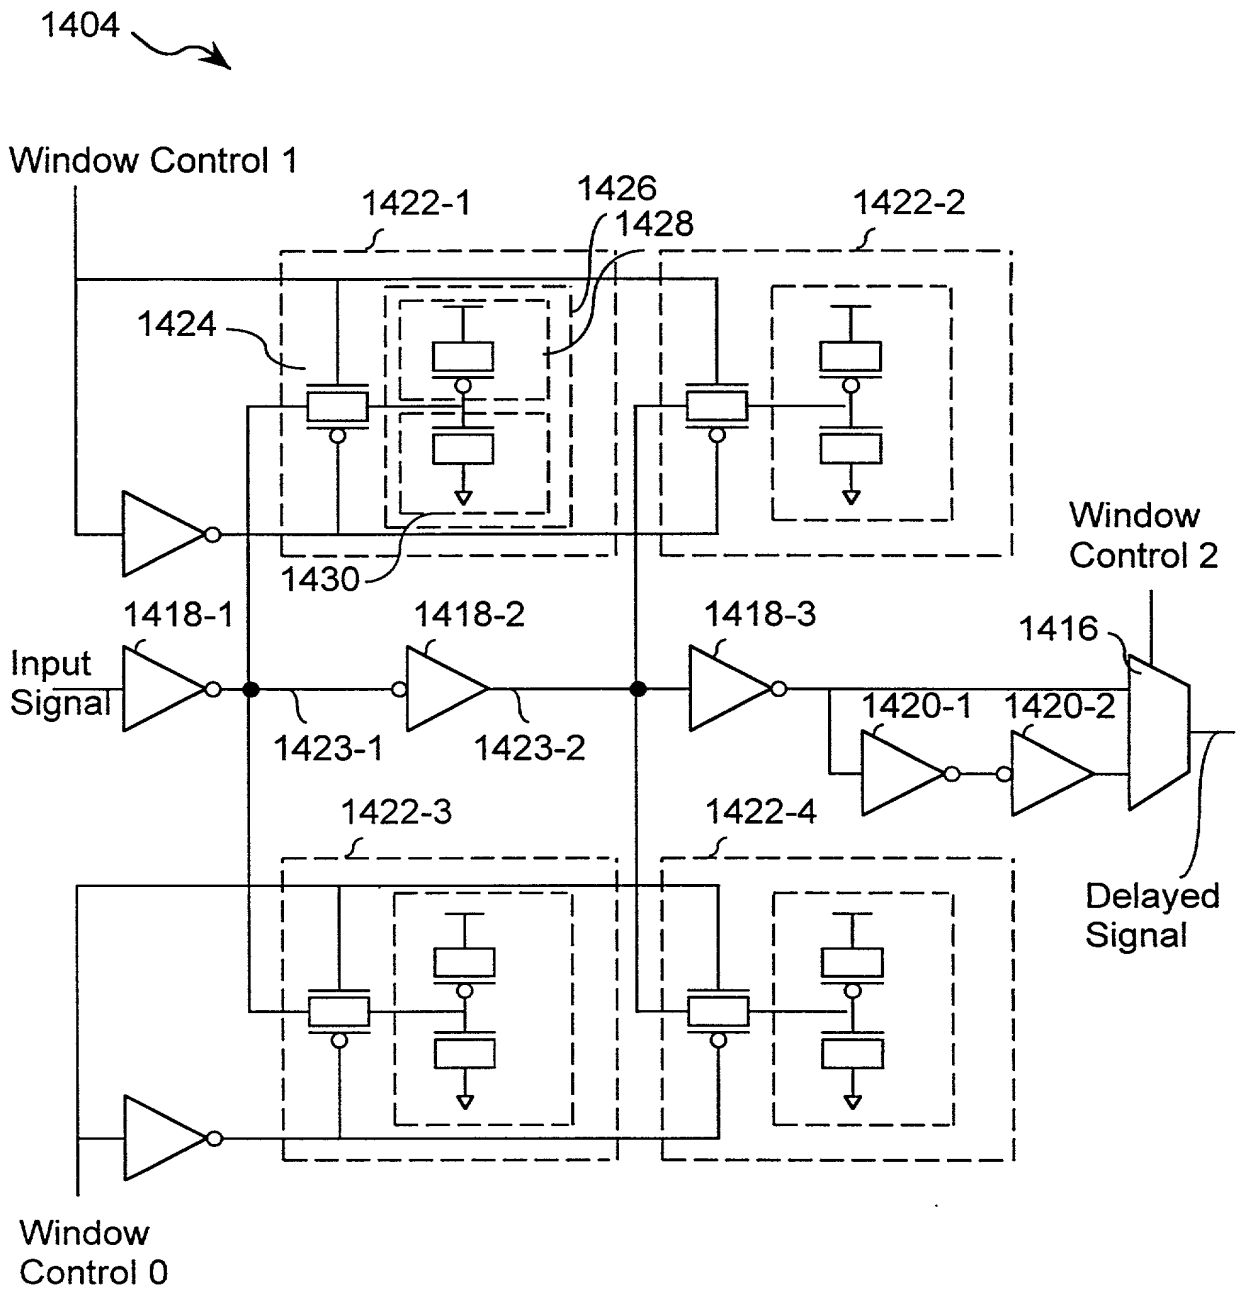

Receiver Delay Generator

000010" 91684160


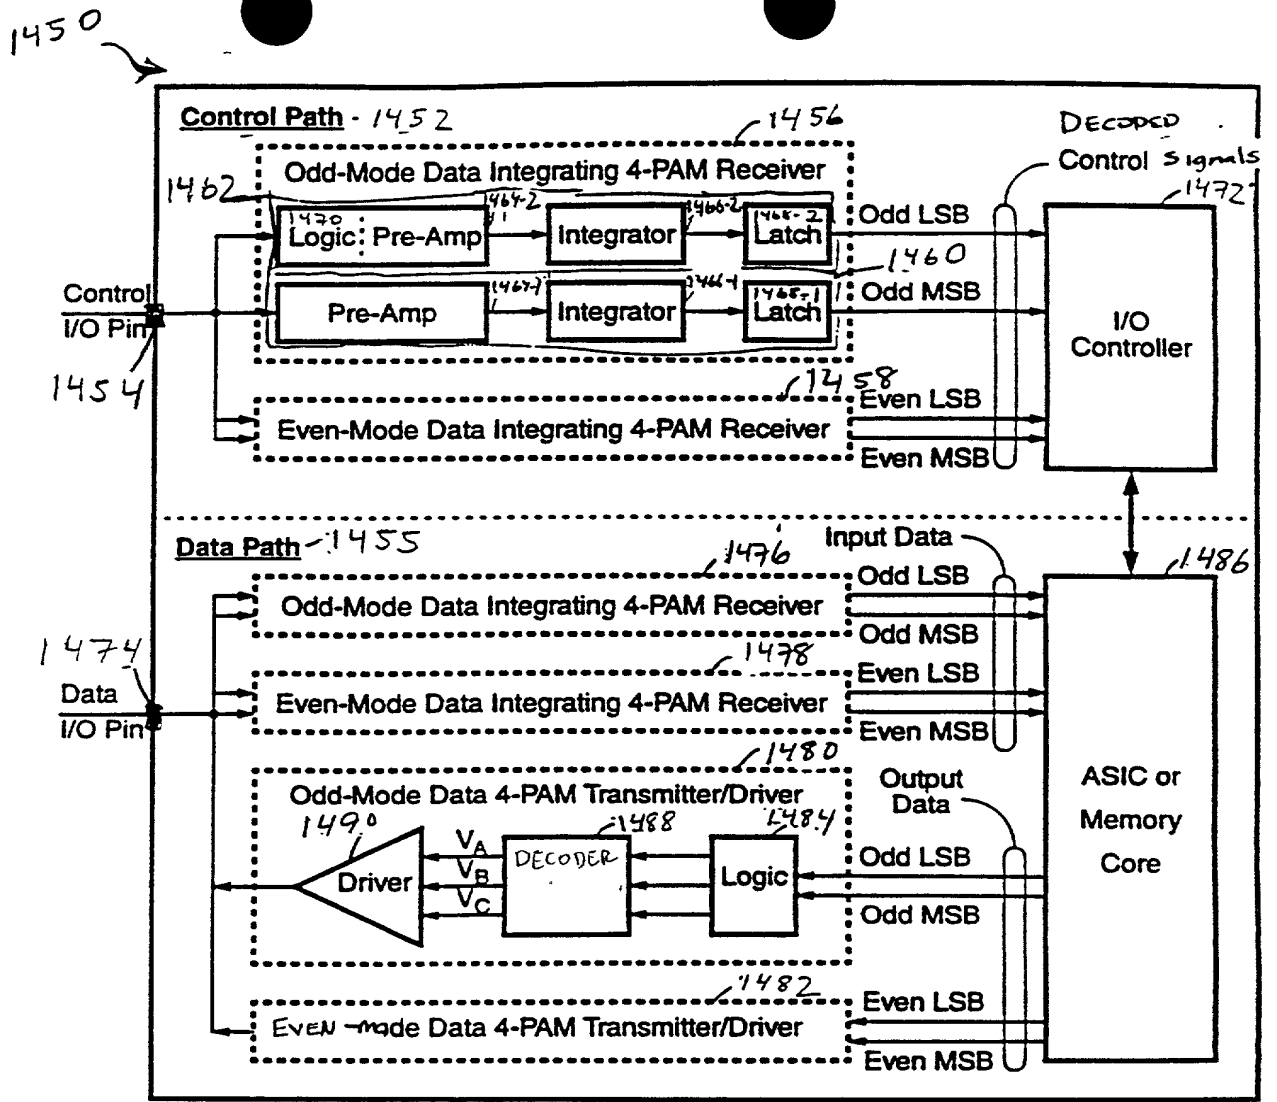


FIG. 52A

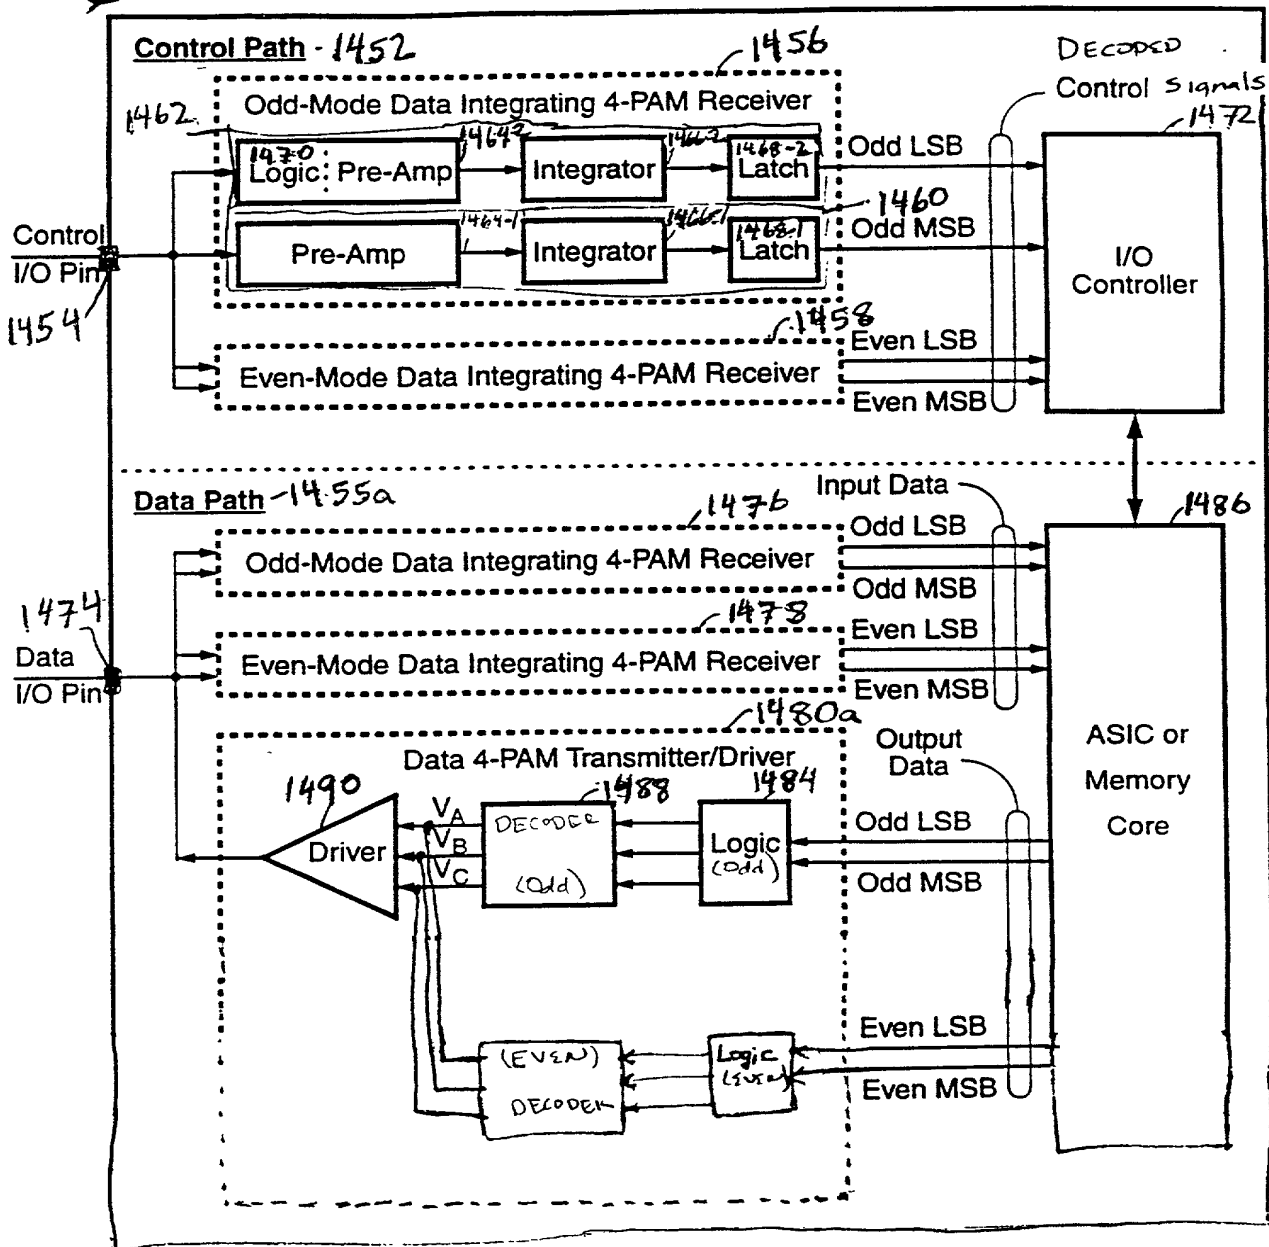1450 →



Automatic Detection of 2-PAM or 4-PAM Mode

FIG. 53

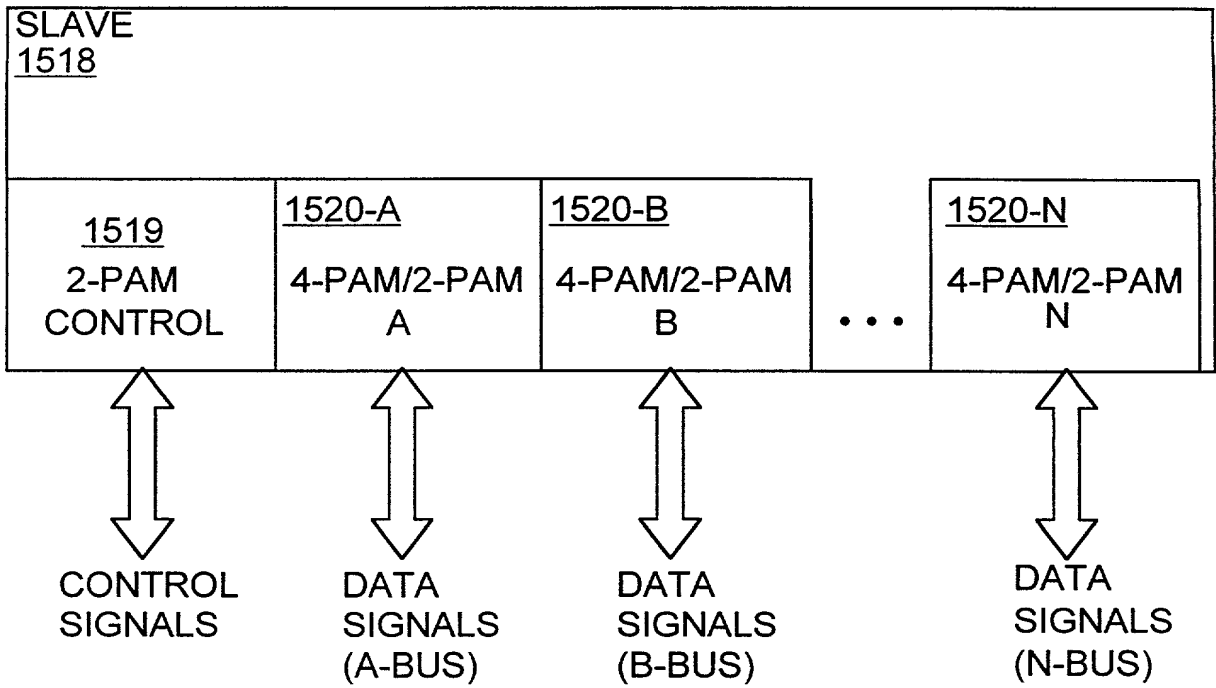


FIG. 54A

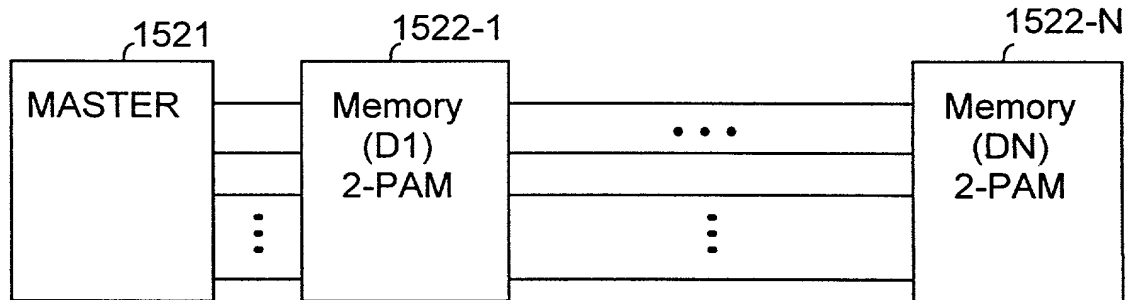


FIG. 54B


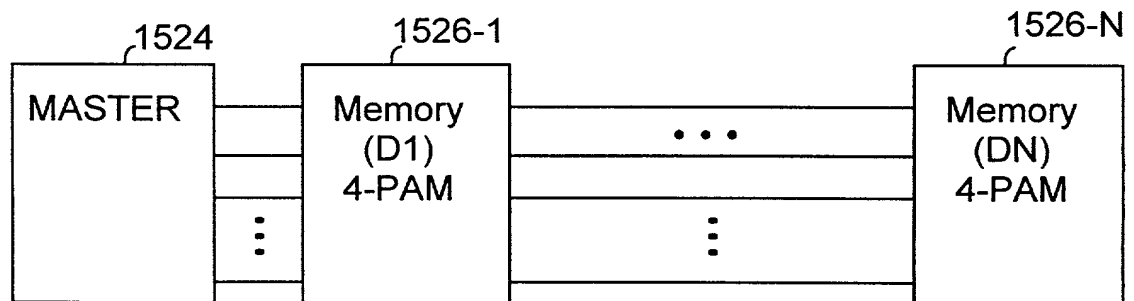
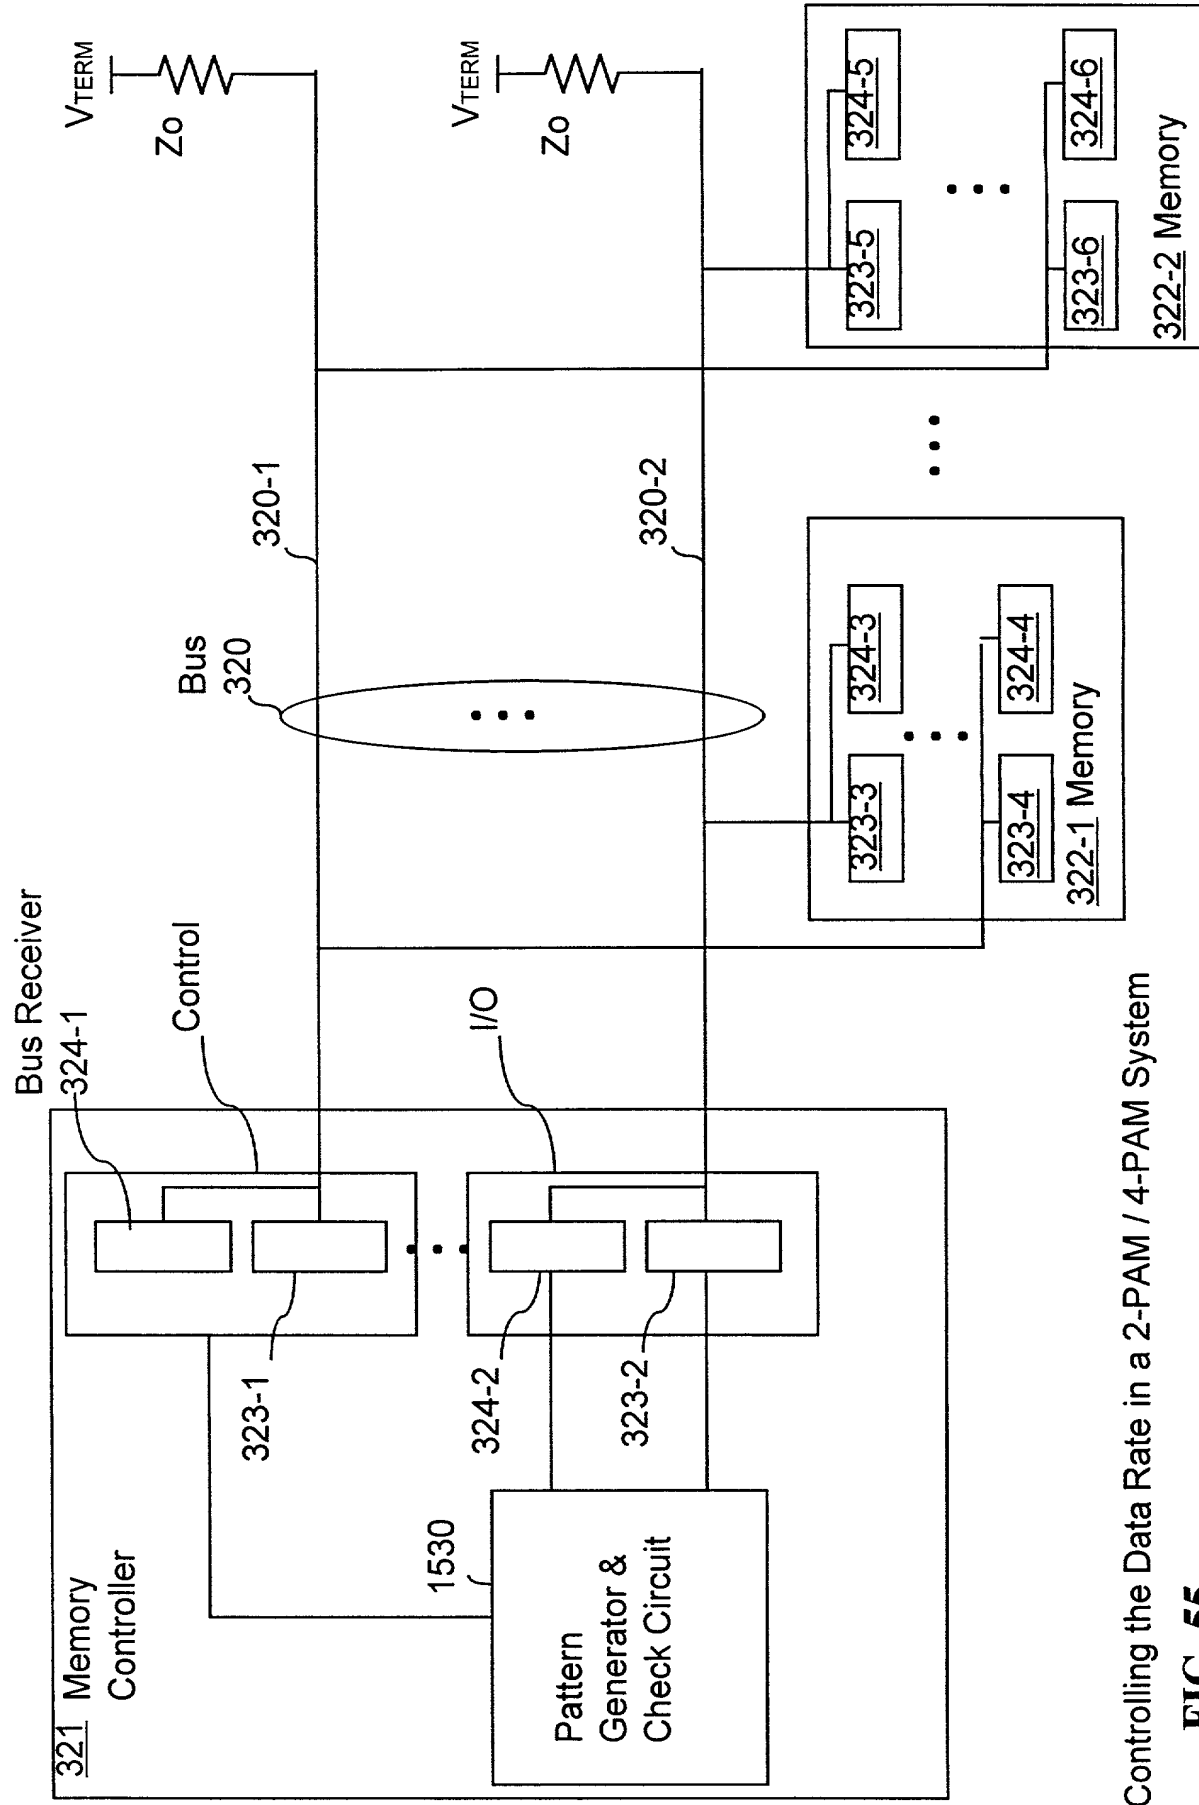


FIG. 54C

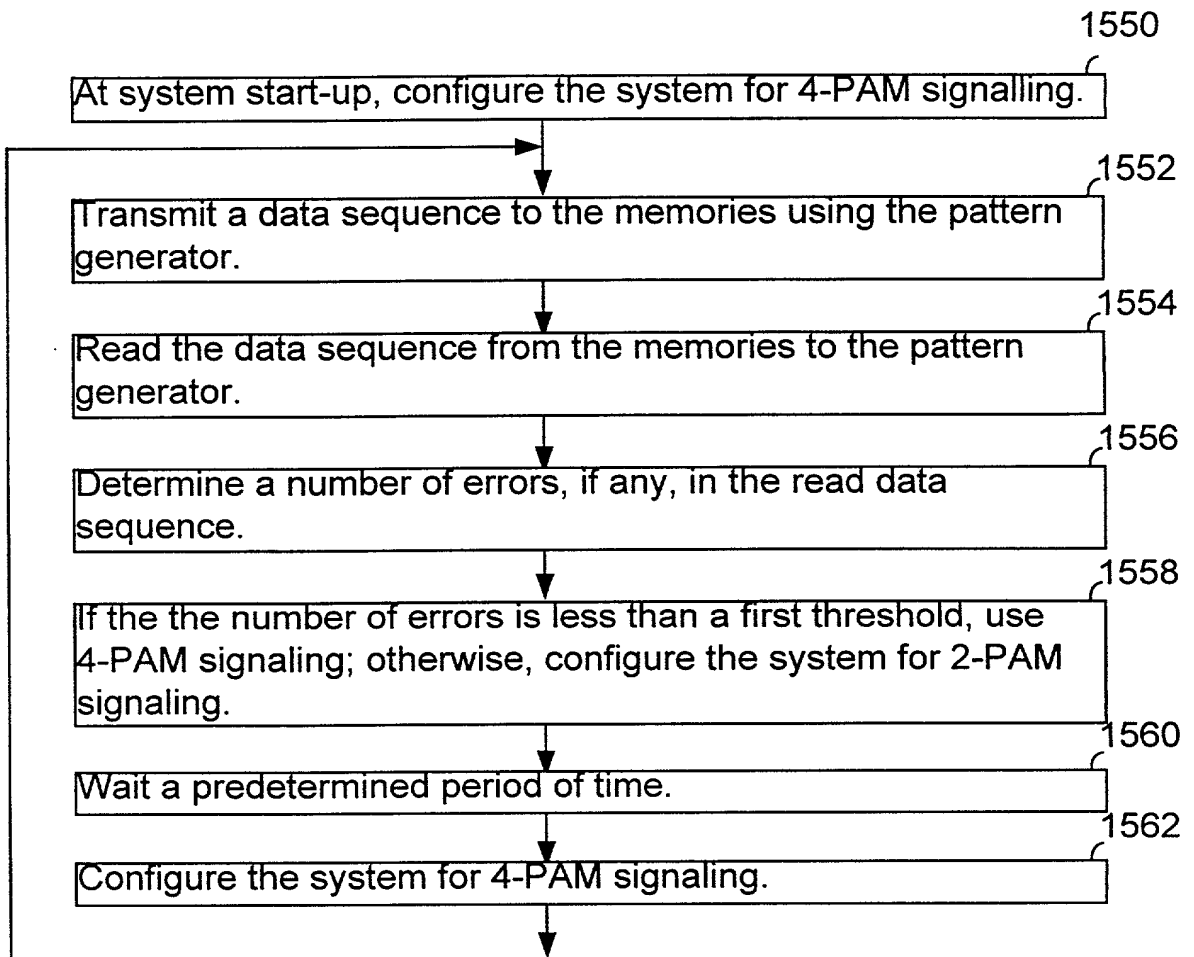

Controlling the Data Rate in a 2-PAM / 4-PAM System

FIG. 55

[illegible]

Method for Determining 4-PAM / 2-PAM Signalling as a Function of Error Rate

FIG. 56

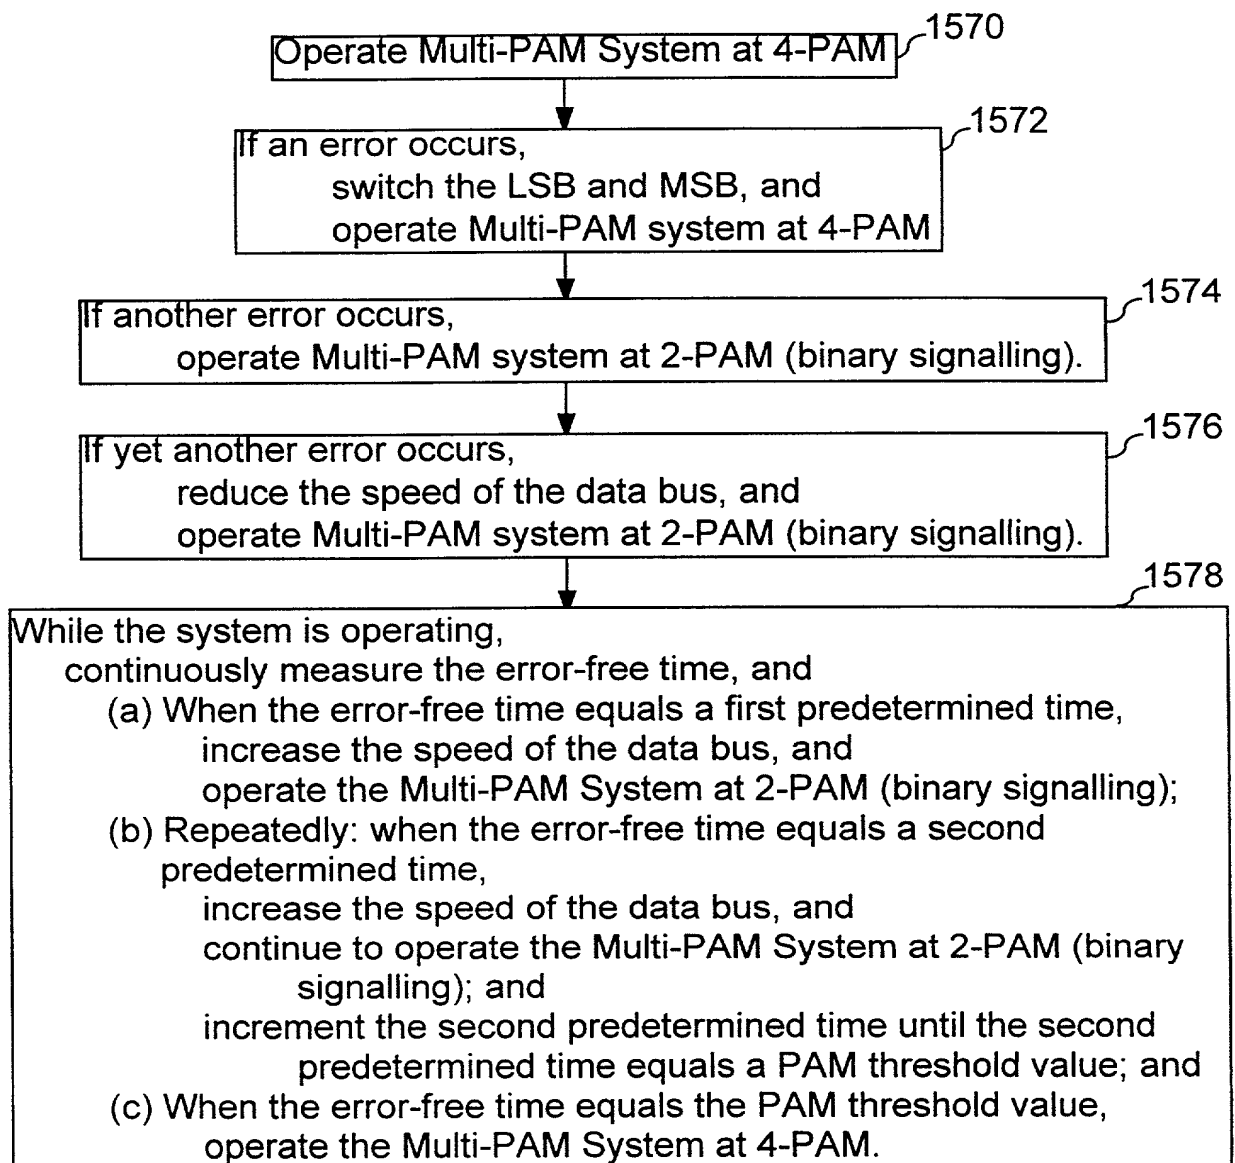


FIG. 57

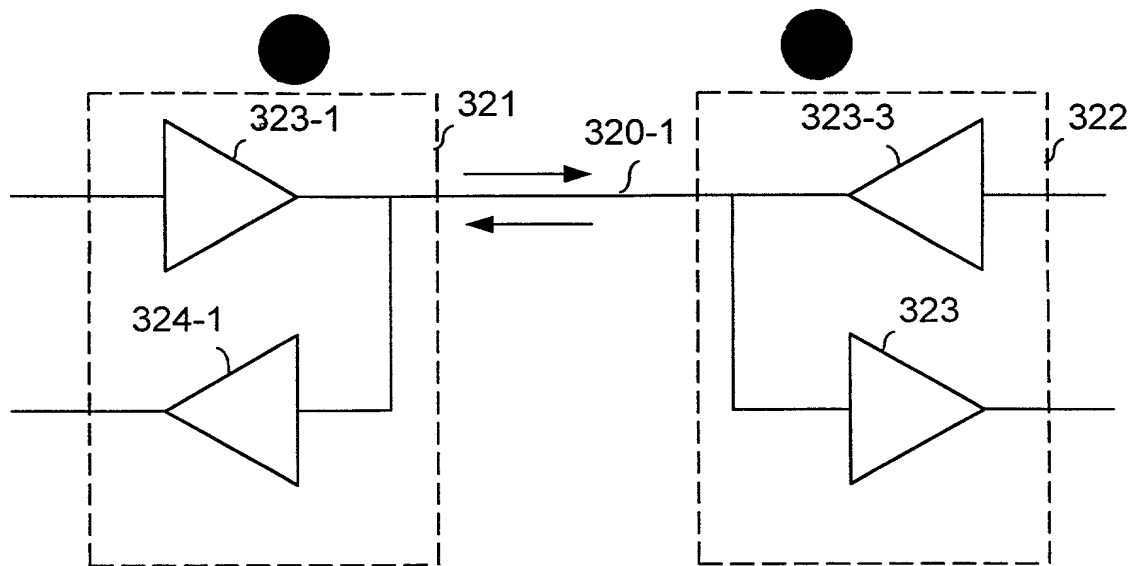


FIG. 58


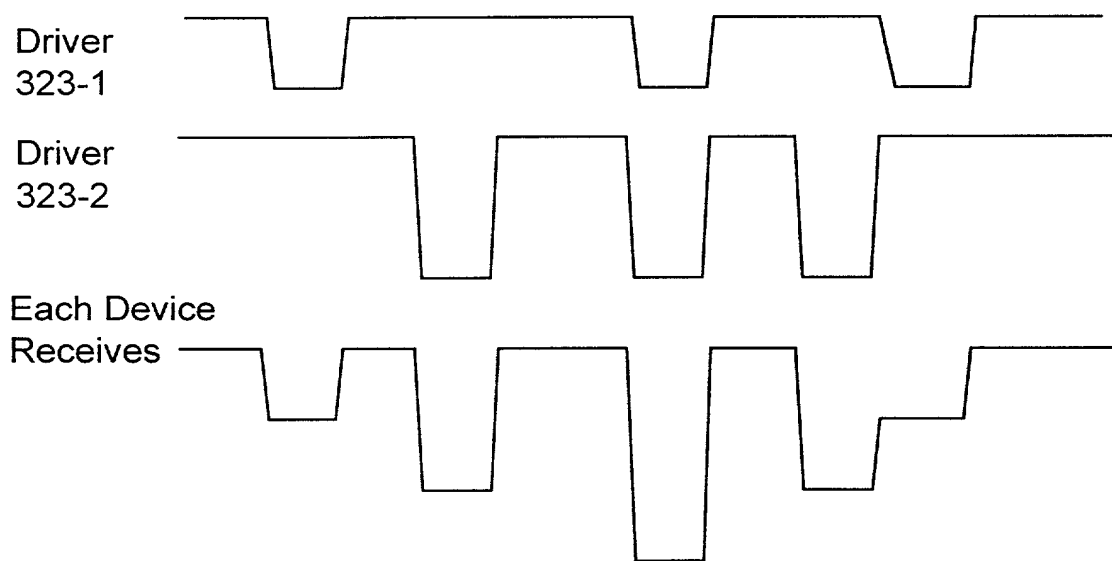
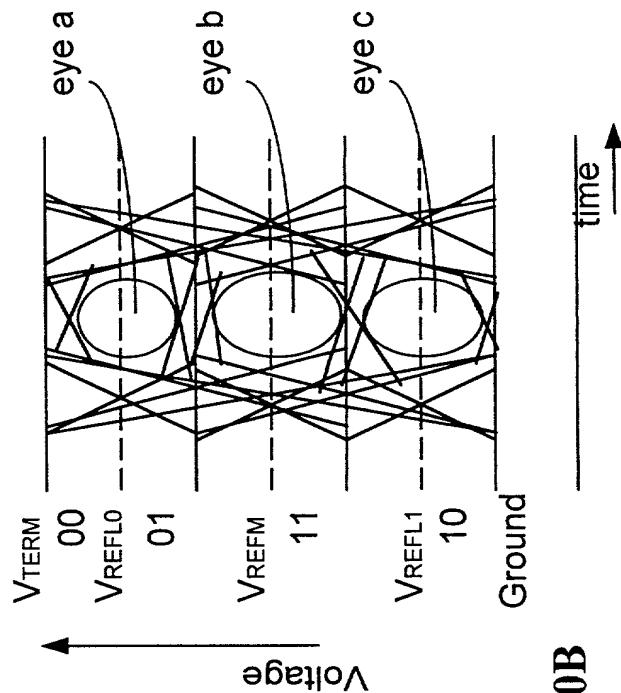


FIG. 59

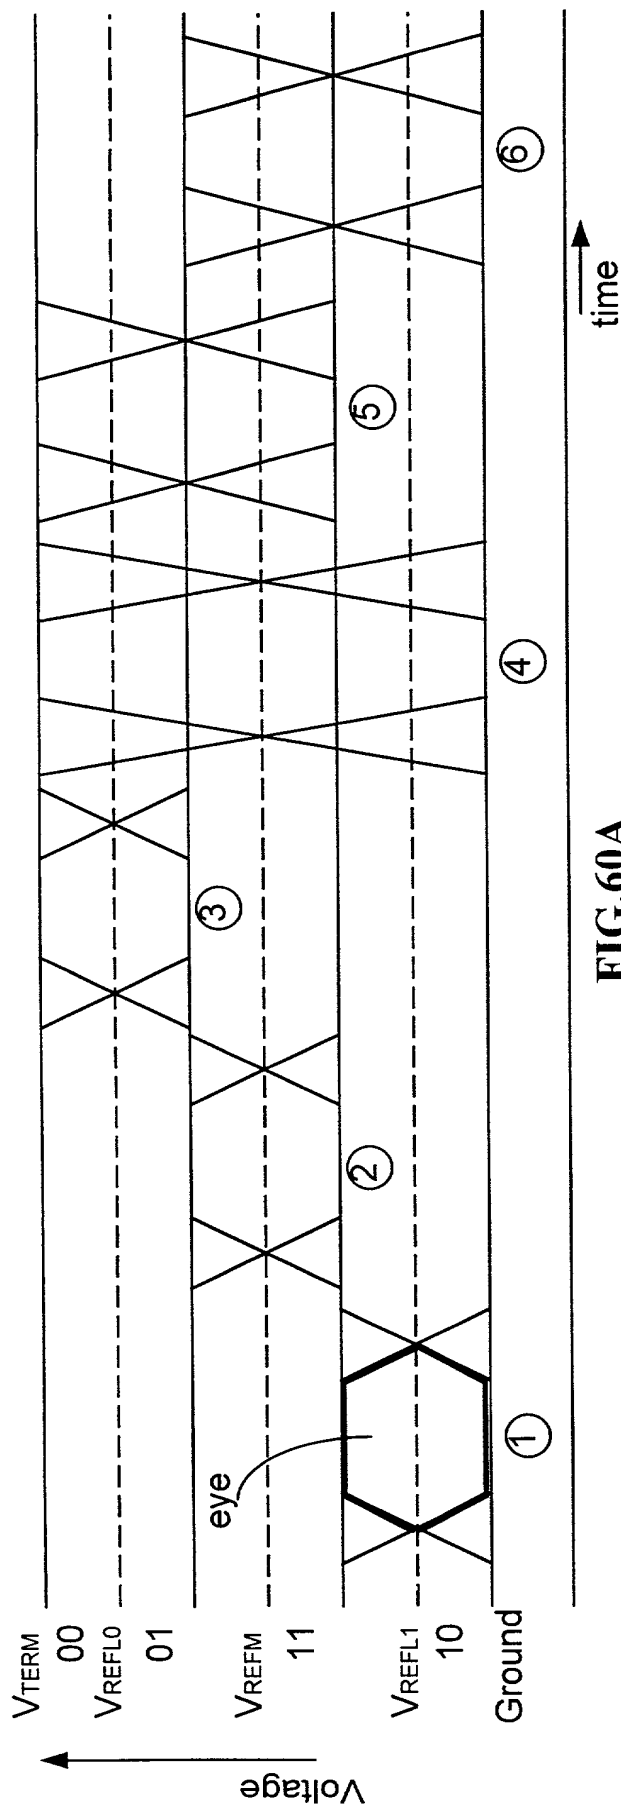

[illegible]

My residence, post office address and citizenship are as stated below next to my name,

(check one) X is attached hereto.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to the examination of this application in accordance with Title 37, Code of Federal Regulations, §1.56(a).

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below.

60/158,189
(Application Serial No.)

10/19/99
(Filing Date)

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
----------	-----------	------------------------	-----	----

(Number)	(Country)	(Day/Month/Year Filed)	Yes	No
----------	-----------	------------------------	-----	----

I hereby claim the benefit under Title 35, United States Code, §120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulation, §1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.) (Filing Date) (Status)
(patented, pending, abandoned)

(Application Serial No.) (Filing Date) (Status)
(patented, pending, abandoned)

(Application Serial No.) (Filing Date) (Status)
patented, pending, abandoned)

Direct all telephone calls to **Gary S. Williams** at (650) 493-4935.

Address all correspondence to:

PENNIE & EDMONDS LLP
3300 Hillview Avenue
Palo Alto, California 94304

File No. 9797-050-999

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Title 18, United States Code, §1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of

first inventor: JARED L. ZERBE

Inventor's signature: _____

Date: _____

Residence: WOODSIDE, CALIFORNIA

Citizenship: U.S.A.

Post Office Address: 431 HILLSIDE DRIVE

WOODSIDE, CALIFORNIA 94062

Full name of
fifth inventor: MARK A. HOROWITZ

Inventor's signature: _____

Date: _____

Residence: MENLO PARK, CALIFORNIA

Citizenship: U.S.A.

Post Office Address: 1309 SAN MATEO DRIVE
MENLO PARK, CALIFORNIA 94025

Full name of
sixth inventor: STEFANOS SIDIROPOULOS

Inventor's signature: _____

Date: _____

Residence: PALO ALTO, CALIFORNIA

Citizenship: GREECE

Post Office Address: 731 ELLSWORTH STREET
PALO ALTO, CALIFORNIA 94036

Full name of
seventh inventor: BILLY W. GARRETT, JR.

Inventor's signature: _____

Date: _____

Residence: MOUNTAIN VIEW, CALIFORNIA

Citizenship: U.S.A.

Post Office Address: 928 WRIGHT AVENUE, #405
MOUNTAIN VIEW, CALIFORNIA 94043

Full name of
eighth inventor: CARL W. WERNER

Inventor's signature: _____

Residence: SAN JOSE, CALIFORNIA

Post Office Address: 1449 CARRINGTON CIRCLE